

Finish Mowers



BUSH HOG®

IF IT DOESN'T SAY
BUSH HOG®
IT JUST WON'T CUT IT™

HDTH SERIES | TDC TRI-DECK SERIES




FINISH MOWERS

**HDTH
SERIES**

HDTH5 / HDTH6 / HDTH7 / HDTH8

Bush Hog® HDTH “Turf Hog” Finish Mower

Turn your tractor into a lawn mowing machine with the new HDTH “Turf Hog” Finish Mowers from Bush Hog®. These new Finish Mowers deliver superior grass cutting performance for your well-kept lawn. With models ranging from 5' - 8', our HDTH Finish Mowers help you save time spent cutting your lawn, and more time enjoying it. Built Bush Hog® tough in Selma, AL, our new HDTH Finish Mowers are manufactured to the highest quality standards for durability and performance.

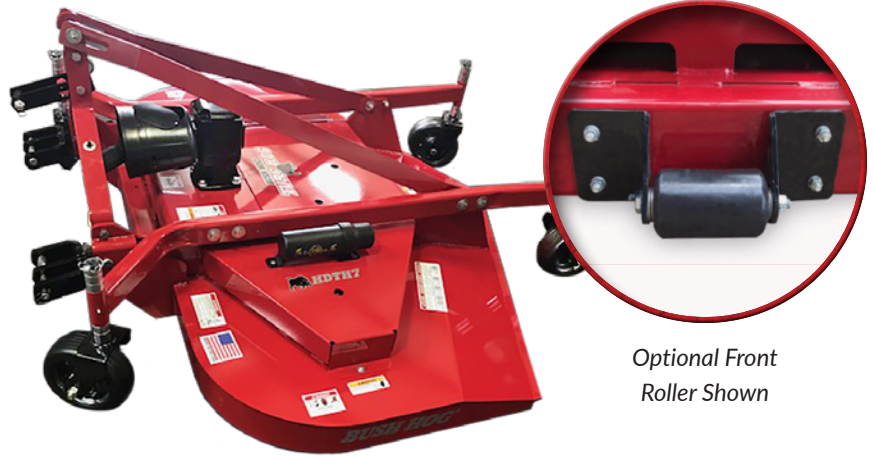

*Optional Front
Roller Shown*

Powerful but smooth even in the toughest grasses!

- 1 Year Limited Warranty with a 5 Year Gearbox Warranty
- 60 - 99 inch Cutting Widths
- Minimum Required HP of 15 - 35 to meet the needs of today's smaller, compact tractors
- Quick Hitch compatibility on all models allows for easier hook up
- Dual floating hitch points allow the mower to rise and fall with the contour of terrain
- Blade Tip Speeds over 18,200 feet per minute ensure a clean cut every time
- 1 ½" blade overlap eliminates streaking
- Cutting height adjustment is made with the pull of a pin, and ranges from 1 ½" to 6 ½"
- New dove-tail rear discharge design steadily slopes downward eliminating the need for any type of chain shielding, thereby reducing the possibility of clumping or thrown objects
- Durable 7 gauge steel decks
- Sideband depth increased to 5" to allow additional flow of cut material under deck reducing clipping size
- Greasing blade spindles and idlers is easy with openings in deck
- Adjustable Spring-Loaded Idlers maintain proper belt tension
- Axle arms are offset to reduce grass compaction and tire tracking
- Strong Aramid fiber belts reduce stretching
- Spring-style lynch pins prevent accidental snags keeping casters locked in place

FINISH MOWER SPECIFICATIONS

MODELS:	HDTH5	HDTH6	HDTH7	HDTH8
Cutting Width	60"	72"	84"	99"
Cutting Height (1/2" increments)	1 ½" - 6 ½"			
Tractor HP Range	15-35 PTO	20-40 PTO	30-55 PTO	35-55 PTO
Hitch Type	Cat. 1 Std & QH		Cat. 1, Cat. 2 Std & QH	
Blade Size	1/4" x 2 ½" x 21"	1/4" x 2 ½" x 25"	5/16" x 2 ½" x 29"	1/4" x 2 ½" x 21"
Number of Blades	3			5
Blade Tip Speed	18,231 FPM	18,272 FPM	18,266 FPM	
Blade Overlap	1 ½"			
Blade Uplift	60"			
Driveline Size	ASAE Cat. 3			
Front Roller (optional)	3" x 5"			3" x 13"
Discharge	Rear			
Deck Thickness	7-Gauge Steel Plate			
Tires	3 ¼ x 10 Solid		4 x 10 Solid	5 x 13 Solid
Belts	(1) "B" Size Aramid Cord			(2) "B" Size Aramid Cord
Belt Adjustment	Spring-Loaded Idler			
Gearbox	45 HP		55 HP	
Approx. Weight	672 lb.	730 lb.	954 lb.	1190 lb.
Warranty	1-Year Limited Warranty with a 5-Year Limited Gearbox Warranty			

TRI-DECK FINISH MOWERS

TDC
SERIES

TDC-1200 / TDC-1500 / TDC-1700

Bush Hog® TDC Tri-Deck Finishing Mower

The Bush Hog® TDC Series Tri-Deck Finishing Mower delivers a superior cut across large mowing zones and is ideal for residential and professional use. Built rugged to last, the TDC series offers you the dynamic control features necessary to achieve a fine cut over a variety of terrains. Mowing widths from 12' – 17' that make short work of large expanses are equally complemented by adjustable wings that flex and float over uneven ground for a finely groomed appearance.




Durable Features & Reliable Design – For a Fine Finish Cut Acre After Acre

- 12-ft., 15-ft., 17-ft. Mowing Widths
- Adjustable Cutting Height: 1" – 5"
- Single Action Hydraulic Folding Wings
- Adjustable Telescoping Wings – Control Overlap
- Completely Independent Free Floating Decks
- High Blade Tip Speed with Precision Overlap
- Heavy Duty Transport Frame
- Stamped Steel Reinforced Wheel Arms
- Stamped Steel Wheel Yokes
- 8 Gauge Reinforced Decks
- Heavy Duty, One Piece, Steel Pulleys
- Heavy Duty Reinforced Belts

TRI-DECK FINISH MOWER SPECIFICATIONS

MODELS:	TDC-1200	TDC-1500	TDC-1700
Cutting Width	12'	15'	17'
Cutting Height (1/4" Increments)	1" – 5"		
Tractor HP Range	25 – 80 PTO	30 – 80 PTO	35 – 80 PTO
Tractor PTO Speed	540		
Hitch Type	Cat. 1 & 2, Drawbar		
Front Hitch	Adjustable 6 Position		
Number of Blades Per Deck (Total)	3 (9)		
Blade Tip Speed	15,747 FPM	16,863 FPM	16,732 FPM
Center Deck Cutting Width (ft.)	5'	6'	
Wing Deck Cutting Width (ft.)	4'	5'	6'
Deck Overlap Adjustment (in.)	6"		
Degree of Cutting Attitude (Flex)	30° Up / 15° Down		
Deck Thickness	8-Gauge Steel Plate		
Splitter Gearbox HP	80 HP		
Mower Deck Gearbox HP	50 HP		
Deck Lift Cylinders (in.)	2.5" x 10" Single Acting		
Main Driveline	Cat. 6 Constant Velocity with Slip Clutch		
Hydraulics	3 - Single Action		
Transport Width (ft.)	7.6'	8.1'	8.3'
Transport Length (ft.)	11.9'	12.2'	12.2'
Transport Height (ft.)	6.2'	7.7'	8.7'
Overall Width (ft.)	12.2'	15.2'	17.2'
Max. Overall Length (ft.)	12.7'	13'	13'
Deflector Type	Rear Safety Chains Std.		
Transport Tires (2)	20.5 x 8 – 10 Highway Rated		
Total Weight (lb.)	2,742 lb.	2,874 lb.	2,995 lb.
Warranty	1-Year Limited Warranty		



IF IT DOESN'T SAY
BUSH HOG®
IT JUST WON'T CUT IT™

2501 Griffin Avenue, Selma, Alabama 36703

Tel: 800-363-6096 | Fax: 334-874-2701



BushHog.com



CONTENT DISCLAIMER:

The products and information contained in this literature are subject to change without notice. Bush Hog® reserves the right to improve our products and make changes to specifications, designs, and standard equipment without notice. For additional product information, please visit Bush Hog®'s website or see your dealer for complete details.