

ROAD-VAULT®

MOBILE SERVICE TANKS

4,320 L and 4,500 L

The Road-Vault® Mobile Service Tank provides large volume capabilities in mobile petroleum transport.

It is engineered to provide safe mobile transportation of flammable or combustible liquids in larger volumes in a Transport Canada (TC) approved container. Easy to use and install, its portable single or double wall storage system delivers the standard features your mobile refueling application deserves complete with an ownership on safe transport practices. Best of all it is manufactured by Westeel to provide years of worry free service.

IMPORTANT FEATURES

- Durable all steel construction in a round top design
- Consists of a heavy gauge tank shell and strong embossed ends to prevent deflection under load
- All exterior surfaces prepared with a chemical wash and finished with a rugged and durable weather-resistant powder coat white
- Rugged cradles for superior weight distribution
- Strong roll guards provided
- Standard plugged tank openings include a 2" NPT fill/vent opening complete with a lock lug and TC approved vent cap, 2" NPT fill/vent opening (secondary vent) complete with a lock lug and TC approved vent cap (double wall model only), 3" NPT fusible plug, 2" NPT inspection opening, 2" NPT reinforced pump opening, 2" NPT spare opening and a 16" inspection hatch
- Designed for deck mounting on a truck or trailer
- Internal baffle for ultimate tank stability and strength

OPTIONAL EQUIPMENT

- Fluid transfer and metering equipment
- Trailer

ACCORDANCE COMPLIANCE

- CAN/CGSB-43.146 (Mobile IBC)

SPECIFICATIONS

MODEL NUMBER	KIT	CAPACITY		MAX FILL CAPACITY*		WIDTH W		LENGTH L		HEIGHT H		WEIGHT	
		Imp gal	L	Imp gal	L	in	mm	in	mm	in	mm	lb	kg
RVSM-DW950	264626	950	4320	902	4104	50	1270	145	3680	54.2	1377	2512	1140
RVSM-SW990	264627	990	4500	940	4275	50	1270	145	3680	54.2	1377	2424	1100

* TC Codes limit the maximum fill capacity of a Mobile IBC to be 95% of the tank capacity

TYPICAL APPLICATIONS

- Petroleum refueling facilities – fleet, aviation, stand-by generators, agricultural, industrial, oil and gas, forestry, mining, marine, recreational, rental applications
- Petroleum processing – oil and gas chemicals, enhancers, additives

05. 2" NPT spare fitting


06. Roll guards (standard)

07. 2" NPT inspection fitting (secondary vent – double wall only)

08. 2" NPT pump connection (pump optional)

09. Hold down strap with neoprene pad

10. Cradle (included loose)

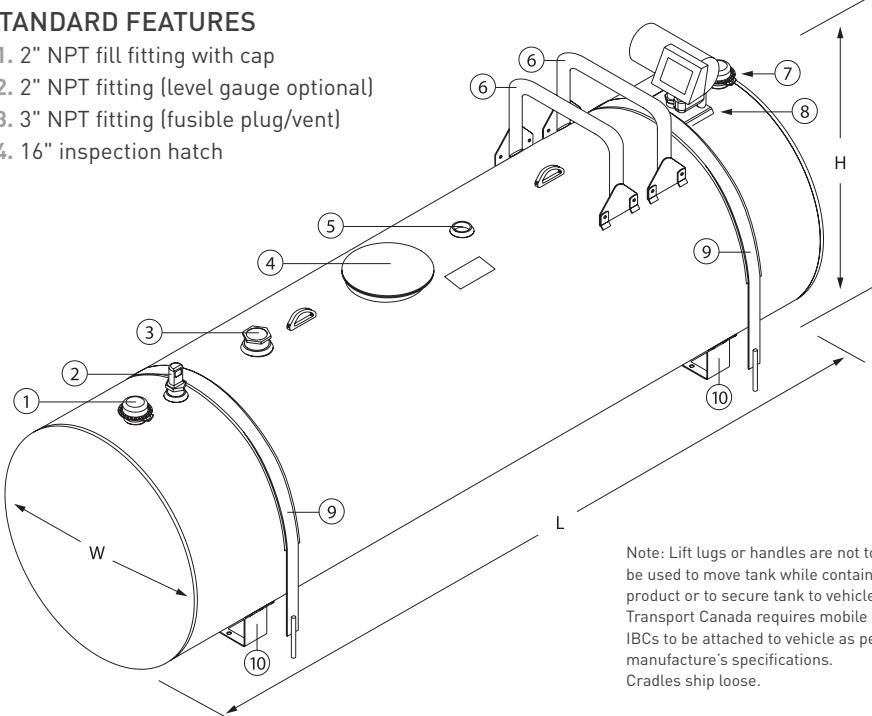

Note: Lift lugs or handles are not to be used to move tank while containing product or to secure tank to vehicle. Transport Canada requires mobile IBCs to be attached to vehicle as per manufacturer's specifications. Cradles ship loose.