




## FML/EX

Mulcher with swinging hammers rotor for excavators having a weight between 14 and 20 t.

**Standard equipment:** 63 cc hydraulic piston motor, with anticavitation valve, flow control system valve, hydraulic hood.

**Options:** custom made attachment plate with pins, diverter valve.

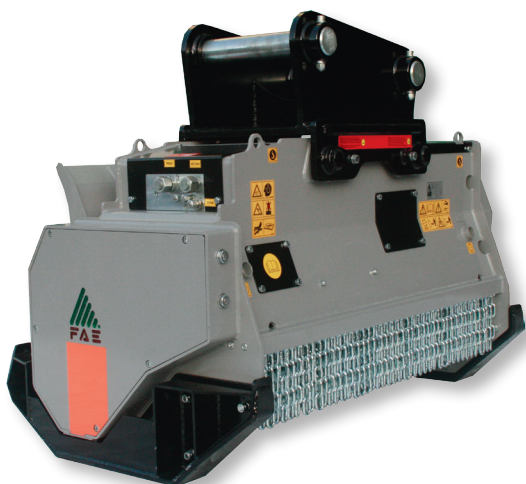

## FML/EX

Model	Power HP	Requirements		Excavator weight t.	Working width Inches	Weight lbs	Grinding diameter Inches (max)	Hammers q.ty/type FMM
	Min - Max	Flow gal/min Min - Max	Pressure Bar Min - Max					
FML/EX 100	90 - 100	30 - 40	220 - 350	14 - 20	43	2094	8	16
FML/EX 125	90 - 100	30 - 40	220 - 350	14 - 20	53	2315	8	20
FML/EX 150	100 - 120	30 - 40	220 - 350	14 - 20	62	2535	8	24

Data refers to the machine without options.



Hammer type FMM