


HHT35SL



- 35 cc Honda GX35 OHC Mini 4-stroke engine
- Flex shaft for increased durability and superior shock absorption
- Loop-style handlebar
- Semi-matic line feed (tap and go) standard with "Quiet Line"
- Trimming thick weeds and grasses

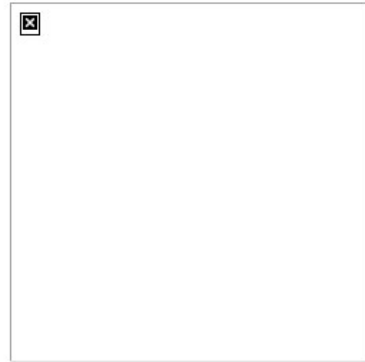

SPECIFICATIONS

ENGINE TYPE	MINI 4-STROKE; OHC; SINGLE CYLINDER AIR COOLED MULTI-POSITION (360°)	HANDLE TYPE	LOOP
Honda ENGINE MODEL	GX35	THROTTLE CONTROL TYPE	TWO-MOTION TRIGGER TYPE
DISPLACEMENT	35.8 CC (2.18 CID)	ENGINE STOP SWITCH	SLIDE TYPE SWITCH
BORE AND STROKE	39 X 30 MM (1.5 X 1.2 IN)	CUTTING HEAD (STANDARD)	SEMI-MATIC LINE FEED NYLON (TAP & GO)
MAXIMUM NET TORQUE	1.6 N•M (1.20 LBF-FT) @ 5,500 RPM	CUTTING HEAD (OPTIONAL)	MANUAL; PRO-TAP
IDLE SPEED	3,100 ± 200 RPM	CUTTING WIDTH	43.2 CM (17.0 IN)
MAX. NO-LOAD RPM¥¥ (REQUIRES BLADE BARRIER)	10,000 RPM	LINE TYPE	ULTRA-QUIET
IGNITION SYSTEM	TRANSISTORIZED FLYWHEEL MAGNETO (ELECTRONIC)	CUTTING LINE DIAMETER	2.41 MM (0.095 IN) OR 2.67 MM (0.105 IN)
SPARK PLUG	CMR5H (NGK)	ANTI-VIBRATION SYSTEM	STANDARD
COOLING SYSTEM	FORCED AIR	DRIVE SHAFT TYPE	FLEXIBLE STEEL CABLE
STARTING SYSTEM	RECOIL STARTER	FINAL DRIVE GEAR CASE	HELICAL CUT BEVEL GEARS / SEALED BALL BEARINGS
STOPPING SYSTEM	IGNITION PRIMARY CIRCUIT GROUND	GEAR RATIO	1.235 INPUT SHAFT: 1 (OUTPUT SHAFT)
CARBURETOR	DIAPHRAGM TYPE W/FUEL PUMP	MAIN PIPE DIAMETER	25.4 MM (1.0 IN)
RECOMMENDED FUEL	REGULAR UNLEADED GASOLINE (87 OCTANE)	MAIN PIPE THICKNESS / MATERIAL	1.5 MM (.06 IN) / ALUMINUM
FUEL PRIMER	ANTI-FLOOD TYPE	TRIMMER GUARD WITH CUTTER	STANDARD
FUEL CAPACITY	0.65 LITRE (22.9 FL. IMP. OZ)	STEEL BLADE GUARD	OPTIONAL
FUEL CONSUMPTION (APPROXIMATE)***	0.7 LITRE/HR (0.15 IMP. GAL/HR)	SHOULDER HARNESS	STANDARD
CLUTCH DRIVE TYPE	CENTRIFUGAL TWIN SHOE-CLUTCH	PROFESSIONAL DOUBLE LOOP HARNESS	OPTIONAL†
CLUTCH SIZE	78 MM (3 1/16 IN) DIAMETER	SAFETY GOGGLES (A.N.S.I STD.)	STANDARD
CLUTCH ENGAGEMENT	4,200 ± 200 RPM	BLADE	OPT. (50-T X 25.4 CM / 10.0 IN) STEEL BRUSH CUTTING ††
AIR CLEANER	SEMI-DRY TYPE	BLADE BARRIER KIT¥	OPTIONAL‡
LUBRICATION SYSTEM	OIL MIST	OVERALL LENGTH WITH CUTTER MOUNTED	187.5 CM (73.8 IN)
OIL CAPACITY	100 CC (3.52 FL. IMP. OZ)	OVERALL WIDTH	32.5 CM (12.8 IN)
RECOMMENDED OIL	SAE 10W30 API SERVICE CLASSIFICATION SJ OR LATER	OVERALL HEIGHT	25.9 CM (10.2 IN)
		DRY WEIGHT WITHOUT BLADES	6.71 KG (14.8 LB)

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

©/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.