

**WESTFIELD** 







WCX 20105



WCX 1535 TD



WCX 1545 FL FMD

## BELT CONVEYORS

- Weather guards are standard on all conveyors
- Maximum service height at 30-degrees
- All belts are made of 2-ply Chevron, with nylon slider back
- Plastic hood and collapsible canvas hoppers provides cushioning for fragile materials

### WCX 1590

- Capacity rated up to 6,000 bu/hr
- Available in 90' length
- 10" diameter, 14-gauge tube with a 15" belt
  - 12-gauge tube for the first 30'
- Pinch S-Drive PTO (Side)

#### FEATURES

- Hydraulic scissor lift frame
- Cable trussing
- Extendable axles

### WCX 1535

- Capacity rated up to 6,000 bu/hr
- Available in 35' length
- 10" diameter, 14-gauge tube with a 15" belt
- Top Drive (Hydraulic or Electric)

#### FEATURES

- A-frame undercarriage

### WCX 20105

- Capacity rated up to 9,000 bu/hr
- Available in 105' length
- 14" diameter, 12-gauge tube with a 20" belt
- Pinch S-Drive PTO (Side)

#### FEATURES

- Triple cylinder hydraulic scissor lift frame
- Steel trussing

## FIELD LOADERS

Westfield Field Loaders include all the benefits of the standard hopper Belt Conveyors but feature an extended low-profile hopper, with unique collapsible design. The WCX 1500 Field Loaders have a 10" diameter, 14-gauge tube, 15" belt and capacity up to 6,000 bu/hr.


WCX Field Loaders come in 35' and 45' with a Pinch Top Drive (Hydraulic or Electric).

The WCX 1545 is also available in Pinch S-Drive (Gas) and Heavy-Duty mover kit.



WCX 1545 FL TD

Westfield has been your number one auger choice for over 65 years. We are pleased to provide you with yet another solution for your farm operation - the WCX line of Belt Conveyors, ideal for all of your gentle handling needs.

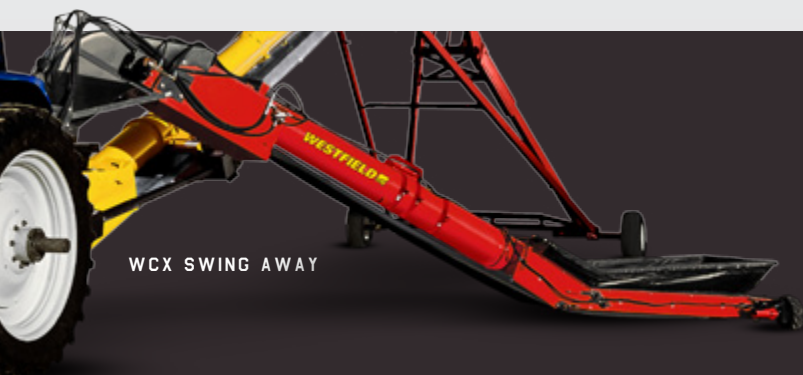

WCX SWING AWAY

## SWING AWAY WCX 1590 | WCX 20105

A Swing Away configuration is available for the 1590 and 20105 WCX conveyors, featuring a low-profile transfer conveyor with collapsible hopper.

- Center mounted CV PTO shaft with gearbox drive system
- Standard with hydraulic winch
- Available in Hydraulic or 12V Electric Remote Power Swing
- Hydraulic requires approximately 12 GPM on 1500 series, 18 GPM on 2000

## LOW PROFILE TRANSFER

- 7 1/2" hopper clearance; 9" clearance at transition
- Discharge height - 28"
- 30" x 75" collapsible hopper
- Hydraulic, electric or gas drive options



WCX 1515LP




## WCX SPECIFICATIONS

MODEL	BELT LENGTH	WEIGHT (LBS)	UP-OPERATION		DOWN-OPERATION		WIDTH	HP PTO	HP ELEC	HP GAS	HP HYD. (Cu.in)
			A	B	A	B					
WCX 1535 Conveyor TD	70' 10"	1582	16.8'	12'	10.7'	12.8'	7.5'	—	7.5 HP	—	6.2 (2000 SERIES)
WCX 1590 Conveyor	185'	3850	44.2'	39.5'	14.9'	46.7'	11.3'	50 HP	—	—	—
WCX 1590 Swing Transfer	34' 6"	700	—	—	—	—	—	—	—	—	5.9 (H SERIES)
WCX 20105 Conveyor	217' 10"	7990	51.1'	—	15.9'	—	*13.92'	80 HP	—	—	—
WCX 20105 Swing Transfer	41' 6"	900	—	—	—	—	—	—	—	—	6.2 (2000 SERIES)
WCX 1535 Field Loader TD Electric	83' 1"	1660	17'	15.4'	11.3'	16.6'	7.5'	—	10 HP	—	6.2 (2000 SERIES)
WCX 1535 Field Loader TD Hydraulic	83' 1"	1660	16.75'	16.8'	11.3'	14.7'	7.5'	—	10 HP	—	6.2 (2000 SERIES)
WCX 1545 Field Loader TD Electric	103' 1"	1966	22.3'	21'	13.2'	21.4'	7.5'	—	15 HP	—	6.2 (2000 SERIES)
WCX1545 Field Loader TD Hydraulic	103' 1"	1966	19.75'	23'	13.2'	24.25'	7.5'	—	15 HP	—	6.2 (2000 SERIES)
WCX 1545 Field Loader FMD	107' 2"	2305	20.8'	21.6'	12.4'	22.1'	7.5'	—	20 HP	32 HP	—
WCX 1515 Low Profile Transfer	30' 8"	642	—	—	2.8'	6.2'	3.8'	—	5 HP	9 HP	5.9 (H SERIES)
WCX 1800 Pit Stop	47'	2970	—	—	2.8'	4.5'	7.9'	—	7.5 HP	—	6.2 (2000 SERIES)


\*Axles extend to 16.63'

"A" up-operation is conveyor discharge height (from bottom of discharge hood) at 30 degrees.  
 "A" down-operation is overall conveyor height (from top of discharge hood)



## PITSTOP

- Quick, convenient unloading
- Gentle handling and fast setup
- Low, 7 1/2" clearance
- 8" x 12" easy access dump platform
- Large, 32" x 114" hopper
- Hydraulic lift on transport wheels
- Discharge height – 28"
- Overall length – 25'
- Hydraulic, gas or electric drive options
- Optional self-propelled kit available

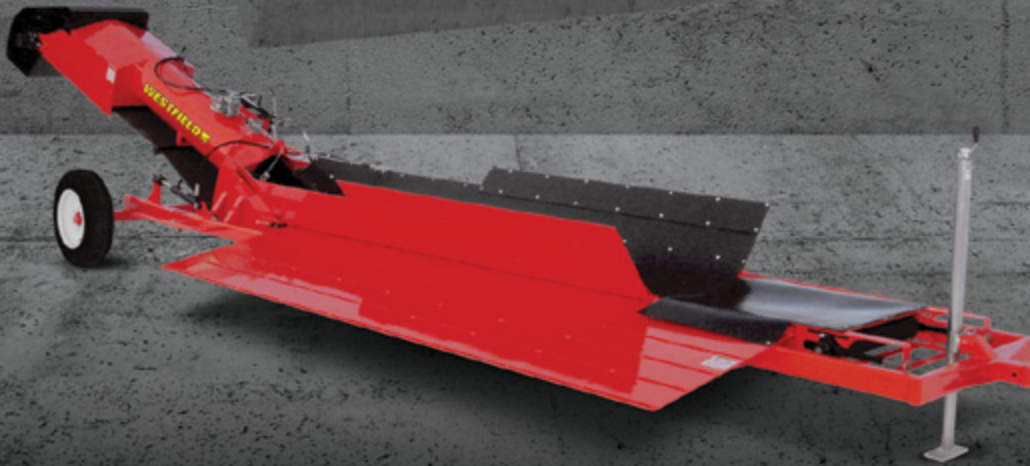

WCX 1800PS

# WESTFIELD

Box 39, 74 Main Street Rosenort, Manitoba, Canada R0G 1W0  
 866.467.7207 | sales@grainaugers.com | grainaugers.com

**AGI**  
 AG GROWTH INTERNATIONAL