


WX10



- Honda GX25 OHC Mini four-stroke engine
- 25.4 mm (1") suction and discharge ports
- Pumps 140 litres per minute (31 Imp. Gal per minute)
- Pool maintenance, filling cottage water tanks or small-drainage jobs

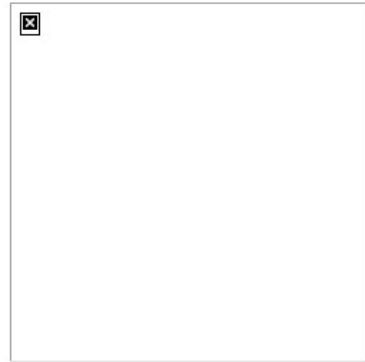

SPECIFICATIONS

WATER PUMP TYPE	TRANSFER	Honda ENGINE	GX25 MINI 4-STROKE
PUMP	CENTRIFUGAL	TYPE	OHC; AIR-COOLED; SINGLE CYL.
TYPE	SELF-PRIMING	DISPLACEMENT	25 CC
SUCTION PORT DIAMETER	25.4 MM /1.0 IN.	LUBRICATION SYSTEM	CONTROLLED OIL MIST
DISCHARGE PORT DIAMETER	25.4 MM /1.0 IN.	GOVERNOR	MECHANICAL
LITRES PER MINUTE	140	STARTING SYSTEM	RECOIL
IMP. GAL. PER MINUTE	31	FUEL TANK CAPACITY	0.55 L /0.12 IMP. GAL.
LITRES PER HOUR	8400	OIL ALERT	N/A
IMP. GAL. PER HOUR	1860	DRIVE UNIT TYPE	DIRECT COUPLE / MECH. SEAL
TOTAL HEAD	36 M /118 FT.	FRAME TYPE	HANDLE TYPE; STEEL BASE
SUCTION HEAD (TOTAL LIFT)	8 M /26 FT.	LENGTH	325 MM /12.8 IN.
PRIMING TIME @ 5M(16.4 FT.)	80 SECONDS	WIDTH	221 MM /8.7 IN.
PUMP BODY	ALUMINUM	HEIGHT	300 MM /11.8 IN.
IMPELLER	ALUMINUM	DRY WEIGHT	6.1 KG. /13.4 LB.

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

®/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.