


WX15



- Honda GXH50 four-stroke OHV engine
- 38 mm (1.5") suction and discharge ports
- Pumps 240 litres per minute (53 Imp. Gal. per minute)
- Oil Alert™ is standard
- Pool maintenance, filling cottage water tanks or small-drainage jobs

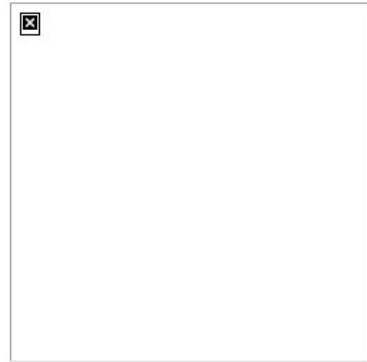

SPECIFICATIONS

WATER PUMP TYPE	TRANSFER	Honda ENGINE	GXH50 4-STROKE
PUMP	CENTRIFUGAL	TYPE	OHV; AIR-COOLED; SINGLE CYL.
TYPE	SELF-PRIMING	DISPLACEMENT	49 CC
SUCTION PORT DIAMETER	38 MM /1.5 IN.	LUBRICATION SYSTEM	SPLASH TYPE
DISCHARGE PORT DIAMETER	38 MM /1.5 IN.	GOVERNOR	MECHANICAL
LITRES PER MINUTE	240	STARTING SYSTEM	RECOIL
IMP. GAL. PER MINUTE	53	FUEL TANK CAPACITY	1.2 L /0.26 IMP. GAL.
LITRES PER HOUR	14400	OIL ALERT	STANDARD
IMP. GAL. PER HOUR	3180	DRIVE UNIT TYPE	DIRECT COUPLE / MECH. SEAL
TOTAL HEAD	40 M /130 FT.	FRAME TYPE	HANDLE TYPE; STEEL BASE
SUCTION HEAD (TOTAL LIFT)	8 M /26 FT.	LENGTH	325 MM /12.8 IN.
PRIMING TIME @ 5M(16.4 FT.)	110 SECONDS	WIDTH	275 MM /10.8 IN.
PUMP BODY	ALUMINUM	HEIGHT	375 MM /14.8 IN.
IMPELLER	ALUMINUM	DRY WEIGHT	9 KG. /20 LB.

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

®/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.