





300S

Forestry tiller for special built hydraulic Prime Movers with power range between 250 and 400 HP.

Standard equipment: dual type transmission, hydraulic rear hood, hydraulic motors with variable torque.

Options: customized attachment plate, option of rotor equipped with tooth type A/HD or type "F".

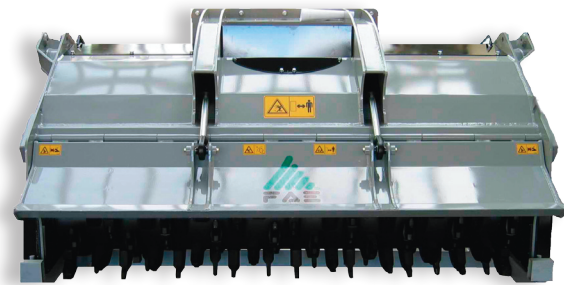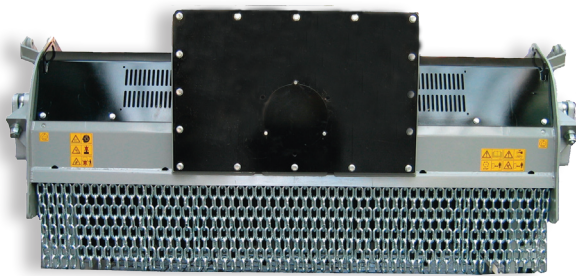

300S

Model	Power HP	Requirements	Working width	Overall width	Weight	Working depth	Grinding diameter	Teeth q.ty	
	Min - Max	Flow gal/min Min - Max							Pressure PSI Min - Max
300/S - 225	250 - 400	100 - 150	5000	91	102	7830	16	20	88+4
300/S - 250	280 - 400	100 - 150	5000	101	112	8380	16	20	102+4

Data refers to the machine without options. Technical data for models with mechanical transmission upon request.



Tooth type A (standard)



Tooth type A/HD (option)



Tooth type F (option)



Side scraper Type MH