



STATIONARY MIXERS MAJOR COMPONENT



10 hp Drive Motor

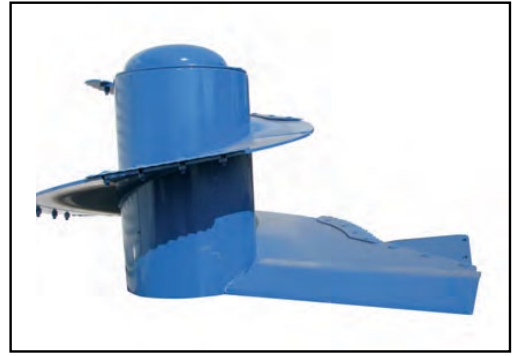

Fast-Gentle Mixing Auger

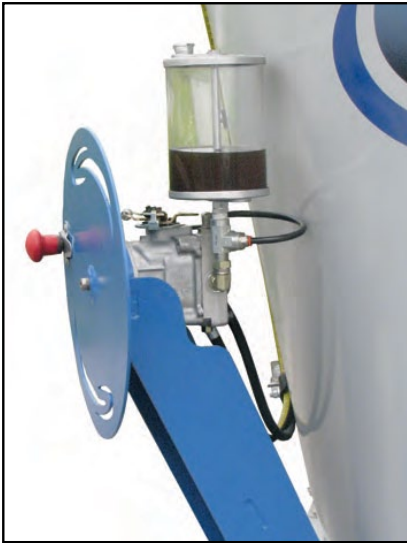

Manual Hydraulic Door Opener



Variable Frequency Drive
1-60 rpm Auger Speed



Hydraulic Power Pack



2-Speed Shifter

STATIONARY MIXERS

Penta Stationary Vertical Mixers are compact and convenient machines with a high capacity and low power consumption. Stationary Mixers offer the possibility to use the more economical feed boxes with less horse power to distribute the feed. The mixers run at a reduced constant Rpm as opposed to mobile mixers, and full clean out can be arranged through a variable drive and gearbox. All mixers are built on a subframe and supports can be ordered to put the machine at the desired height. The machine operated by a frequency changer which makes sure that the machine starts slowly and without any increase in power. The frequency changer also enables acceleration as required.

| | 2020VS | 3020VS | 4420VS |
|---|-----------|-----------|-----------|
| Capacity Top of Steel | 212 cu/ft | 296 cu/ft | 394 cu/ft |
| Height (Top of Steel) | 77" | 80" | 73" |
| Width | 102" | 90" | 86" |
| OA Length | 98" | 110" | 194" |
| Auger Thickness (Optional 1/2") | 3/8" | 3/8" | 3/8" |
| Floor Thickness | 1/2" | 1/2" | 1/2" |
| 2 Speed Gearbox | Std. | Std. | Std. |
| Max LBS of Feed in Mixer | 4240 LBS | 5920 LBS | 8000 LBS |
| Magnets | Opt. | Opt. | Opt. |
| Sidewalls | 3/16" | 3/16" | 3/16" |
| Weight Empty | N/A | N/A | N/A |
| Movable Door | Y | N | N |
| 300 °Door Placement | Y | N | N |
| Manual Hydraulic Door Opener | Y | N | N |
| Variable Frequency Drive 1-60 rpm Auger | 10 HP | 2 X 10 HP | 2 X 10 HP |
| Hydraulic Power Pack | Y | Y | Y |
| 2-Speed Shifter | Y | Y | Y |
| Auger Flight 1/2" Upgrade | Opt. | Opt. | Opt. |

PENTA 2020 VS STATIONARY



PENTA 3020 VS STATIONARY



PENTA 4020 VS STATIONARY

