

HT SERIES  
**HAY TEDDER**



**HT210**




**HT417H**

For the fastest drying time, choose Bush Hog®'s tedders. We offer a choice of three different models, each built to accommodate your needs. Our tedders are designed for low horsepower tractors, with working widths from 10 to over <sup>25</sup>~~17~~-feet. The Bush Hog® tedder produces quicker drying time for baling sooner and reduces possible damage to ground plants.

**Built To Last.**

## Bush Hog® Tough Features

- 🐾 **TOUGH Bush Hog® Hay Tedder** for faster hay drying time.
- 🐾 **TOUGH Three Models** to choose from.
- 🐾 **TOUGH Fluffing and Spreading Cut** hay increases air flow through the crop and results in faster drying times.
- 🐾 **TOUGH Six Spring Steel Tines Per Rotor** fluff and spread the hay.
- 🐾 **TOUGH Slipclutch** is standard to protect the 540 PTO driveline.
- 🐾 **TOUGH Bush Hog® Tedders** were designed for low horsepower tractors.
- 🐾 **TOUGH Tine Height** can be adjusted manually <sup>f (small "f")</sup> for proper performance.

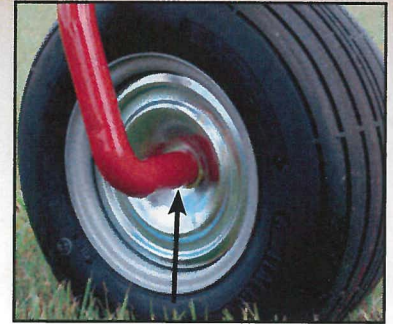

Anti-Wrap Stationary Disc



Clutch Protection

HT625H  
HT419H

SPECIFICATION			
MODEL	HT210	HT417	HT417H
Number of Rotors	2	4	4
Working Width (Approx.)	10-feet	17-feet 1-inch	17-feet 1-inch
Number of Tines	12	24	24
Transport Width	10-feet	10-feet	10-feet
Working Speed (MPH)	5-10	5-10	5-10
Horsepower Required (min)	15 HP	22 HP	22 HP
PTO (RPM)	540	540	540
Folding (man. or hyd.)	N/A	Manual	Hydraulic
Tire Size	16x6.50-8	<del>15 x 6.00-6</del>	
Weight	385-lbs.	830-lbs.	850-lbs.

Add

NUMBER OF TIRES

[www.bushhog.com](http://www.bushhog.com)

OPTIONS

HYDRAULIC TILT KIT



Contact Rhino Field Sales Manager for Discount Terms. Product price is F.O.B. factory. This product is not eligible for Free Freight.

# TEDDERS

HT419H



HT625H

## STD EQUIPMENT & SPECIFICATIONS

Model:	PT207	PT405	PT405H	<del>PT419H</del>	<del>PT625H</del>
<b>Working Width:</b>	10'	17'-1"	17'-1"	19'	25'-7"
<b>Approx. Transport Width:</b>	10'	10'	10'	11'	9'-6"
<b>Working Speed:</b>	5 - 10 MPH	5 - 10 MPH	5 - 10 MPH	5 - 10 MPH	5 - 10 MPH
<b>Min Horsepower Required:</b>	15	22	22	25	50
<b>Number of Rotors:</b>	2	4	4	4	6
<b>Number of Arms:</b>	12	24	24	24	36
<b>Number of Double Tines:</b>	12	24	24	24	36
<b>Tire Size:</b>	16x6.50-8	16x6.50-8	16x6.50-8	16x6.50-8	16x6.50-8 (WorkingTires) 205/70/15 (Transport Tires)
<b>Number of Tires:</b>	2	4	4	4	8 (WorkingTires) 2 (Transport Tires)
<b>Fold:</b>	N/A	Manual	Hydraulic	Hydraulic	Hydraulic
<b>PTO Type:</b>	540 RPM	540 RPM	540 RPM	540 RPM	540 RPM
<b>Drive Protection:</b>	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch
<b>Weight (Approx.):</b>	385 lbs	830 lbs	850 lbs	1225 lbs	2470 lbs

## ORDERING SECTION