


UPR820 - Driller

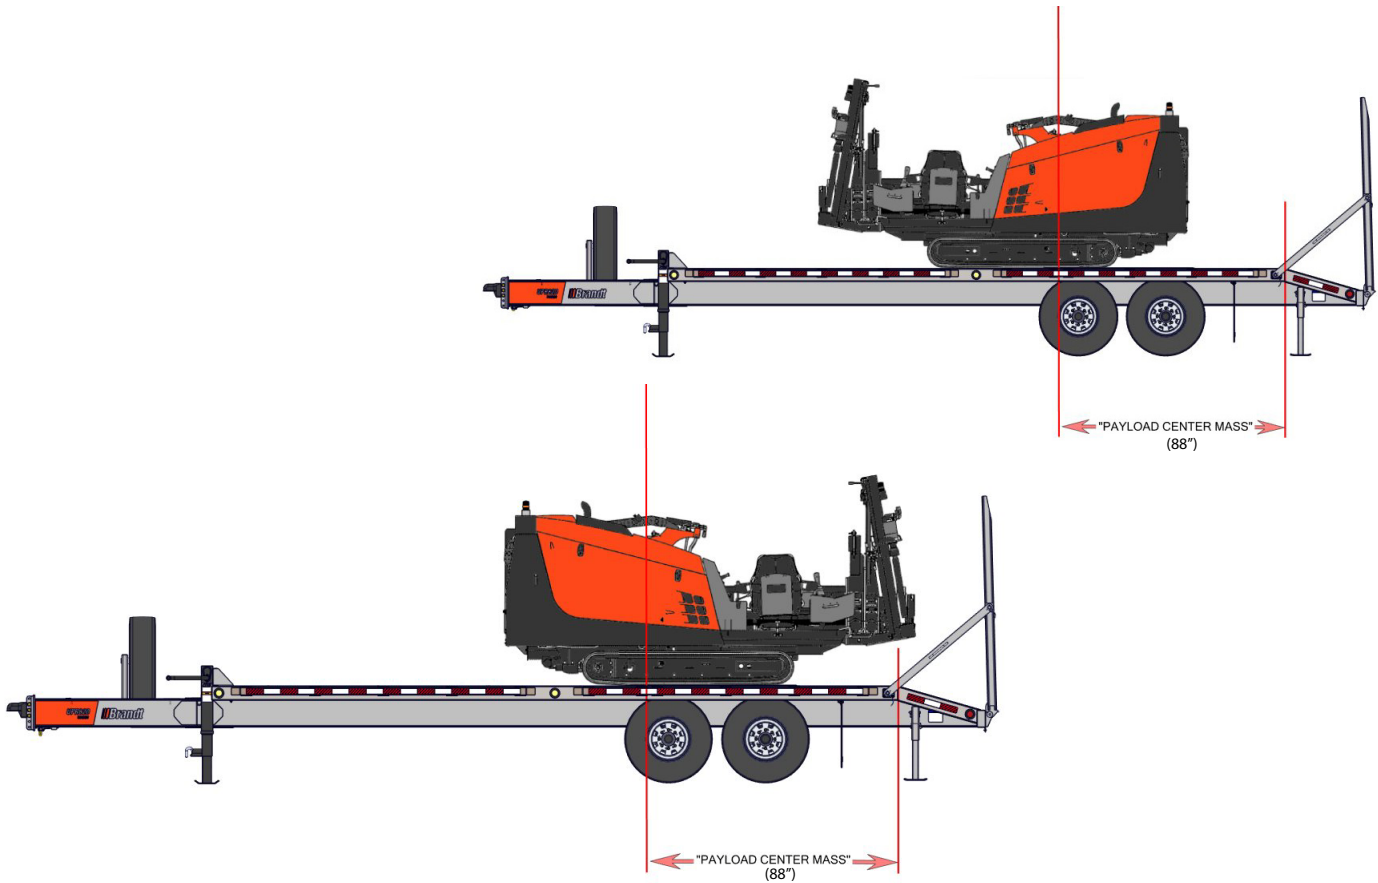

Loading Guidelines

When additional load is carried 30" from the front of the deck, adjust the location of the equipment backward according to the chart below.

Load on Deck (lbs)	Move Equipment by: (inches)
500	5
1000	11
1500	18
2000	25
2500	32

UPR820

GVWR:	16000 lbs
Tare:	4300 lbs
Payload Capacity	11700 lbs
Payload Center Dimension	88" From Back of Deck

DISCLAIMER: THIS DOCUMENT PROVIDES LOADING GUIDANCE TO ACHIEVE A PROPER DISTRIBUTION OF THE WEIGHT ON THE TRAILER. IT IS THE RESPONSIBILITY OF THE OPERATOR TO ENSURE THAT THE GVWR AND GAWR OF THE TRAILER, THE TOWING VEHICLE, AND THE COMBINATION OF VEHICLES IS NOT EXCEEDED.

The Brandt logo features three slanted orange bars to the left of the word "Brandt" in a large, bold, white sans-serif font.