


# UPR820 - Excavator

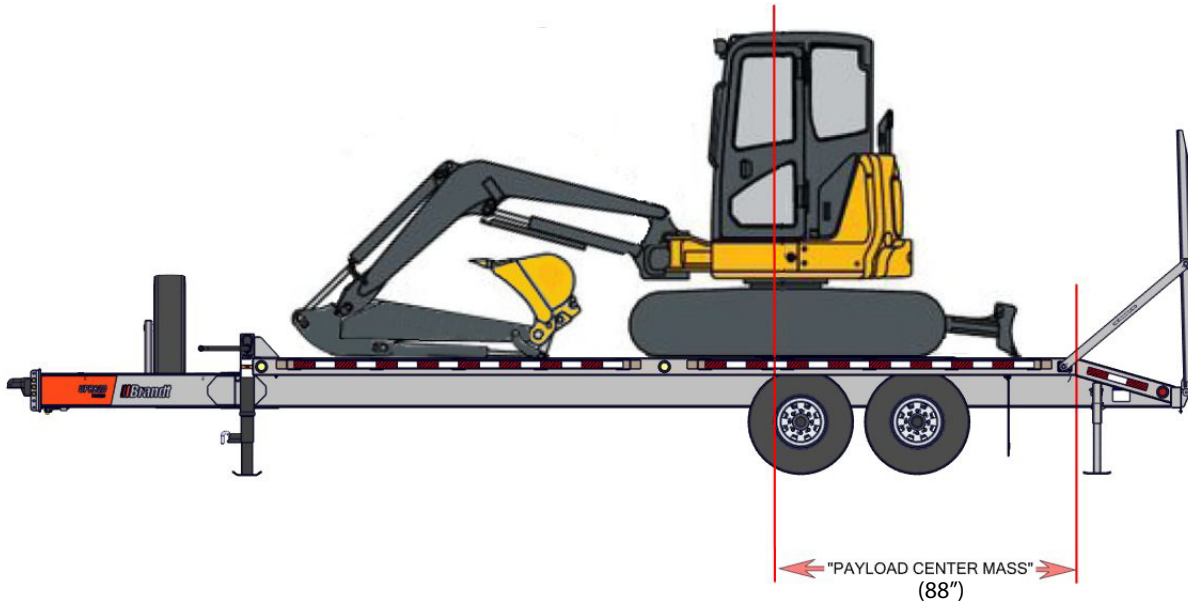

## Loading Guidelines

When additional load is carried 30" from the front of the deck, adjust the location of the equipment backward according to the chart below.

Load on Deck (lbs)	Move Equipment by: (inches)
500	5
1000	11
1500	18
2000	25
2500	32

## UPR820

<b>GVWR:</b>	16000 lbs
<b>Tare:</b>	4300 lbs
<b>Payload Capacity</b>	11700 lbs
<b>Payload Center Dimension</b>	88" From Back of Deck

**DISCLAIMER: THIS DOCUMENT PROVIDES LOADING GUIDANCE TO ACHIEVE A PROPER DISTRIBUTION OF THE WEIGHT ON THE TRAILER. IT IS THE RESPONSIBILITY OF THE OPERATOR TO ENSURE THAT THE GVWR AND GAWR OF THE TRAILER, THE TOWING VEHICLE, AND THE COMBINATION OF VEHICLES IS NOT EXCEEDED.**