


UBT620 - Excavator

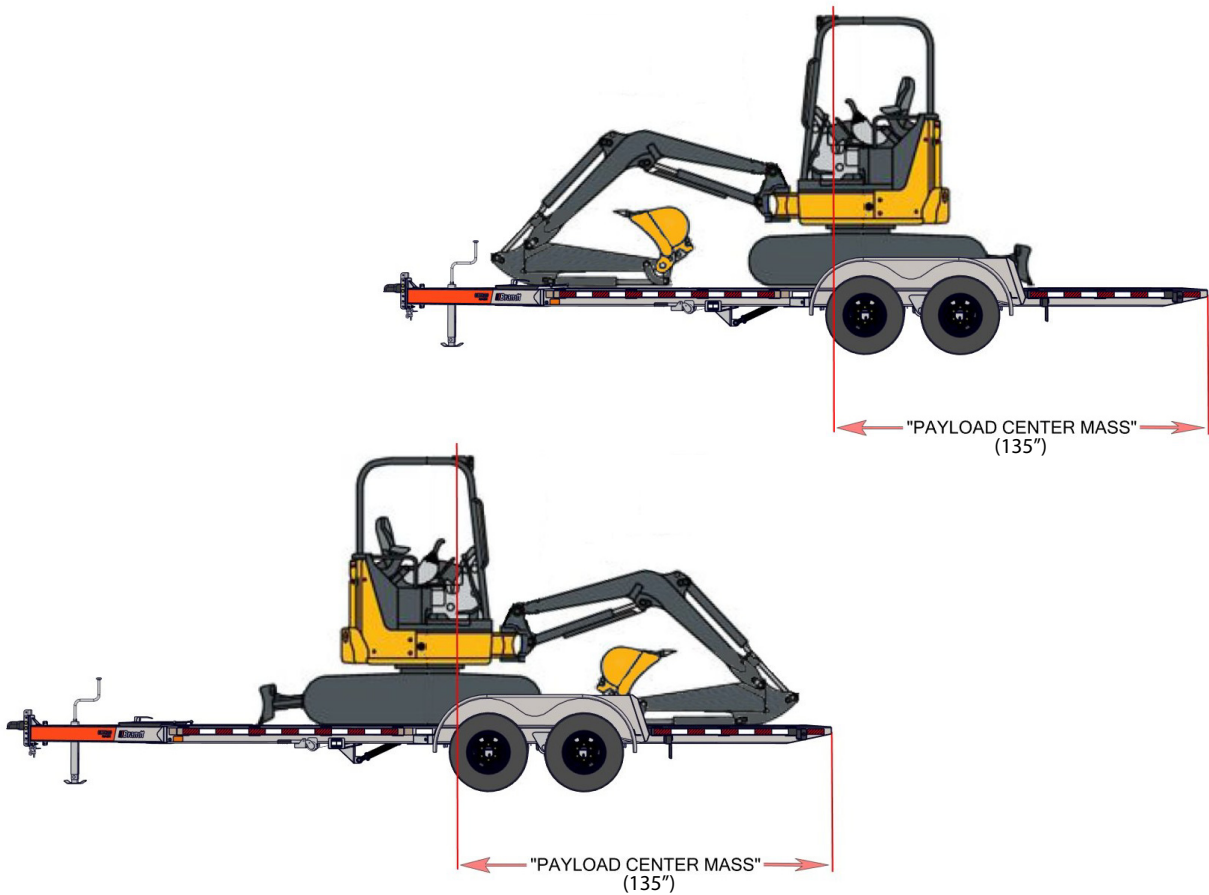

Loading Guidelines

Load Equipment until deck tilts forward, then pull ahead according to chart below based on the weight of the load on the fixed deck.

Load on Fixed Deck (lbs)	Move Equipment by: (inches)
No Load	20
500	15
1000	9
1500	3

UBT620

GVWR:	12000 lbs
Tare:	3000lbs
Payload Capacity	9000 lbs
Payload Center Dimension	135" From Back of Deck

DISCLAIMER: THIS DOCUMENT PROVIDES LOADING GUIDANCE TO ACHIEVE A PROPER DISTRIBUTION OF THE WEIGHT ON THE TRAILER. IT IS THE RESPONSIBILITY OF THE OPERATOR TO ENSURE THAT THE GVWR AND GAWR OF THE TRAILER, THE TOWING VEHICLE, AND THE COMBINATION OF VEHICLES IS NOT EXCEEDED.