


# UGR820 - Driller

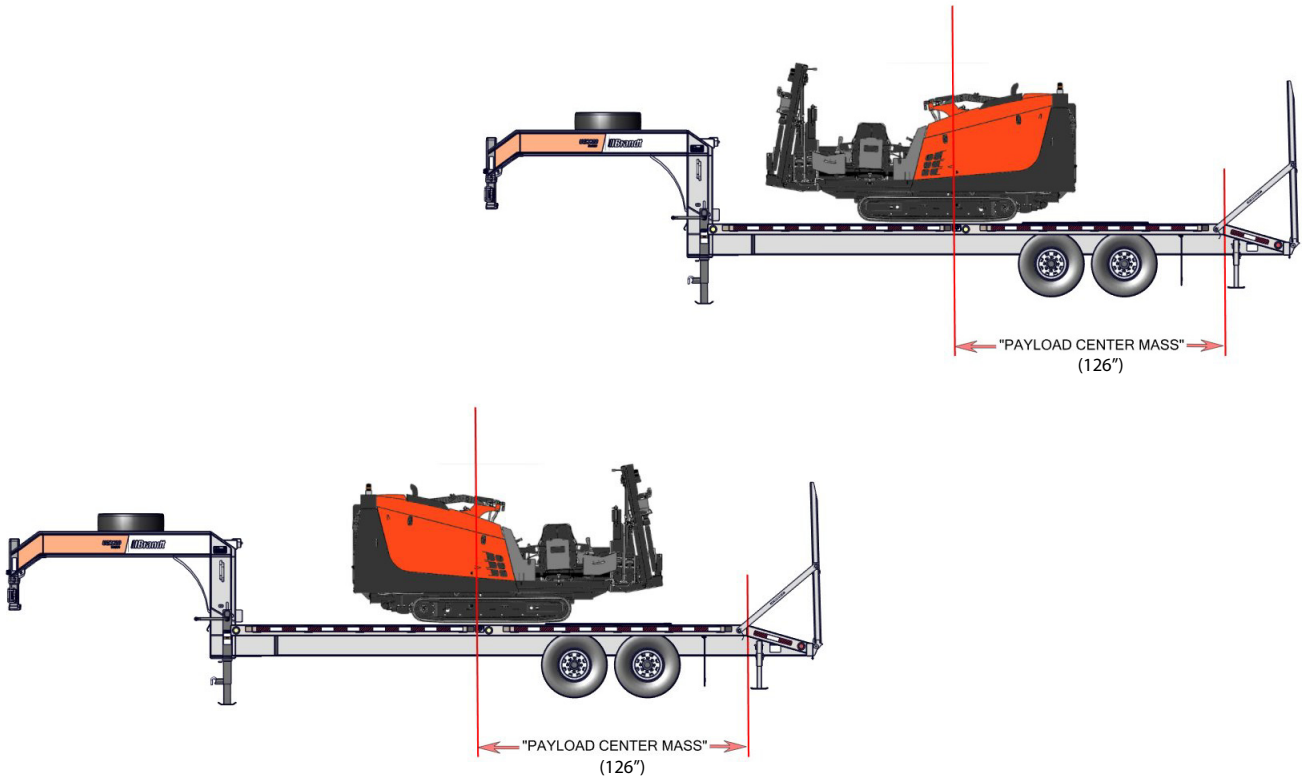

## Loading Guidelines

When additional load is carried 30" behind Gooseneck, adjust the location of the equipment backward according to the chart below.

Load on Deck (lbs)	Move Equipment by: (inches)
500	4
1000	8
1500	12
2000	17
2500	23

## UGR820

<b>GVWR:</b>	16800 lbs
<b>Tare:</b>	4850 lbs
<b>Payload Capacity</b>	11950 lbs
<b>Payload Center Dimension</b>	126" From Back of Deck

**DISCLAIMER: THIS DOCUMENT PROVIDES LOADING GUIDANCE TO ACHIEVE A PROPER DISTRIBUTION OF THE WEIGHT ON THE TRAILER. IT IS THE RESPONSIBILITY OF THE OPERATOR TO ENSURE THAT THE GVWR AND GAWR OF THE TRAILER, THE TOWING VEHICLE, AND THE COMBINATION OF VEHICLES IS NOT EXCEEDED.**