


UGR820 - Track Loader

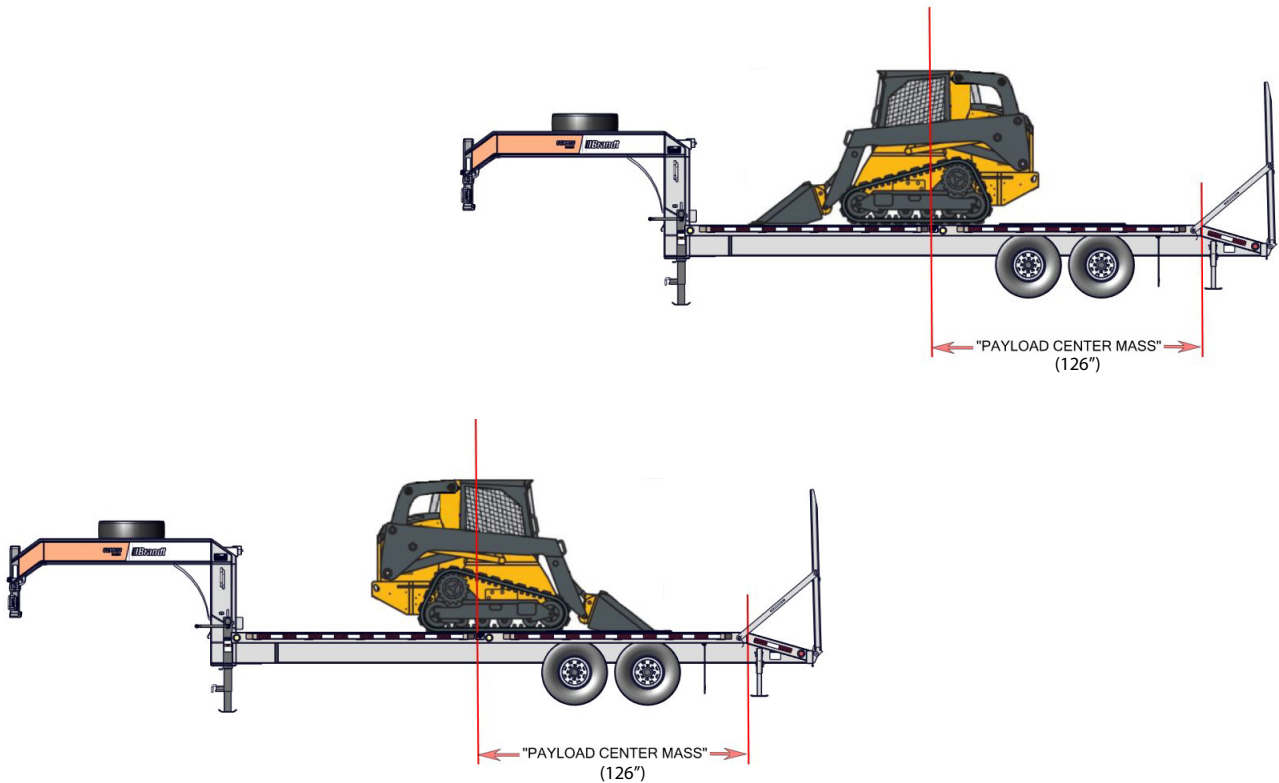

Loading Guidelines

When additional load is carried 30" behind Gooseneck, adjust the location of the equipment backward according to the chart below.

Load on Deck (lbs)	Move Equipment by: (inches)
500	4
1000	8
1500	12
2000	17
2500	23

UGR820	
GVWR:	16800 lbs
Tare:	4850 lbs
Payload Capacity	11950 lbs
Payload Center Dimension	126" From Back of Deck

DISCLAIMER: THIS DOCUMENT PROVIDES LOADING GUIDANCE TO ACHIEVE A PROPER DISTRIBUTION OF THE WEIGHT ON THE TRAILER. IT IS THE RESPONSIBILITY OF THE OPERATOR TO ENSURE THAT THE GVWR AND GAWR OF THE TRAILER, THE TOWING VEHICLE, AND THE COMBINATION OF VEHICLES IS NOT EXCEEDED.