


# UBD1116 - Excavator

\*Ensure to park at the very front of the box with the bucket down when hauling a machine forward facing.



\*Ensure to park at the very back of the box with the bucket down when hauling a machine rear facing.

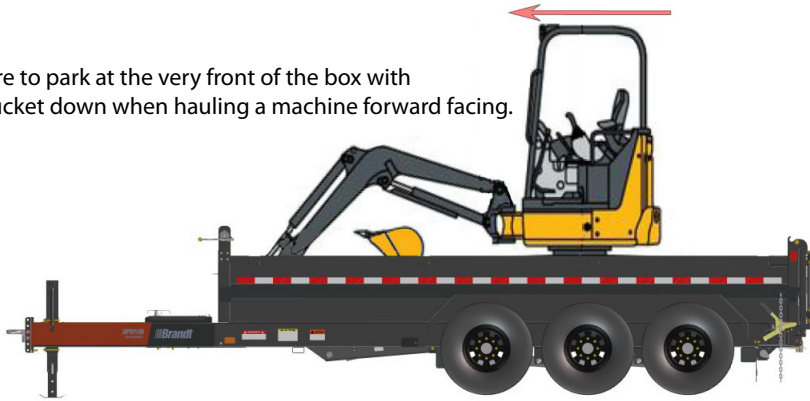

The following list details whether the specified size of Excavator will fit the trailer orientation.

Excavator Size	17	26
Forward Facing	Yes	Yes
Rear Facing	Yes	No

	UBD1116	UBD1116SW
Dump Box Style:	Max	Straight Wall
GVWR:	21,000 lbs	22,000 lbs
Tare:	6300 lbs	6400 lbs
Payload Capacity	15,700 lbs	15,600 lbs
Payload Center Dimension	100.35" From Front of Deck	100.35" From Front of Deck

**DISCLAIMER: THIS DOCUMENT PROVIDES LOADING GUIDANCE TO ACHIEVE A PROPER DISTRIBUTION OF THE WEIGHT ON THE TRAILER. IT IS THE RESPONSIBILITY OF THE OPERATOR TO ENSURE THAT THE GVWR AND GAWR OF THE TRAILER, THE TOWING VEHICLE, AND THE COMBINATION OF VEHICLES IS NOT EXCEEDED.**

The Brandt logo, featuring three orange diagonal bars to the left of the word "Brandt" in a bold, white, sans-serif font.