


Technical sheet :

MH 25 3B - FT4




	Technical characteristics		Metric	Imperial
1.1	Manufacturer		Manitou	Manitou
1.2	Model Name		MH 25 3B - FT4	MH 25 3B - FT4
1.3	Power source		Diesel	Diesel
1.4	Operator type		Seated	Seated
1.5	Max. capacity	Q	2500 kg	5512 lbs
1.6	Load centre of gravity	c	500 mm	19.685 in
1.8	Load distance, centre of drive axle to fork	x	625 mm	24.606 in
1.9	Wheelbase	y	1800 mm	70.866 in
	Weight			
2.1	Service Weight		4260 kg	9392 lbs
2.2	Weight on front axle (laden) / rear axle (laden)		5812 kg / 948 kg	12813 lbs / 2090 lbs
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		1750 kg / 2510 kg	3858 lbs / 5534 lbs
	Wheels			
3.1	Tyres type		Inflatable	Inflatable
3.2	Dimensions of front wheels		280/80 R20 XMCL27,10 - 12 IC 30 14PR	280/80 R20 XMCL27,10 - 12 IC 30 14PR
3.3	Dimensions of rear wheels		27,10 - 12 IC 30 14PR	27,10 - 12 IC 30 14PR
3.5	Number of front wheels / rear wheels		2 / 2	2 / 2
3.2	Number of drive wheels		4	4
3.6	Front wheel gauge	b10	1160 mm	45.669 in
3.7	Rear wheel gauge	b11	1164 mm	45.827 in
	Dimensions			
4.1	Tilt of Mast Forward (deg) / Backward (deg)	α / β	10 / 12	10 / 12
4.7	Height of overhead guard (cabin)	h6	2105 mm	82.874 in
4.7	Overall height of standard overhead guard	h6	2.105 m	6 ft 11 in
4.8	Seat height/stand height	h7	1025 mm	40.354 in
4.12	Height of towing bar (coupling height)	h10	310 mm	12.205 in
4.19	Overall length	l1	4045 mm	159.252 in
4.20	Length to face of forks	l2	2945 mm	115.945 in
4.21	Overall width	b1	1450 mm	57.087 in
4.22	Forks section / width / length	s / e / l	40 mm x 100 mm x 1100 mm	1.575 in x 3.937 in x 43.307 in
4.23	Fork carriage ISO 2328 (class/form) A/B		FEM 2A	FEM 2A
4.24	Fork carriage width	b3	1260 mm	49.606 in
4.31	Ground clearance below mast	m1	260 mm	10.236 in
4.32	Ground clearance at centre of wheelbase	m2	260 mm	10.236 in
4.33	Aisle width for 1000 x 1200 pallet widthways	Ast	5 m	16 ft 5 in
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast	5290 mm	208.268 in
4.35	Turning radius	Wa	3265 mm	128.543 in
4.36	Internal turning radius (over tyres)	b13	1.08 m	3 ft 7 in
	Performances			
5.1	Travel speed (laden / unladen)		14 km/h / 14 km/h	8.7 mph / 8.7 mph
5.2	Lifting speed (laden / unladen)		0.4 m/s / 0.5 m/s	1.31 ft/s / 1.64 ft/s
5.3	Lowering speed (laden / unladen)		0.5 m/s / 0.4 m/s	1.64 ft/s / 1.31 ft/s
5.5	Drawbar pull (Laden / Unladen)		3550 daN / 3550 daN	3550 daN / 3550 daN

	Performances			
5.7	Gradeability - laden / unladen		50 % / 48 %	50 % / 48 %
5.9	Service brake		Hydraulic	Hydraulic
	Engine			
6.4	Battery		0 V	0 V
7.1	Engine brand / model		Kubota / V2403 CR TE4	Kubota / V2403 CR TE4
7.2	Engine power according to ISO 1585		48.6 kW	48.6 kW
7.3	Rated speed		2700 tr/min	2700 tr/min
7.4	Number of cylinders / Capacity of cylinders		4 - 2434 cm³	4 - 148.53 in³
	Miscellaneous			
8.2	Working hydraulic pressure for attachments (bar)		170 Bar	12 PSI
8.3	Oil flow rate for attachments		77 l/min	77 l/min
8.4	Measured/guaranteed mean noise level at the ear of the operator		< 104 dB(A)	< 104 dB(A)

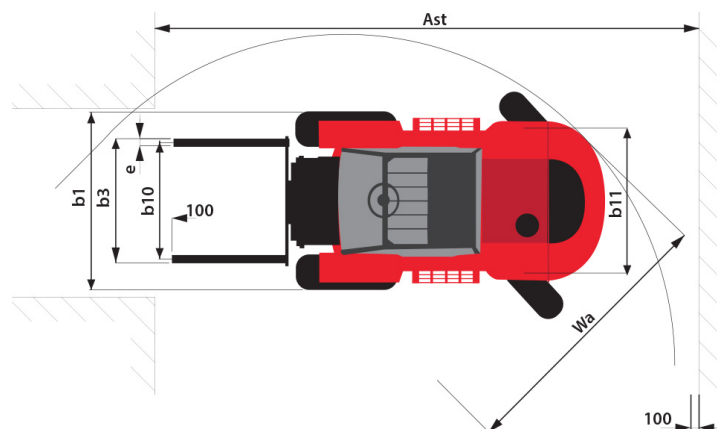

Characteristics of masts and residual capacities

Free Lift Triplex		FLT 37	FLT 40	FLT 43	FLT 47	FLT 50	FLT 55	FLT 60	FLT 65	FLT 70
h2 - Free lift	mm	1221	1321	1421	1571	1671	1831	2021	2271	2521
h1 - Height mast Lowered	mm	1945	2045	2145	2295	2395	2555	2745	2995	3245
h3 - Lifting Height	mm	3700	4000	4300	4700	5000	5500	6000	6500	7000
h4 - Height mast extended	mm	4469	4769	5069	5469	5769	6269	6769	7269	7769
α / β - Mast inclination (front / rear)	°	10 / 12	10 / 12	10 / 12	10 / 12	6 / 6	6 / 6	6 / 6	6 / 6	6 / 6
Residual capacity at max height	kg	1900	1550	1250	1000		700			
Residual capacity without attachment (Industrial load chart)	kg						700			

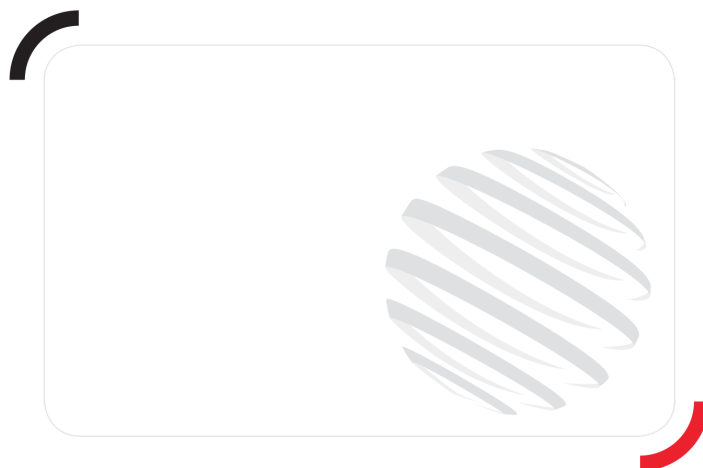

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes