

Technical sheet :

TMT 55 XT




	Technical characteristics		Metric	Imperial
1.1	Manufacturer		Manitou	Manitou
1.2	Model Name		TMT 55 XT	TMT 55 XT
1.2.1	Reach out equipment		Telescopic boom	Telescopic boom
1.3	Power source		Diesel	Diesel
1.4	Operator type		Seated	Seated
1.5	Max. capacity	Q	2500 kg	5512 lbs
	Weight			
2.1	Service Weight		2660 kg	5864 lbs
	Wheels			
3.2	Dimensions of front wheels		31 x 15,5 - 15"	31 x 15,5 - 15"
3.3	Dimensions of rear wheels		31 x 15,5 - 15"	31 x 15,5 - 15"
3.5	Number of front wheels / rear wheels		2 / 1	2 / 1
3.5.1	Drive wheels (front / rear)		2 / 1	2 / 1
	Dimensions			
4.4	Max. lifting height	h3	3430 mm	135.039 in
4.5	Height telescopic boom extended	h4	3915 mm	154,134 in
4.20	Length to face of forks	l2	2.85 m	9 ft 4 in
4.21	Overall width	b1	2.57 m	8 ft 5 in
4.22	Forks section / width / length	s / e / l	44 mm x 102 mm x 1219 mm	1.732 in x 4.016 in x 47.992 in
4.28	Max. Reach	l4	1310 mm	51.575 in
4.35	Turning radius	Wa	274 m	898 ft 11 in
	Performances			
5.1	Travel speed (laden)		11 km/h	6.8 mph
5.9	Service brake		Hydrostatic	Hydrostatic
5.11	Transmission type		Hydrostatic	Hydrostatic
	Engine			
7.1	Engine brand / norm		Kubota - Tier IV Final	Kubota - Tier IV Final
7.4	Capacity of cylinders		2434 cm³	148.53 in³
7.3	Rated speed		2700 tr/min	2700 tr/min
7.2	Engine power according to ISO 1585		37 kW	37 kW
	Miscellaneous			
8.2	Working hydraulic pressure for attachments (bar)		245 Bar	17 PSI
8.3	Oil flow rate for attachments		46 l/min	46 l/min


Dimensional drawing

Load chart


Machine on stabilizers with forks Metric

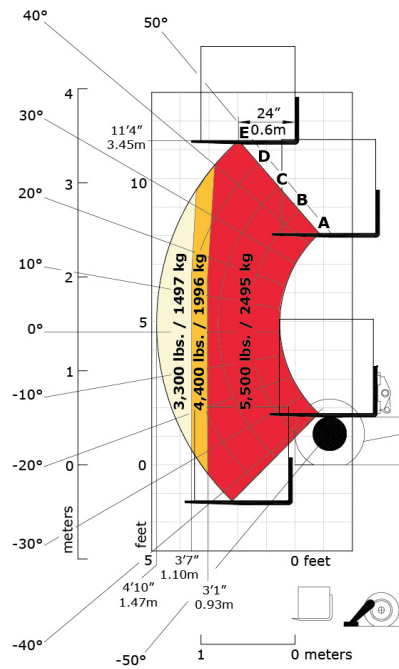


Machine on tyres with forks Imperial

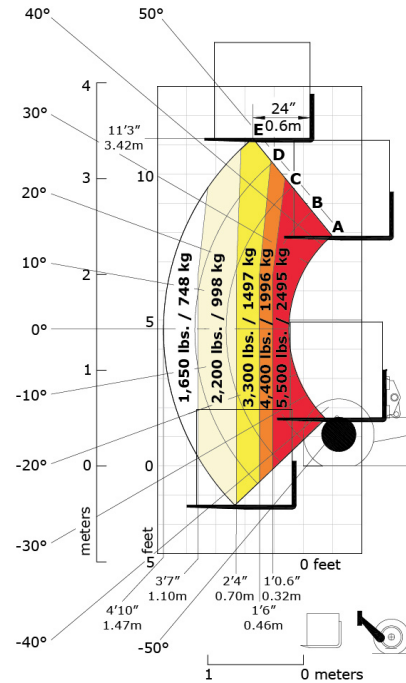


Machine on tyres with forks Metric

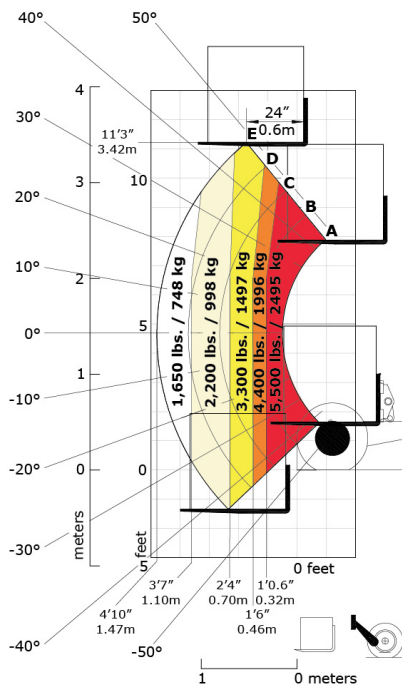

Machine on stabilizers with forks Imperial

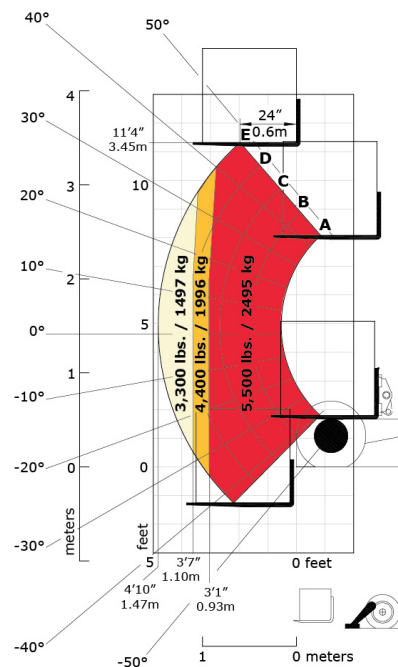

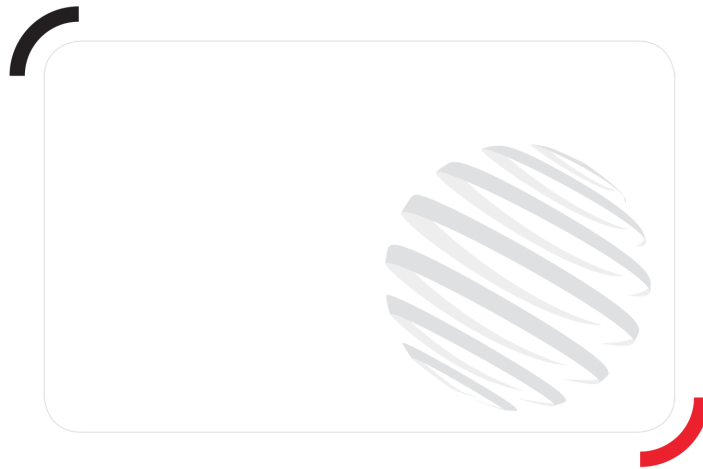

Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes