

SWATH AT PEAK PERFORMANCE

Honey Bee®
Harvest Faster

Front and Rear Hitch
The ST Grain Belt Swather from Honey Bee attaches to a three-point hitch on the front or rear of your tractor and is easy to mount and dismount, making transportation a breeze.

Static Left and Right Delivery

Left Delivery **Right Delivery** **Center Delivery**

The ST Grain Belt Swather from Honey Bee is designed to lay a swath that will keep your harvesting equipment working at peak performance, no matter how heavy or light your crop is. Choose from shifting decks that switch between left, right and center delivery, or static decks that deliver from left and right. With control over the number and widths of your swaths, you'll bale faster and pick up your forage crops more efficiently.

Contact us or visit our website to find a dealer near you:
 Honey Bee Manufacturing Ltd
 Phone: +1 306 296 2297
 E-mail: colin.macdonald@honeybee.ca
 Web: www.honeybee.ca

Available from:

ST GRAIN BELT SWATHER SPECIFICATIONS

Specifications	ST15	ST21	ST25	ST30	ST36
Width	15' (4.6 m)	21' (6.4 m)	25' (7.6 m)	30' (9.1 m)	36' (10.9 m)
Weight	3,500 lbs (1,587.6 kg)	4,200 lbs (1905 kg)	5,100 lbs (2313 kg)	6,200 lbs (2812 kg)	7,000 lbs (3175 kg)
Hydraulic System	Supplied by Honey Bee Pump				
Header Floatation	Supplied by Honey Bee Leaf Springs				
Cutting System	SCH Easy Cut, spring steel guards, bolted sections				
Knife Drive	SCH Epicyclic $3\frac{5}{16}$ " (8.4 cm) stroke, hydraulically driven, approximately 1,400 strokes per minute				
Draper	42" (106.7 cm) wide rubberized polyester, fiberglass reinforced rubber slats Hydraulically driven, speed adjustable from approximately 0 – 690 fpm (210 mpm)				
Reel(s)	1 – 15' (4.6 m)	1 – 21' (6.4 m)	1 – 25' (7.6 m)	1 – 30' (9.1 m)	1 – 36' (10.9 m)
Reel Drive	Honey Bee Reel – 6 bat, quick change plastic teeth, multiple spacing. Quick tie adjustment				
Gauge Wheels	Standard – using Tractor Hydraulic System c/w one drive motor. Reel speed adjustable in cab				
Storage Transport	Optional				
Cutterbar Poly Skid	Standard				
Hay Guard	Standard				
Manual Header Tilt	Standard				
Single Swath Table	131cm +1-15cm (105cm + 1-15cm with end strut gauge wheels)	N/A			
Double Swath Table	N/A	118cm + 1-15cm for end delivery configuration			
Double Swath Table		146cm + 1-15cm for center delivery configuration (121cm + 1-15cm with end strut gauge wheels)			

Available in widths from 15' to 36', the Honey Bee ST Swather table is designed to fit all 100+ HP tractors with a front or rear three-point hitch. Its quick and easy uncoupling makes this swather easy to transport down narrow roads.

Honey Bee®
Harvest Faster

ST GRAIN BELT SWATHER

MORE KNIFE POWER FOR A FASTER HARVEST

HarvestFaster.com [@HoneyBeeMfg](https://twitter.com/HoneyBeeMfg)

©Honey Bee is a registered trademark of Honey Bee Manufacturing Ltd.
Specifications subject to change.
Printed in France. Copyright 2019.
4102.01 02.19



BE THE BEST IN YOUR FIELD

If you're looking for fast, easy and cost-effective equipment for your farm, then look no further than the ST Grain Belt Swather from Honey Bee. Since it works on tractors with front-wheel assist, there's no need to purchase a self-propelled windrower.



HARVEST FASTER WHILE INCREASING YIELD




SCH Cutting System

The SCH Easy Cut Cutting System provides smooth, superior cutting. Spring steel guards with cutting edges on top and bottom, along with alternating, bolted, heat-treated sections, eliminate the need for hold downs. The system keeps dirt and debris from accumulating under the knives for increased performance in severe cutting conditions.




Double Swath

Using two shifting decks, double swath gives you in-cab control for right, left and centre delivery of your windrow.

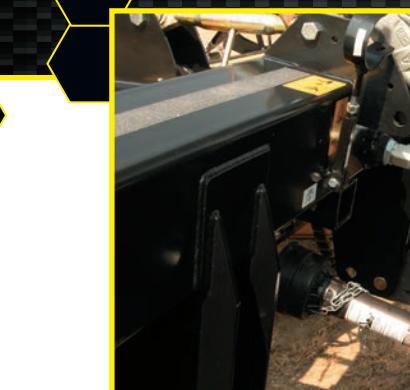

Adapter

The adapter subframe attaches to the three-point hitch on either the front or rear of the tractor. The PTO-driven pump is integrated into the subframe and is used to power the knife drives and draper belts.

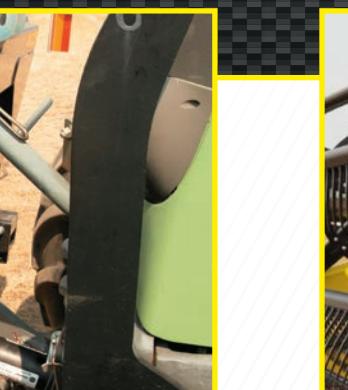

High Performance Honey Bee Reel

The custom-built, fully adjustable reel is hydraulically driven by the tractor. All reel functions are controlled through the tractor's hydraulic control valves for quick in-cab adjustment in changing crop conditions.



Draper Drive

The knife is driven by a 35 /16" (8.4 cm) stroke epicyclic knife drive that operates at 1,400 strokes per minute. The knife drive is driven by a low maintenance hydraulic drive motor. Double knife drive systems are standard equipment on 15', 21', 25', 30' and 36' models.



Castoring Gauge Wheels

Eliminate gouging when turning with vertically adjustable, castoring gauge wheels that are cushioned with a spring or compression rebound. Castoring gauge wheels are optional on ST30 and ST36.



Ziegler Vertical Shear Mounts

Equip your ST Swather with mounts for a Ziegler Vertical Shear to improve cutting in down or tall crops.



Hay Guard

Hay guard ensures a smooth transition from knife to draper and reduces material wrapping on the rollers.



In-cab Draper Speed Control

Quickly adjust to different crops and cutting conditions without leaving your tractor.