



# RR420 ROTARY RAKE

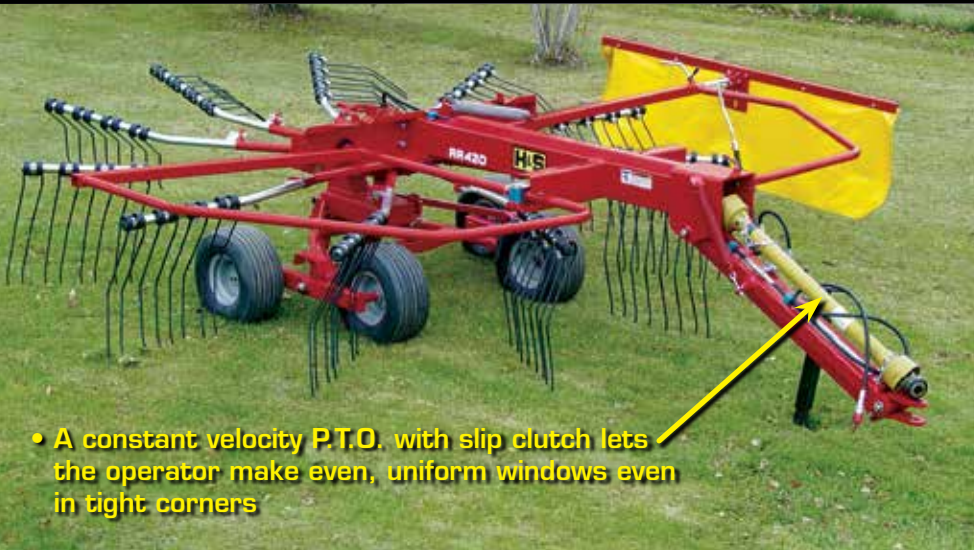


- A constant velocity P.T.O. with slip clutch lets the operator make even, uniform windows even in tight corners

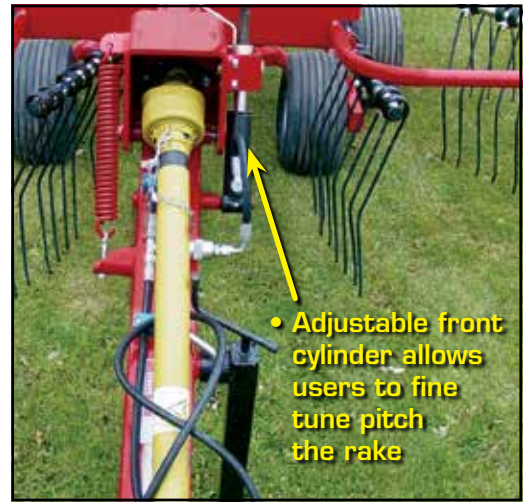

- Adjustable front cylinder allows users to fine tune pitch the rake


MODEL	RR420
NUMBER OF ARMS	11
NUMBER OF DOUBLE TINES PER ARM	4
WORKING WIDTH	13'8"
GEAR BOX	Sealed in oil bath
ROTOR DIAMETER (WORKING WIDTH)	11'2"
TRANSPORT WIDTH	5'9"
PTO DRIVELINE WITH SLIP CLUTCH	540 rpm Constant Velocity Overload Protects Gearbox
TIRES	4 Mounted On Tandem Axles 18X8.5x8
HP REQUIRED	30/45
WEIGHT	1369 lbs

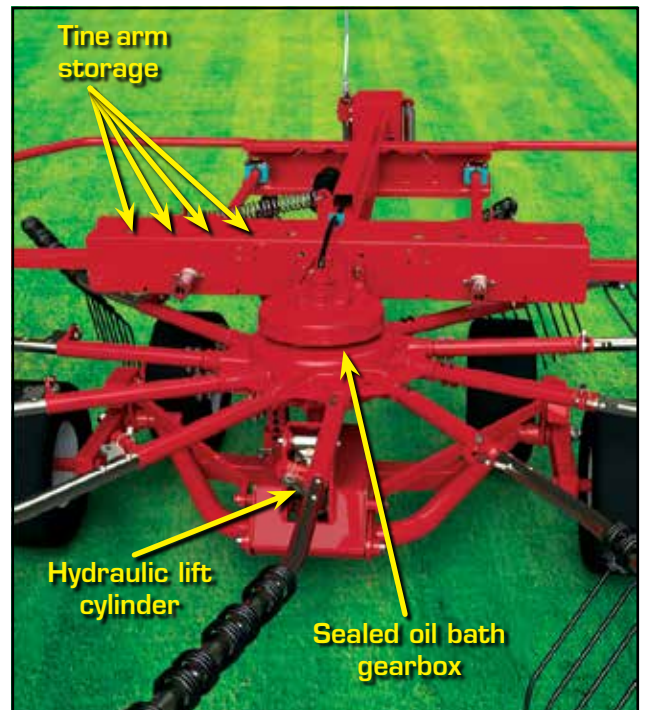

Tine arm storage


Hydraulic lift cylinder

Sealed oil bath gearbox

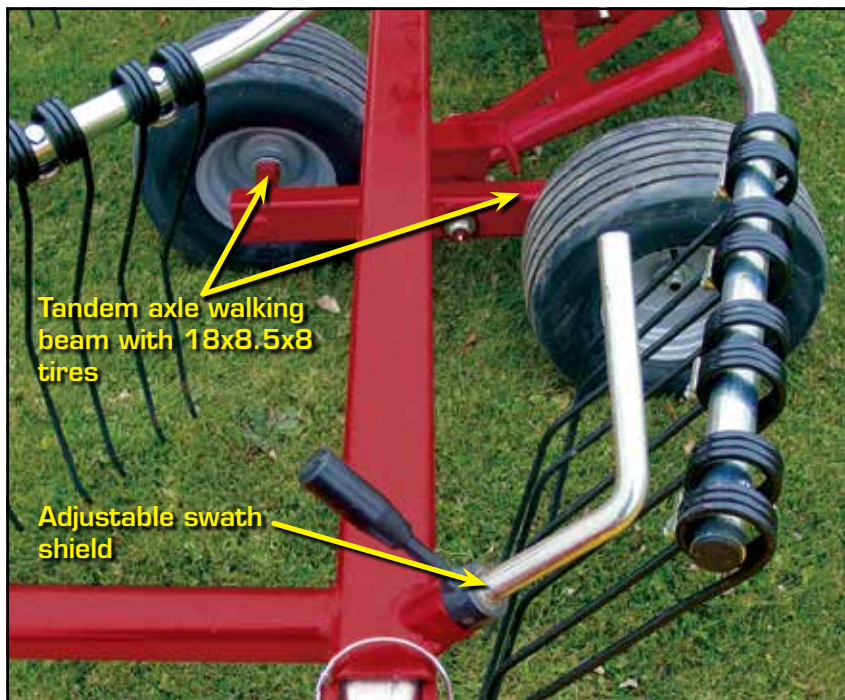

Tandem axle walking beam with 18x8.5x8 tires

Adjustable swath shield

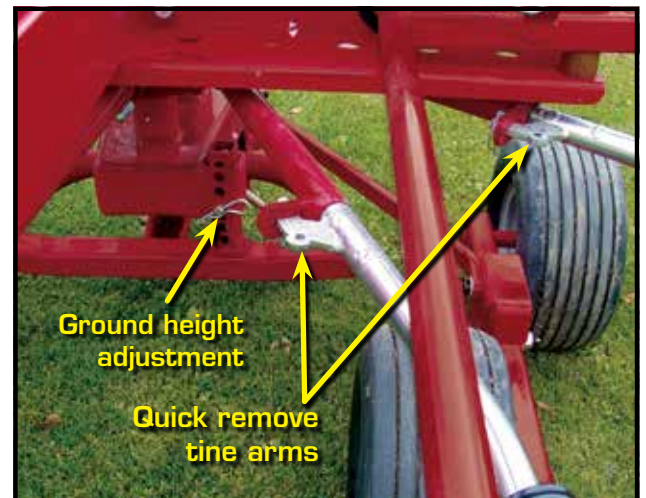

Ground height adjustment

Quick remove tine arms