

FEEDER WAGONS



STEEL ALL PURPOSI





Slant bars help prevent cattle from moving in and out. Low, comfortable height of tank sides. All sizes of cattle can feed with heads in unit *(EXCEPT CATTLE WITH HORNS)*.



E FEEDER WAGONS



The inside sidewalls and end panels can be removed for better feeding of square or round bales.

The panels are removable on the slant bar feeders.





The main feed pan is constructed of prime steel with the square tubing around the top of the feed pan. Square tubing is 40% stronger than pipe.

H&S bunks are easy to clean out spoiled feed from the feeder tub. No clutter of numerous pipes or tubes are welded in to clean around.






H&S bunks feature a 90° turning radius with tricycle front end, 6 hole hubs and wheels, and quick hitch tongue.

All models have a full axle all the way through the unit.

Specifications

SLANT BAR FEEDER WEIGHTS WITH 9.5L X 15 TIRES

16' SINGLE AXLE	1890 LBS.
20' SINGLE AXLE	2060 LBS.
24' SINGLE AXLE	2520 LBS.
24' TANDEM	2746 LBS.
30' TANDEM	3450 LBS.

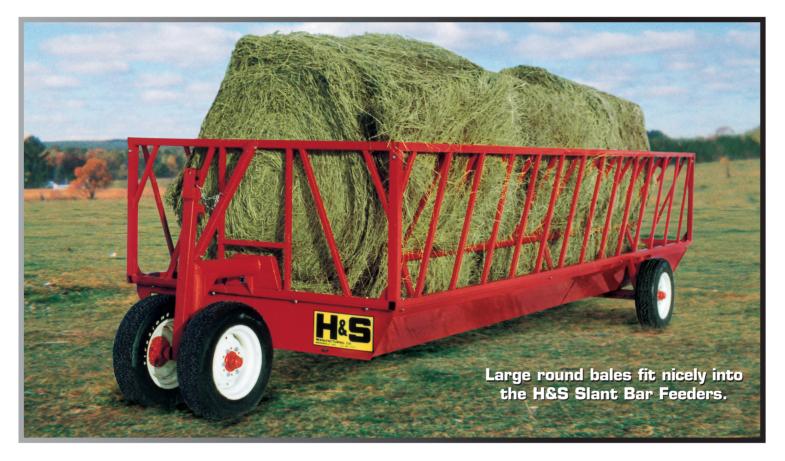

FAR SUPERIOR TO ANY SIMILAR FEEDER WAGON SLANT BAR FEEDER EFFICIENTLY FEEDS

- Chopped green feed.
- Large round and square bales.
- Small round and square bales.
- Silage and Haylage.
- Chopped hay and ground feed.
- 16' unit has 30 feeding openings.
- 20' unit has 36 feeding openings.
- 24' unit has 42 feeding openings.
- 30' unit has 50 feeding openings.

Warranty: See operators manual for warranty details and limitations. H&S reserves the right to change its products or the description at any time without notice or obligation.







NEED A QR CODE READER? DOWNLOAD THE FREE APP TO YOUR SMARTPHONE!

Models & specifications are subject to change without prior notice.

Buy the BEST

5/16 3M

H&S MANUFACTURING

2608 S. Hume Avenue P.O. Box 768 • Telephone (715) 387-3414 FAX (715) 384-5463 • Website www.hsmfgco.com



H&S WAREHOUSE 10145 Lakeshore Road P.O. Box 1260 • Telephone (716) 736-7595 FAX (716) 736-7596 • Website www.hsmfgco.com

RIPLEY, NY 14775