

WOODS

SNOW BLOWERS



Make quick work of moving all types
of snow – powder, crusted, icy or wet

WOODS

Snow Blowers



Tractor ranges: 15–175 hp

Available in six working widths
from 54- to 108-inches

Two-stage design gives you
more throwing force with
less horsepower



SB84C

Standard Duty

Models

- SB54S** Tractor range: 15–25 hp
- SB64S** Tractor range: 15–35 hp
- SB74C** Tractor range: 30–50 hp
- SB84C** Tractor range: 35–60 hp


- Three-point hitch: Cat 1 on SB54S and SB64S, Cat 1 and 2 on SB74C and SB84C (all models are ASAE quick-hitch compatible)
- Designed specifically for subcompact and compact tractors
- Move large amounts of snow in a short time with working widths from 54- to 84-inches
- Get more throwing force with less horsepower than single-stage snow blowers with Woods' two-stage design
- Reinforced steel side plates offer exceptional durability
- Make quick and easy adjustments using the optional hydraulic or electric chute rotator

Heavy Duty

Models

- SS84-2** Tractor range: 60–80 hp
- SS96-2** Tractor range: 80–150 hp
- SS108-2** Tractor range: 125–175 hp

- Three-point hitch: Cat 2 and 3
- These heavy-duty snow blowers have plenty of room to tackle the big storms with working widths from 84- to 108-inches, and up to a 38-inch working height
- Adjustments are a breeze with the 200-degree hydraulic chute rotation (standard on every SS model)
- Ensure faster, easier and safer hook-ups with ASAE quick-hitch compatibility
- Double your snow throwing power with two feeder augers on the SS96-2 and SS108-2 models

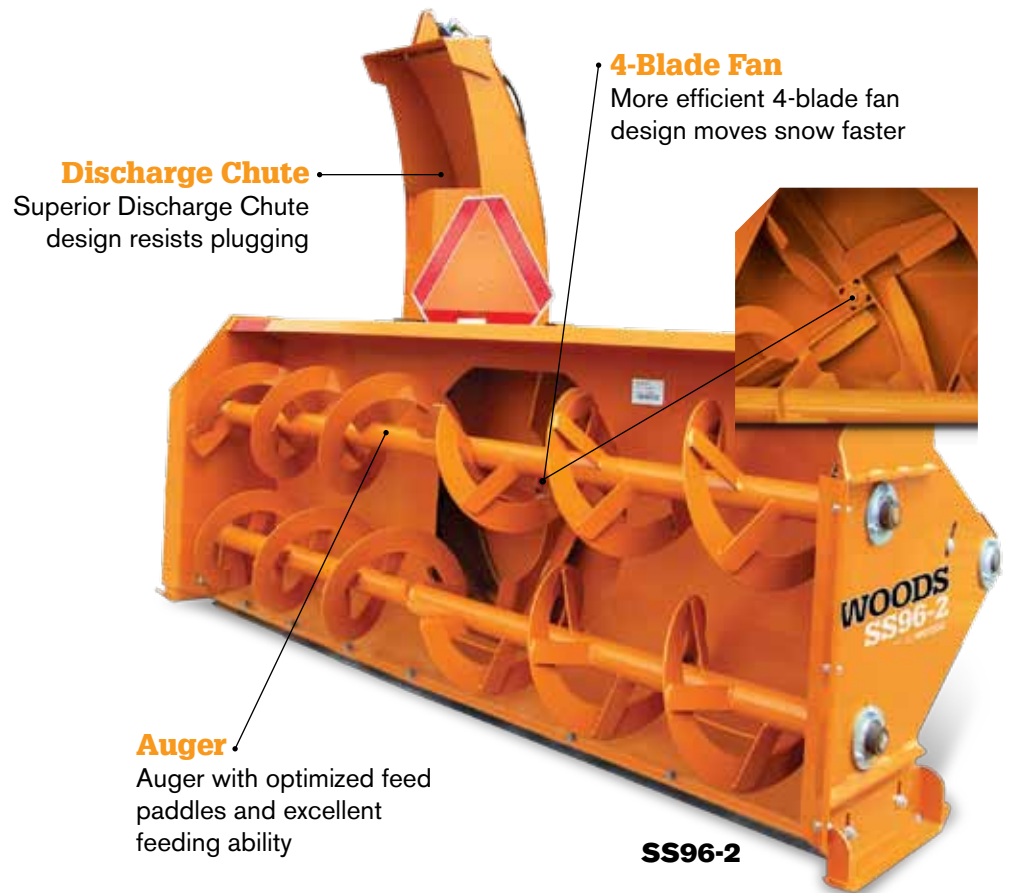

Discharge Chute
Superior Discharge Chute design resists plugging

4-Blade Fan
More efficient 4-blade fan design moves snow faster

Auger
Auger with optimized feed paddles and excellent feeding ability

SS96-2

Specifications	SB54S	SB64S	SB74C	SB84C	SS84-2	SS96-2	SS108-2
PTO Horsepower	15–25	15–35	30–50	35–60	60–80	80–150	125–175
Tractor PTO Speed	540 RPM					540/1000 RPM	
Hitch (All models are ASAE Quick Hitch Compatible)	Cat 1		Cat 1 & 2		Cat 2 & 3		
Working Width	54"	64"	74"	84"	84"	96"	108"
Transport Width	56"	66"	76"	86"	87.7"	99.7"	111.7"
Working Height	24"		26"		28"	38"	
Approximate Weight	415 lbs	436 lbs	592 lbs	632 lbs	1,210 lbs	1,420 lbs	1,741 lbs
Driveline	Cat 3				Cat 4		
Driveline Protection	shear bolt						
Drive Type–Fan	gearbox						
Drive Type–Auger	gearbox & chain						
Number of Feeder Augers	1					2	
Auger Flighting	.313" x 2"				.313" x 3"		
Chute Rotation	270°				200°, hydraulic		
Hydraulic Chute Rotator	optional				standard		
Fan Diameter	22"		24"		34"		
Fan Depth	6"		8"		9"		
Replaceable Skids	yes						
Adjustable Skids	yes						
Replaceable Cutting Edge	no				yes		
Telescoping 3-Point Hitch	no				yes		
	Standard Duty				Heavy Duty		

Woods Equipment A Blount International Company
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals.
©2012 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.



B121101 Revised April 2012



Printed in the USA with soy ink on paper using recycled content