

# IRONGRAFT



### AGRICULTURE

PRODUCT GUIDE REVISED FEBRUARY 11,2025

#### **ROTARY CUTTERS 3**

Single Spindle Rotary Cutters 3

**Dual/Multi Spindle Rotary Cutters** 8

Flex-Wing Rotary Cutters 10

#### MOWERS 18

Flail Mowers 18

**Finishing Mowers 21** 

#### LANDSCAPING 24

**Box Blades** 24

**Dual Edge Graders 26** 

**Grader Blades 28** 

Landscape Rakes 32

#### TILLAGE 33

Tillers 33

Harrows 38

**Moldboard Plows 41** 

**Aerators** 42

#### MATERIAL HANDLING 44

**Boom Poles 44** 

**Bale Unroller 45** 

### CONSTRUCTION & 46 MISCELLANEOUS

Post Hole Diggers 46

Quick Hitches 47

**Spreaders 48** 

**Auxiliary Hydraulic Kit 49** 

#### SKIDSTEER/FRONT END LOADER

Buckets 50

Grapples 55

Grapple Rakes 59

Hay Equipment 61

Manure Forks 66

Pallet Forks 67

Conversions 70

Snow Equipment 71

Quick Attach Plates 73

Tree Equipment 74

Brush Cutters 76

#### SNOWEQUIPMENT

77

50

Snow Cannon 77



### STANDARD-DUTY CUTTERS

IronCraft's 1200 series rotary cutters are a great choice for tractors ranging in PTO horsepower from 15 to 65. These single spindle rotary cutters are available in widths of 48", 60", and 72". They are designed to cut grass, weeds, and light brush up to 1-1/2" in diameter and are available in five different color choices.

















	1204	1205	1206
PTO HORSEPOWER	15-45 HP	20-45 HP	30-65 HP
CUTTING CAPACITY		1-1/2"	
CUTTING HEIGHT		2" MIN.	
CUTTING WIDTH	48"	60"	72"
OVERALL WIDTH	51"	63 "	75"
APPROXIMATE WEIGHT	538 LBS	596 LBS	726 LBS
GEARBOX RATING (HP)		55 HP	
INPUT PTO		SERIES 4	
DRIVELINE PROTECTION	SHEAR	PIN OR SLIP C	LUTCH
HITCH	CAT 1		
QH COMPATIBLE	YES		
DECK THICKNESS	11 GA		
SIDE BANDS	7"		
SKID SHOES (STANDARD)	REPLACEABLE		
BLADES	1/2" X 3"		
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS		G OR CHAINS
BLADE TIP SPEED	12,232 FPM	13,000 FPM	14,500 FPM
BLADE CARRIER	PAN		
NUMBER OF TAILWHEELS	1		
HUB	GREASEABLE		
WHEEL TYPE	LAMINATED		
GEARBOX WARRANTY	5 YEAR LIMITED		







### MEDIUM-DUTY SMOOTH-TOP CUTTERS

IronCraft's 300 series smooth-top rotary cutter is great for clearing grass and brush up to 2" in diameter. It is designed for tractors with 32 -90 PTO Horsepower and comes standard with a slip clutch and your choice of 5 different colors.



















	305	306 1-TW	306 S-TM
PTO HORSEPOWER	32 - 90 HP	45 - 90 HP	47 - 90 HP
CUTTING CAPACITY	2"	2"	2"
CUTTING HEIGHT		2" MINIMUM	
CUTTING WIDTH	60"	72"	72"
APPROXIMATE WEIGHT	640 LBS	740 LBS	740 LBS
GEARBOX RATING (HP)		100 HP	
INPUT PTO		SERIES 4	
DRIVELINE PROTECTION		SLIP CLUTCH	
HITCH		CAT 1	
QH COMPATIBLE	YES		
DECK THICKNESS	10 GA		
SIDE BANDS	8-1/2"		
SKID SHOES (STANDARD)	REPLACEABLE		
BLADES	1/2" X 3"		
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS		
BLADE TIP SPEED	13,000 FPM 14,500 FPM		00 FPM
BLADE CARRIER	1/2" PLATE		
NUMBER OF TAILWHEELS	1	1	2
HUB	GREASEABLE		
WHEEL TYPE	15" LAMINATED		
GEARBOX WARRANTY	5 YEAR LIMITED		





Ironcraft's heavy-duty 1500 series cutter is designed to cutter material up to 3" in diameter. It is offered in 3 working widths and five colors. It comes standard with a slip-clutch to protect the gearbox and driveline from damage. Rubber belting or chains are optional.


















	1505 1506		150 <i>7</i>
PTO HORSEPOWER	35 - 80 HP	40 - 80 HP	55 - 95 HP
CUTTING CAPACITY	2-1	1/2"	3"
CUTTING HEIGHT		2" MINIMUM	
CUTTING WIDTH	60"	72"	84"
APPROXIMATE WEIGHT	745 LBS	900 LBS	1305 LBS
GEARBOX RATING (HP)	100 HP	100 HP	150 HP
INPUT PTO	SER	IES 4	SERIES 6
DRIVELINE PROTECTION		SLIP CLUTCH	
HITCH	CA	Т1	CAT 2
QH COMPATIBLE	Y	ES	YES-CAT 2
DECK THICKNESS	10 GA		
SIDE BANDS	7"		
SKID SHOES (STANDARD)	REPLACEABLE		
BLADES	1/2" X 3" UPLIFT		
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS		
BLADE TIP SPEED	14,500 FPM		
BLADE CARRIER	1/2" PLATE		
NUMBER OF TAILWHEELS	1		
HUB	GREAS	EABLE	BEARING
WHEEL TYPE	LAMINATED		
GEARBOX WARRANTY	5 YEAR LIMITED		)







### **HEAVY-DUTY CUTTERS**



Available in cutting widths of 72" or 84", the 1600 series cutter is a heavy-duty single spindle cutter and cut grass and brush up to 3" in diameter. With a choice of different colors you can match your cutter to your tractor.



















	1606	1607
PTO HORSEPOWER	47 - 100 HP	55 - 100 HP
CUTTING CAPACITY	3	"
CUTTING HEIGHT	2" MIN	IMUM
CUTTING WIDTH	72"	84"
APPROXIMATE WEIGHT	1205 LBS	1375 LBS
GEARBOX RATING (HP)	100	НР
INPUT PTO	SERI	ES 6
DRIVELINE PROTECTION	SLIP C	LUTCH
HITCH	CAT 1/2	
QH COMPATIBLE	YES - CAT 2	
DECK THICKNESS	7 GA	
SIDE BANDS	8"	
SKID SHOES (STANDARD)	REPLACEABLE	
BLADES	1/2" X 4"	
GUARDING	OPTIONAL RUBBER BELTING OR CHAINS	
BLADE TIP SPEED	16,800 FPM	
BLADE CARRIER	1/2" PLATE	5/8" PLATE
NUMBER OF TAILWHEELS	2	
HUB	BEAI	RING
WHEEL TYPE	LAMINATED	
GEARBOX WARRANTY	5 YEAR LIMITED	



# 970 HEAVY-DUTY ROUNDBACK CUTTER

The robust 970 Roundback Rotary Cutter has an 84" cutting width. It works well with 60 horsepower and larger tractors. The 970 provides the cutting power to slash its way through heavy brush and small trees up to 4" diameter. The 970 is perfect for maintaining the farm or the roadside. The smooth top deck design prevents build-up of debris or other cuttings and makes cleanup fast and easy.



















	970	
PTO HORSEPOWER	60 HP MINIMUM	
CUTTING CAPACITY	4"	
CUTTING HEIGHT	1" MINIMUM	
CUTTING WIDTH	84"	
OVERALL WIDTH	90"	
APPROXIMATE WEIGHT	1450 LBS	
CENTER GEARBOX RATING	175 HP	
INPUT PTO	SERIES 6	
DRIVELINE PROTECTION	SLIP CLUTCH	
HITCH	CAT 2	
QUICK HITCH COMPATIBLE	YES	
DECK THICKNESS	7 GA	
SIDE BANDS	1/4" X 12"	
SKID SHOES (STANDARD)	1/4" W/ REPLACEABLE LIP	
BLADES	1/2" X 4"	
GUARDING	CHAINS STANDARD	
BLADE TIP SPEED	16,500 FPM	
BLADE CARRIER	3/16" FORMED PLATE	
NUMBER OF TAILWHEELS	2	
HUB	BEARING	
WHEEL TYPE	LAMINATED	
GEARBOX WARRANTY	5 YEAR LIMITED	





### **HEAVY-DUTY MULTI-SPINDLE CUTTERS**

The 1800 series is IronCraft's heavy-duty dual spindle cutters. They are designed to work with tractors ranging in pto horsepower from 42 to 125 and cut material up to 3" in diameter. They are available with lift and pull type hitches as well as five different color choices.



















	1808	1810	
PTO HORSEPOWER	42 HP MIN	52 HP MIN	
CUTTING CAPACITY	3	ш	
CUTTING HEIGHT	2" TO	2" TO 10"	
CUTTING WIDTH	96"	120"	
OVERALL WIDTH	98"	122"	
APPROXIMATE WEIGHT	1250 LBS	1480 LBS	
CENTER GEARBOX RATING	125 HP		
OUTBOARD GEARBOX Rating	100 HP		
INPUT PTO	SERIES 5		
DRIVELINE PROTECTION	SLIP CLUTCH		
CENTER DRIVESHAFT	SHOCK COUPLER PROTECTED		
HITCH	CAT 1 & 2		

	1808	1810
DECK THICKNESS	10 GA	7 GA
SIDE BANDS	8	,"
SKID SHOES (STANDARD)	REPLACEABLE	
BLADES	1/2" X 3" UPLIFT	
GUARDING	OPTIONAL CHAINS	
BLADE TIP SPEED	17,100 FPM	15,235 FPM
BLADE CARRIER	1/2" PLATE	
NUMBER OF TAILWHEELS	2	
HUB	BEARING	
WHEEL TYPE	LAMINATED	
GEARBOX WARRANTY	5 YEAR LIMITED	

# 2400 SERIES FRONCRAFT

The 2400 series is IronCraft's heavy-duty dual spindle cutters. They are designed to work with tractors ranging in pto horsepower from 42 to 125 and cut material up to 3" in diameter. They are available with lift and pull type hitches as well as ive different color choices.



















	2408	2410
PTO HORSEPOWER	42 HP MIN	52 HP MIN
CUTTING CAPACITY	3"	
CUTTING HEIGHT	3-1/2	" TO 10"
CUTTING WIDTH	96"	120"
OVERALL WIDTH	98"	122"
APPROXIMATE WEIGHT	Lift-1450lbs / Pull-1600 lbs	Lift-1585lbs / Pull-1680 lbs
CENTER GEARBOX RATING	125 HP	
OUTBOARD GEARBOX Rating	75 HP	
INPUT PTO	SERIES 5	
DRIVELINE PROTECTION	SLIP CLUTCH	
CENTER DRIVESHAFT	SHOCK COUPLER PROTECTED	
HITCH	CAT 1 & 2	

	2408	2410
DECK THICKNESS	10 GA	10 GA
SIDE BANDS	1	1"
SKID SHOES (STANDARD)	REPLACEABLE	
BLADES	1/2" X 4" UPLIFT	
GUARDING	OPTIONAL CHAINS	
BLADE TIP SPEED	17,100 FPM 15,235 FPM	
BLADE CARRIER	B/16" Formed Plate w/ 3/4" x 2" Blade Bar	
NUMBER OF TAILWHEELS	2	
HUB	BEARING	
WHEEL TYPE	LAMINATED	
GEARBOX WARRANTY	5 YEAR LIMITED	

2510 place holder page



If you are looking for a Flex-Wing Rotary Cutter for your compact tractor, the IronCraft 2512 is the choice for you. With its smooth top deck and spring suspension, this flex-wing is designed to cut grass, weeds, and light brush up to 2" in material while only requiring a minimum PTO horsepower of 35 and one hydraulic outlet. With five different color choices you are able to match your cutter to your tractor.













	2512	
PTO HORSEPOWER	"35 PTO HP MINIMUM (GEAR DRIVE TRANSMISSION)"	
CUTTING WIDTH	144"	
OVERALL WIDTH	151"	
OVERALL LENGTH W/ WHEEL	158"	
TRANSPORT WIDTH	89-3/4"	
TRANSPORT HEIGHT	68"	
CUTTING CAPACITY	UP TO 2"	
CUTTING HEIGHT	1-1/2" TO 12"	
APPROXIMATE WEIGHT	2,630 LBS W/4-20" LAMINATED TIRES	
APPROXIMATE TONGUE WEIGHT	759 LBS	
BLADE TIP SPEED	15,657 FPM	
BLADES	1/2" X 3" W/ LIFT	
OUTBOARD GEARBOXES	75 HP	
SPLITTER GEARBOX	175 HP	
GEARBOX RPM	540 RPM	
GEARBOX OIL	85W-140 (FACTORY FILLED)	
OUTPUT SHAFT DIAMETER	2"	
INPUT PTO	ASAE CAT 5 CV	
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH	

HITCH	SWIVEL CLEVIS	
DECK THICKNESS	10 GA	
SIDE SKIRT MATERIAL	3/16"	
HEIGHT ADJUSTMENT	HYD. CYLINDER	
WING ADJUSTMENTS	TURNBUCKLE	
SUSPENSION	SINGLE SPRING	
WING FLEX	22 DEGREES DOWN TO 87 DEGREES UP	
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP	
WING CYLINDERS	SINGLE ACTING STD	
SKID SHOES (STANDARD)	STD & REPLACEABLE	
SAFETY DEFLECTORS	SINGLE ROW STANDARD	
TOW CHAINS	STANDARD	
BLADE OVERLAP	6"	
BLADE CARRIER	3/16" FORMED PLATE W/ 1" X 6" BAR	
WHEELS & TIRES	4-20" laminated Std (4-20" aircraft optional)	
DECK RINGS	N/A	
LIGHT KIT	N/A	
GEARBOX WARRANTY	5 YEAR LIMITED	





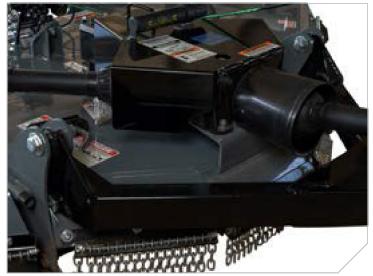

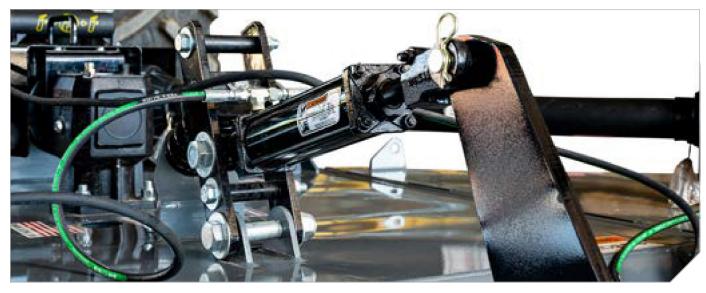



IronCraft's 2515 will make quick work of tough jobs. This 15' Flex-Wing Rotary Cutter is designed for tractors with a minimum PTO horsepower of 50. It only requires one hydraulic remote and can cut material up to 2-1/2" in diameter. Match your cutter to your tractor with five different color choices.












	2515	
PTO HORSEPOWER	50 PTO HP MINIMUM	
CUTTING WIDTH	180"	
OVERALL WIDTH	188"	
OVERALL LENGTH W/ WHEEL	186"	
TRANSPORT WIDTH	90"	
TRANSPORT HEIGHT	83" - 87"	
CUTTING CAPACITY	UP TO 2-1/2"	
CUTTING HEIGHT	2" TO 15"	
APPROXIMATE WEIGHT	4500 LBS W/6-26" LAMINATED TIRES	
APPROXIMATE TONGUE WEIGHT	1500 LBS	
BLADE TIP SPEED	17,135 FPM (540 OR 1000 RPM)	
BLADES	1/2" X 4" UPLIFT	
OUTBOARD GEARBOXES	190 HP	
SPLITTER GEARBOX	235 HP	
GEARBOX RPM	540 OR 1000 RPM	
GEARBOX OIL	85W-140 (FACTORY FILLED)	
OUTPUT SHAFT DIAMETER	2"	
INPUT PTO	ASAE CAT 6 CV	
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH	

HITCH	SWIVEL PIVOT SELF LEVELING		
DECK THICKNESS	10 GA		
SIDE SKIRT MATERIAL	1/4" X 13-1/2"		
HEIGHT ADJUSTMENT	HYD. CYLINDER		
WING ADJUSTMENTS	HEAVY DUTY TURNBUCKLE		
SUSPENSION	1 HEAVY DUTY SPRING		
WING FLEX	22 DEGREES DOWN TO 88 DEGREES UP		
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP		
WING CYLINDERS	SINGLE ACTING STD		
SKID SHOES (STANDARD)	REPLACEABLE		
SAFETY DEFLECTORS	SINGLE ROW STANDARD		
TOW CHAINS	STANDARD		
BLADE OVERLAP	6"		
BLADE CARRIER	ROUND PAN		
WHEELS & TIRES	4-20" laminated std (optional 4 or 6 tires in 26" laminated, 29" aircraft or 26" foam filled)		
DECK RINGS	N/A		
LED LIGHT KIT	OPTIONAL		
GEARBOX WARRANTY	5 YEAR LIMITED		

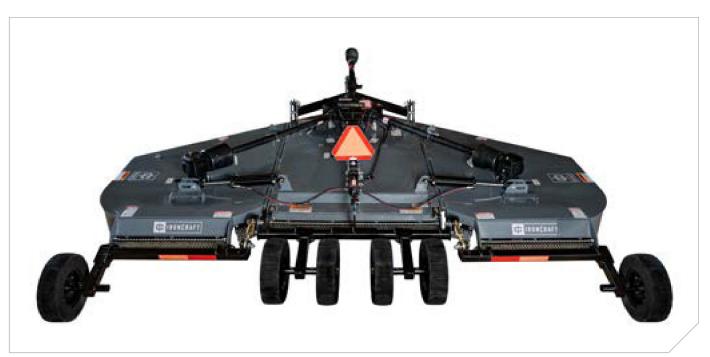









The 3515 is IronCraft's Heavy-Duty 15' Flex-Wing Rotary Cutter. It has a heavy 7 Gauge press formed blade pan that is strategically designed for greater rotational balance, better cut quality, and greater gearbox longevity and a reinforced deck. The 3515 can cut material up to 3-1/2" with a minimum PTO horsepower requirement of 60 and is available in five different color choices.











	3515	
PTO HORSEPOWER	60 PTO HP MINIMUM	
CUTTING WIDTH	180"	
OVERALL WIDTH	188"	
OVERALL LENGTH W/ WHEEL	200"	
TRANSPORT WIDTH	90"	
TRANSPORT HEIGHT	83" - 87"	
CUTTING CAPACITY	UP TO 3-1/2"	
CUTTING HEIGHT	2" TO 15"	
APPROXIMATE WEIGHT	5600 LBS W/ 6-26" LAMINATED TIRES	
APPROXIMATE TONGUE WEIGHT	1900 LBS	
BLADE TIP SPEED	17,135 FPM (540 OR 1000 RPM)	
BLADES	1/2" X 4" UPLIFT	
OUTBOARD GEARBOXES	190 HP	
SPLITTER GEARBOX	235 HP	
GEARBOX RPM	540 OR 1000	
GEARBOX OIL	85W-140 (FACTORY FILLED)	
OUTPUT SHAFT DIAMETER	2"	
INPUT PTO	ASAE CAT 6 CV	
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH	

HITCH	SWIVEL PIVOT SELF LEVELING	
DECK THICKNESS	10 GA	
SIDE SKIRT MATERIAL	1/4" X 13-1/2"	
HEIGHT ADJUSTMENT	HYD. CYLINDER	
WING ADJUSTMENTS	HEAVY DUTY TURNBUCKLE	
SUSPENSION	2 HEAVY DUTY SPRINGS POSITIONED ON THE CENTER TAIL WHEEL AXLE	
WING FLEX	22 DEGREES DOWN TO 100 DEGREES UP	
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP	
WING CYLINDERS	DUAL ACTING STD	
SKID SHOES (STANDARD)	REPLACEABLE	
SAFETY DEFLECTORS	SINGLE ROW STANDARD	
TOW CHAINS	STANDARD	
BLADE OVERLAP	6"	
BLADE CARRIER	ROUND PAN	
WHEELS & TIRES	4-20" laminated std (optional 4, 6 or 8 tires in 26" laminated, 29" aircraft or 26" foam filled)	
DECK RINGS	STANDARD	
LED LIGHT KIT	OPTIONAL	
GEARBOX WARRANTY	5 YEAR LIMITED	











The 3520 is IronCraft's Heavy-Duty 20' Flex-Wing Rotary Cutter. Wheter you're maintaining utility right-of way, airports, fields or trail systems - the 3520 will be your trusted sidekick. Built for the toughest conditions, the 3520 provides a cleaner, more reliable cut while being easy to maintain and service.













	3520		
PTO HORSEPOWER	80 PTO HP MINIMUM		
WORKING WIDTH	240"		
OVERALL WIDTH	249"		
OVERALL LENGTH W/ WHEEL			
TRANSPORT WIDTH	94" ( with tandems 108")		
TRANSPORT HEIGHT			
CUTTING CAPACITY	4"		
CUTTING HEIGHT	2" TO 15"		
APPROXIMATE WEIGHT	8700 LBS W/ 8-26" LAMINATED TIRES		
APPROXIMATE TONGUE WEIGHT	2,700 LBS		
BLADE TIP SPEED	540 RPM-16,600 FPM/1000RPM-17,400FPM		
BLADES	1/2" X 4" UPLIFT		
OUTBOARD GEARBOXES	225 HP		
SPLITTER GEARBOX	275 HP		
GEARBOX RPM	540 OR 1000		
GEARBOX OIL	85W-140 (FACTORY FILLED)		
OUTPUT SHAFT DIAMETER			
INPUT PTO	ASAE CAT 6		
WING DRIVE PTO	ASAE CAT 6		

HITCH	SWIVEL PIVOT SELF LEVELING		
DECK THICKNESS	10 GA CENTER DECK/ 7 GA WING DECKS		
SIDE BANDS	1/4" X 13-1/2"		
HEIGHT ADJUSTMENT			
WING ADJUSTMENTS			
SUSPENSION	2 HEAVY DUTY SPRINGS POSITIONED ON THE CENTER TAIL WHEEL AXLE		
WING FLEX	22 DEGREES DOWN TO 100 DEGREES UP		
WING FREE FLOAT			
WING CYLINDERS			
SKID SHOES (STANDARD)	REPLACEABLE		
SAFETY DEFLECTORS	SINGLE ROW STANDARD		
TOW CHAINS	STANDARD		
WALKING TANDEMS	OPTIONAL		
BLADE CARRIER	ROUND PAN		
WHEEL TYPE	26" LAMINATED, 26" FOAM FILLED, OR 29" PNEUMATIC		
DECK RINGS	STANDARD		
LED LIGHT KIT	STANDARD		
GEARBOX WARRANTY	5 YEAR LIMITED		



The FL series flail mower is compact and light, making it the perfect choice for sub-compact or compact tractors ranging in PTO horsepower from 23 to 40. This is a great attachment for weekend farmers and gardening. It is available with hammers and blades.



	FL-135	FL-165	
PTO HORSEPOWER	23 - 35 HP	25 - 40 HP	
CUTTING WIDTH	52"	64"	
OVERALL WIDTH	57"	69"	
HITCH	CA	Т 1	
WEIGHT	386 LBS	518 LBS	
NUMBER OF HAMMERS	24		
NUMBER OF BLADES	48		
ROLLER THICKNESS	10 GAUGE		
ROTOR THICKNESS	5/16"		
FRAME THICKNESS	9 GAUGE		
BELTS	3		
WARRANTY	1 YEAR 1 YEAR		











# FMH SERIES STANDARD-DUTY FLAIL MOWER IRONCRAFT





The FMH series has a wide working width up to 86" reach and can mow up to 1-1/2" diameter material with the use of flails or hammers. It comes standard with hammers, hydraulic side shift, rear roller, and rakes. Knives are additional.









	FMH-160H	FMH-160H FMH-175H		FMH-220H	
PTO HORSEPOWER	35 - 70 HP	40 - 70 HP	45 - 70 HP	50 - 70 HP	
MOWING WIDTH	63"	69"	80.7"	86-1/2"	
OVERALL WIDTH	69"	75-1/2"	84.4"	93"	
HITCH		CAT 1,	, 3-PT		
WEIGHT	908 LBS	957 LBS	1,063 LBS	1,1116 LBS	
HYDRAULIC OFFSET		12	טיי פייני		
NUMBER OF HAMMERS	20	22	26	28	
BELTS	4				
WARRANTY	1 YEAR				



Designed for tractors ranging in horsepower from 50 to 100, the BPF series can cut up to 3" material. It has a open deck design for easy maintenance. It comes standard with hydraulic side shift and a rear roller.



	BPF-225	BPF-250	
PTO HORSEPOWER	50 - 100 HP		
WORKING WIDTH	87"	98"	
OVERALL WIDTH	96"	106"	
HITCH	CAT 2	, 3-PT	
WEIGHT (W/OUT PTO)	1,726 LBS	1,907 LBS	
NUMBER OF HAMMERS	20 24		
NUMBER OF BLADES	60 72		
BELTS	4	5	
ROLLER DIAMETER	6.69"		
ROTOR DIAMER	6.69"		
WARRANTY	1 YEAR		















IronCraft's SGM series finishing mowers provide a superior cutting quality for turf surfaces and well-maintained lawns. They work well for the needs of golf courses, large estate owners, municipalities, ranchers, or commercial mowing and landscape operations.











	SGM-4	SGM-S	SGM-6	SGM-7			
PTO HORSEPOWER	14 - 23 HP	23 -32 HP	32 - 40 HP	35 - 65 HP			
CUTTING WIDTH	48"	60"	72"	84"			
HITCH		CAT 1					
QH COMPATIBLE		YE	ES				
WEIGHT	420 LBS	420 LBS 440 LBS 500 LBS 600 LBS					
NUMBER OF BLADES	3						
NUMBER OF BELTS	2						
WARRANTY	1 YEAR						



Offset flail mowers go further to tackle areas where a brush mower can't without backing up.





	FRF125	FRF145	FRF165
TRACTOR HP	20-40 HP	30-45 HP	40-50 HP
WEIGHT	630 lb	672 lb	703 lb
HITCH	CAT 1	CAT 1	CAT 1
CUTTING WIDTH	47 in	55 in	63 in
# OF HAMMER Blades	20	24	28
HAMMER Dimensions	3.4 in x 1.7 in		
SIDE Transmission	3 BELTS 3 BELTS 4 BELTS		4 BELTS
ROTOR DIAMETER	4.2 in		
ROLLER DIAMETER	4.7 in		
PTO SHAFT SERIES	4		





### **BRF SERIES**







The multi-purpose capability of IronCraft's BRF series makes it ready to face anything! Even on uneven terrain, it shreds grass, weeds, and brushwood up to 2" in diameter. Robust, yet easy to handle in tight areas, IronCrafts new BRF line is ideal for ripping, leveling, finish grading, and backfilling applications.



	BRF160 E	RF180	BRF200
TRACTOR HP	70-100 HP	70-100 HP	70-100 HP
WEIGHT	1433 lb	1565 lb	1719 lb
HITCH	CAT 2	CAT 2	CAT 2
CUTTING WIDTH	63 in	71 in	79 in
# OF HAMMER Blades	14	16	16
HAMMER DIMENSIONS	4.9 in x 1.7 in		
SIDE Transmission	4 BELTS		
ROTOR DIAMETER	6.3 in		
ROLLER DIAMETER	7.6 in		
PTO SHAFT Series	6		





IronCraft's 3100 series box blades are ideal for use on the farm, at building sites, or outdoor arenas. They are designed to work topsoil, gravel, mulch, or manure. They feature adjustable shanks and are available in five different widths and color choices.



















	3104	3105	3106	3107	3108
HORSEPOWER REQUIRED			15-45 HP		
WORKING WIDTH	48"	60"	72"	84"	96"
MOLDBOARD HEIGHT			17"		
OVERALL DEPTH		22"			
WEIGHT	290 LBS	323 LBS	357 LBS	390 LBS	421 LBS
NUMBER OF SHANKS	3	4	5	6	6
A-FRAME MATERIAL	3/8"				
CUTTING EDGES	6"				
QUICK HITCH COMPATIBLE	YES				
HITCH	CAT 1				
WARRANTY	1 YEAR				



### **HEAVY-DUTY BOX BLADES**



For tough jobs, the 3200 heavy-duty box scrapers will help maintain your farm, building site, or landscaping. They make quick work of ripping up dirt, grading and leveling land, or spreading soil. They are available in 3 different working widths and choice of 5 different colors.

















	3206	3207	3208		
HORSEPOWER REQUIRED		30 - 70 HP			
WORKING WIDTH	72"	84"	96"		
MOLDBOARD HEIGHT		17"			
OVERALL DEPTH		22"			
WEIGHT	530 LBS	586 LBS	640 LBS		
NUMBER OF SHANKS	5	6	6		
A-FRAME MATERIAL	1/2"				
CUTTING EDGES	6"				
QUICK HITCH COMPATIBLE	YES				
HITCH	CAT 1 & 2				
WARRANTY		1 YEAR			



STANDARD-DUTY DUAL EDGE GRADERS

IronCraft's 3600 dual-edge graders can be used to maintain gravel driveways, level a garden plot, and smooth dirt areas including horse arenas and barn floors. They feature replaceable skid shoes, reversible blades, adjustable blade height and shanks.













	3605	3606	
HORSEPOWER REQUIRED	25 -55 HP	35 - 55 HP	
WORKING WIDTH	60"	72"	
OVERALL WIDTH	65-5/8"	77-5/8"	
OVERALL LENGTH	52-	7/8"	
OVERALL HEIGHT	33-	3/4"	
WEIGHT W/ SHANKS	490 LBS	545 LBS	
NUMBER OF SHANKS	4 5		
A-FRAME MATERIAL	3/8"		
SIDE PANEL THICKNESS	3/16"		
SIDE PANEL HEIGHT	15-11/16"		
SIDE PANEL LENGTH	46-3/8"		
LOWER DRAFT LINK ATTACH	CLEVIS TYPE		
HITCH	CAT 1		
QH COMPATIBLE	YES		

	3605	3606
SCARIFIER SUPPORT TUBE	4" X 4"	X 1/4"
REAR BEAM Construction	3" X 3" X 3/16"	
SKID SHOES (STANDARD)	REPLAC	CEABLE
SKID SHOE DIMENSION	3/16" X 2-3/4" X 47-3/8"	
SHANK CONSTRUCTION	3 POSITION, HEAT TREATED W/ DIMPLED ON HARDENED TIPS	
SHANK ADJUSTMENT	1-1/2" AT GRADE LEVEL & 3" BELOW GRADE LEVEL	
CUTTING EDGE	REVERSIBLE 3/8" X 6"	
CUTTING EDGE Placement	CDACING DOCITIONED DADALLEL ON A	
CUTTING EDGE Adjustment	VERTICAL ADJUSTMENT FROM LEVEL GRADE TO 1" BELOW GRADE	
WARRANTY	1 YEAR	



### **HEAVY-DUTY DUAL EDGE GRADERS**

The 3700 series dual edge graders are designed for tractors ranging in horsepower from 40 - 80 and are quick hitch compatible. Featuring replaceable skid shoes, reversible blades, adjustable blade height and shanks, they can be used to maintain gravel driveways, smooth areas of dirt, and level garden plots.















	3707	3708	
HORSEPOWER REQUIRED	40 - 80 HP	50 - 80 HP	
WORKING WIDTH	84"	96"	
OVERALL WIDTH	89-5/8"	101-5/8"	
OVERALL LENGTH	58-1	1/2"	
OVERALL HEIGHT	33-3/4"		
WEIGHT W/ SHANKS	700 LBS	740 LBS	
NUMBER OF SHANKS	6	6	
A-FRAME MATERIAL	3/8"		
SIDE PANEL THICKNESS	3/16"		
SIDE PANEL HEIGHT	15-11/16"		
SIDE PANEL LENGTH	52-3/8"		
LOWER DRAFT LINK ATTACH	CLEVIS TYPE		
HITCH	CAT 1 & 2		
QH COMPATIBLE	YES		

	3707	3708
SCARIFIER SUPPORT TUBE	4" X 4"	X 1/4"
REAR BEAM CONSTRUCTION	3" X 3"	X 3/16"
SKID SHOES (STANDARD)	REPLAC	CEABLE
SKID SHOE DIMENSION	3/16" X 2-3/4" X 47-3/8"	
SHANK CONSTRUCTION	3 POSITION, HEAT TREATED W/ DIMPLED ON HARDENED TIPS	
SHANK ADJUSTMENT	1-1/2" AT GRADE LEVEL & 3" BELOW GRADE LEVEL	
CUTTING EDGE	REVERSIBLE 3/8" X 6"	
CUTTING EDGE PLACEMENT	TWO GRADING BLADES W/ 19-7/8"" SPACING POSITIONED PARALLEL ON A 10 DEGREE GRADING ANGLE	
CUTTING EDGE ADJUSTMENT	VERTICAL ADJUSTMENT FROM LEVEL GRADE TO 1" BELOW GRADE	
WARRANTY	1 YI	EAR



The 4100 Series economy grader blade is for your smaller horsepower tractors ranging in horsepower from 15 - 35. They will handle your basic land grading, small construction, or maintenance jobs with ease.













	4104	4105	4106	4107
HORSEPOWER REQUIRED	15 - 35 HP			
WORKING WIDTH	48"	60"	72"	84"
MOLDBOARD HEIGHT	1:	3"	:	14"
WEIGHT	158 LBS	179 LBS	202 LBS	223 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE			
A-FRAME MATERIAL	3/8"			
CUTTING EDGES	6"			
HITCH	CAT 1			
QH COMPATIBLE	NO			
WARRANTY		1 YEAR		



### STANDARD-DUTY GRADER BLADES



IronCraft's 4300 series standard duty box blade are ideal for basic land grading, leveling, or backfilling. They are available in 4 different working widths and feature five position angle adjustment as well as three-position tilt adjustment.









	4304	4305	4306	4307
HORSEPOWER REQUIRED		15 - 4	5 HP	
WORKING WIDTH	48"	60"	72"	84"
MOLDBOARD HEIGHT	1	3"	14	1"
WEIGHT	178 LBS	199 LBS	252 LBS	276 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE			
TILT ADJUSTMENT	3 POSITION			
A-FRAME MATERIAL	3/8"			
CUTTING EDGES	6"			
HITCH	CAT 1			
QH COMPATIBLE	NO			
WARRANTY		1 YE	EAR	



These Offset Grader Blades offer ease of moving topsoil, gravel, snow, and other similar materials. They are built to give you years of reliable performance, and are designed to work with 35 to 65 hp tractors.













	4405	4406	4407
HORSEPOWER REQUIRED		35 - 65 HP	
WORKING WIDTH	60"	72"	84"
MOLDBOARD HEIGHT		15-1/2"	
WEIGHT	323 LBS	340 LBS	358 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE		
TILT ADJUSTMENT	3 POSITION		
A-FRAME MATERIAL	3/8"		
CUTTING EDGES	6"		
HITCH	CAT 1		
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		

# 4500 SERIES THEAVY-DUTY GRADER BLADES TRONCRAFT



These Heavy-Duty Grader Blades are IronCraft's toughest grader blades. These models will easily meet all of your land grading, leveling, or backfilling needs. Designed for 50 to 75 hp tractors, they feature a five-position angle adjustment, three-position tilt adjustment, utilize a ratchet jack for the offset adjustment, and are Category I & II quick hitch compatible. Three models provide working widths from 72" to 96".









	4506	4507	4508	
HORSEPOWER REQUIRED	45 - 75 HP	50 - 75 HP	55 - 75 HP	
WORKING WIDTH	72"	84"	96"	
MOLDBOARD HEIGHT		17"		
WEIGHT	439 LBS	469 LBS	503 LBS	
ANGLE ADJUSTMENT		5 POSITION FORWARD & REVERSE		
TILT ADJUSTMENT	3 POSITION			
OFFSET ADJUSTMENT	RATCHET JACK			
A-FRAME MATERIAL	3/8"			
CUTTING EDGES	6"			
HITCH	CAT 1 & 2			
QH COMPATIBLE		YES		
WARRANTY		1 YEAR		



IronCraft's Standard-Duty Landscape Rakes work well for cleaning and preparing sites for seeding. They can spread rocks, move debris, and reshape soil. Designed for use by landscapers and contractors, they will meet the demands required for golf course maintenance, terracing hillsides, shaping run-off control ditches, and preparing areas for reforestation.











	5104	5105	5106	5107	5108
HORSEPOWER REQUIRED	15 - 45 HP	20 - 45 HP	25 - 45 HP	30 - 45 HP	35 - 45 HP
WORKING WIDTH	48"	60"	72"	84"	96"
TINES PER FOOT			6		
WEIGHT	158 LBS	180 LBS	229 LBS	251 LBS	285 LBS
ANGLE ADJUSTMENT	5 POSITION FORWARD & REVERSE				
A-FRAME MATERIAL	3/8"				
MAINFRAME	4" X 4" ANGLE				
HITCH	CAT 1				
QH COMPATIBLE	NO				
WARRANTY	1 YEAR				



The FMA125 is a chain drive tiller recommended for tractors ranging in horsepower from 13 to 25. It is designed for gardening and horticulture uses.



	FMA-125	
HORSEPOWER	13 - 25 HP	
TILLING WIDTH	49"	
OVERALL WIDTH	53"	
MAX WORKING DEPTH	4-3/4"	
HITCH	CAT 1 , 3-PT	
# OF FLANGES ON ROTOR	6	
# OF TINES PER FLANGE	4	
# OF TINES	24	
WEIGHT (WITHOUT PTO)	309 LBS	
PTO INPUT SPEED	540 RPM	
ROTOR TUBE DIAMETER	2"	
ROTOR SWING DIAMETER	12-1/2"	
WARRANTY	1 YEAR	









# UL SERIES



LIGHT-DUTY GEAR DRIVE TILLERS IRONCRAFT

The UL Rotary Tiller is suitable for tractors from 20 to 40 horsepower with a category 1 hitch. The UL models are light-duty and dependable, appropriate for gardening and horticulture.



HORSEPOWER   20 - 25 HP   25 - 40 HP		UL-48	UL-6U	
OVERALL WIDTH         53"         65"           MAX WORKING DEPTH         7"           HITCH         CAT 1, 3-PT           # OF FLANGES ON ROTOR         6         7           # OF TINES PER FLANGE         6         42           WEIGHT (WITHOUT PTO)         397 LBS         441 LBS           PTO INPUT SPEED         540 RPM           ROTOR TUBE DIAMETER         3"	HORSEPOWER	20 - 25 HP	25 - 40 HP	
MAX WORKING DEPTH         7"           HITCH         CAT 1, 3-PT           # OF FLANGES ON ROTOR         6         7           # OF TINES PER FLANGE         6         42           WEIGHT (WITHOUT PTO)         397 LBS         441 LBS           PTO INPUT SPEED         540 RPM           ROTOR TUBE DIAMETER         3"	TILLING WIDTH	48"	60"	
HITCH CAT 1, 3-PT  # OF FLANGES ON ROTOR 6 7  # OF TINES PER FLANGE 6  # OF TINES 36 42  WEIGHT (WITHOUT PTO) 397 LBS 441 LBS  PTO INPUT SPEED 540 RPM  ROTOR TUBE DIAMETER 3"	OVERALL WIDTH	53"	65"	
# OF FLANGES ON ROTOR 6 7  # OF TINES PER FLANGE 6  # OF TINES 36 42  WEIGHT (WITHOUT PTO) 397 LBS 441 LBS  PTO INPUT SPEED 540 RPM  ROTOR TUBE DIAMETER 3"	MAX WORKING DEPTH	7	""	
# OF TINES PER FLANGE 6  # OF TINES 36 42  WEIGHT (WITHOUT PTO) 397 LBS 441 LBS  PTO INPUT SPEED 540 RPM  ROTOR TUBE DIAMETER 3"	HITCH	CAT 1	, 3-PT	
# OF TINES 36 42  WEIGHT (WITHOUT PTO) 397 LBS 441 LBS  PTO INPUT SPEED 540 RPM  ROTOR TUBE DIAMETER 3"	# OF FLANGES ON ROTOR	6	7	
WEIGHT (WITHOUT PTO) 397 LBS 441 LBS  PTO INPUT SPEED 540 RPM  ROTOR TUBE DIAMETER 3"	# OF TINES PER FLANGE	6		
PTO INPUT SPEED 540 RPM  ROTOR TUBE DIAMETER 3"	# OF TINES	36	42	
ROTOR TUBE DIAMETER 3"	WEIGHT (WITHOUT PTO)	) 397 LBS 441 LBS		
	PTO INPUT SPEED	540 RPM		
	ROTOR TUBE DIAMETER	3"		
ROTOR SWING DIAMETER 15"	ROTOR SWING DIAMETER	15"		
WARRANTY 1 YEAR 1 YEAR	WARRANTY	1 YEAR	1 YEAR	










IronCraft's UM Rotary Tiller is medium-duty and dependable, able to work demanding soils like vineyards or orchards. The UM series is suitable for tractors from 25 to 50 horsepower with a category 1 hitch.



	UM-56	UM-72	
HORSEPOWER	25 - 50 HP		
TILLING WIDTH	60"	73"	
OVERALL WIDTH	65"	78"	
MAX WORKING DEPTH	7"		
HITCH	CAT 1, 3-PT		
# OF FLANGES ON ROTOR	7	9	
# OF TINES PER FLANGE	6		
# OF TINES	42	54	
WEIGHT (WITHOUT PTO)	578 LBS	684 LBS	
PTO INPUT SPEED	540 RPM		
ROTOR TUBE DIAMETER	3"		
ROTOR SWING DIAMETER	17"		
WARRANTY	1 YEAR		









# **UH SERIES**



### **HEAVY-DUTY ROTARY TILLERS**

The UH series is suitable for tractors from 50 to 65 hp with a Category 2 hitch. The UH models are heavy-duty and dependable, cutting through very demanding and stony soils.



	UH-60-R	UH-72-R	UH-84
PTO HORSEPOWER	40 - 55 HP	45 - 60 HP	50 - 65 HP
ROTATION	REVERSE		FORWARD
TILLING WIDTH	65	72	85"
MAX WORKING DEPTH	7-1/2"		8"
HITCH	CAT 1 & 2, 3-PT		
# OF FLANGES ON ROTOR	7	8	9
# OF TINES PER FLANGE	6		
# OF TINES	42	48	54
WEIGHT (WITHOUT PTO)	860	926	993 LBS
PTO INPUT SPEED	540 RPM		
ROTOR TUBE DIAMETER	3-1/2"		4"
ROTOR SWING DIAMETER	19"		
WARRANTY	1 YEAR		













The VH series is a suitable for tractors from 75 to 125 horsepower with category 2 or 3 hitch. The VH models are heavy-duty and dependable, cutting through very demanding and stony soils. The speed of the rotor can be adjusted.



	VH-90
HORSEPOWER	75 - 125 HP
TILLING WIDTH	90"
OVERALL WIDTH	95"
MAX WORKING DEPTH	9"
HITCH	CAT 2 OR 3, 3-PT
# OF FLANGES ON ROTOR	9
# OF TINES PER FLANGE	6
# OF TINES	54
WEIGHT (WITHOUT PTO)	1,557 LBS
PTO INPUT SPEED	540 RPM
ROTOR TUBE DIAMETER	3-1/2"
ROTOR SWING DIAMETER	17"
WARRANTY	1 YEAR











# 中 7100 SERIES

# ANGLE FRAME DISC HARROW

IronCraft's angle frame disc harrows feature notched discs designed to open and break up the soil surface for prepping seedbeds for planting. They are designed for use in residential landscaping, small gardens, nurseries, hobby farms, and wild game food plots.



	7112	7116
HORSEPOWER	20 - 30 HP	25 - 40 HP
WIDTH	48"	60"
WEIGHT	391 LBS	502 LBS
NUMBER OF DISC BLADES	12	16
DISC BLADE SIZE	16"	
DISC BLADE SPACING	7-1/2"	
BEARINGS	CAST	
HITCH	CAT 1	
QH COMPATIBLE	YES	
WARRANTY	1 YEAR	







# **7300 SERIES**



# **TUBE FRAME DISC HARROW**

	7316	7320	7324
HORSEPOWER	30 - 45 HP	35 - 45 HP	40 - 50 HP
WIDTH	60"	72"	84"
WEIGHT	650 LBS	700 LBS	750 LBS
NUMBER OF DISC BLADES	16	20	24
DISC BLADE SIZE	18"		
DISC BLADE SPACING	7-1/2"		
BEARINGS	SEALED		
HITCH	CAT 1		
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		

These Tube Frame Disc Harrows are for medium-duty usage with notched discs which easily break up and redistribute cultivated topsoil. They will easily meet the needs of commercial landscapers, larger nurseries and gardens, as well as small farms.













# 7400 SERIES

# **HEAVY-DUTY TUBING DISC HARROW**

Available in 3 different sizes, the 7400 Series heavy-duty tube frame disc harrow will work with tractors ranging in horsepower from 35 to 80. They will break up soil easily and redistribute cultivated topsoil. The harrows are a great choice for commercial landscapers, farms, ranches, and construction applications.













	7416	7420	7424
HORSEPOWER	35 - 60 HP	50 - 70 HP	60 - 80 HP
WIDTH	72"	92"	108"
WEIGHT	872 LBS	1,019 LBS	1,250 LBS
NUMBER OF DISC BLADES	16	20	24
DISC BLADE SIZE	20"		
DISC BLADE SPACING	9"		
BEARINGS	SEALED		
HITCH	CAT 1 CAT 1 & 2		CAT 1 & 2
QH COMPATIBLE	YES		
WARRANTY	1 YEAR		



With a choice of one-bottom or two-bottom, IronCraft's Moldboard Plows is a basic moldboard plow, best suited for gardens, nurseries, hobby farms, and wild game food plots. They are designed to turn over and aerate the soil for primary tillage, as well as bury residue and for tractors ranging in horsepower from 18 to 50.


#### COLOR OPTIONS



### **KEY FEATURES**

AVAILABLE IN 12", 14", OR 16"

REPLACEABLE SHARE & MOLDBOARD

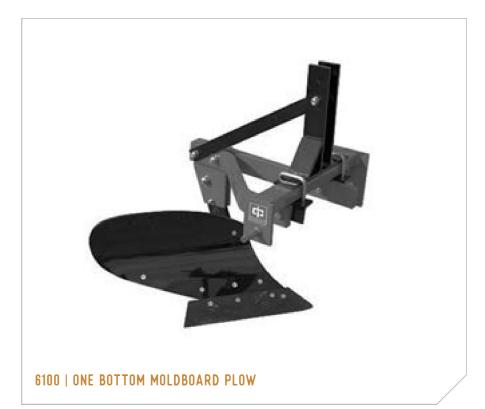



# 8100 SERIES





The 8100 effectively perforates the ground to better accept air, sunlight, water, and nutrients into the soil. Each aerator spike is approximately 2-3/4 long and 2' wide at maximum depth. The depth and width of the hole can be controlled in three ways: by using just the weight of the aerator frame, by adding water to the 12-inch drum, and/or by stacking 16-inch blocks on top of the frame. Spike aerators, over plug aerators, have a less aggressive impact on the lawn and can be used throughout the year.









	8104	8105	8106	8107
WIDTH	48"	60"	72"	84"
HITCH TYPE		3-PT,	CAT 1	
QH COMPATIBLE	YES			
WEIGHT EMPTY	295 LBS	338 LBS	382 LBS	427 LBS
WEIGHT FILLED	505 LBS	601 LBS	698 LBS	787 LBS
WARRANTY	1 YEAR			

# 8200 SERIES

**CORE PLUG AERATORS** 



Core plug holes provide the plant roots with better access to oxygen and improves the ability of the soil to hold water which could run off on non-aerated ground. These holes guide water and nutrients deep into the ground to reach the plant roots. With four models, you can size your aerator by the acreage being conditioned or by the size of your tractor. Models are available to aerate anything from a homeowner's lawn to an athletic field, municipal golf course, or farming application.











	8204	8205	8206	8207
WIDTH	48"	60"	72"	84"
HITCH TYPE QH		3-PT,	CAT 1	
COMPATIBLE	YES			
WEIGHT EMPTY	367 LBS	429 LBS	490 LBS	551 LBS
WEIGHT FILLED	577 LBS	692 LBS	806 LBS	922 LBS
WARRANTY		1 YF	EAR	



The 9300BP Heavy-Duty Boom Pole is a lifting tool ideal for any farm or ranch. With a lift capacity of 1500 lbs., this versatile tool can lift heavy farming equipment, logs, car and truck engines, and much more. It has a welded lifting loop, and is Category l and ll quick hitch compatible for maximum versatility.



KEY FEATURES
1500 LBS CAPACITY
CAT 1/2 HITCH
TUBE FRAME



# 9300 BU BALE UNROLLER



The 9300BU Bale Unroller makes quick work of lifting, transporting, and unrolling round bales in farming and ranching operations. It is built to give you years of reliable performance, and is designed to work with 25 to 65 hp tractors. The bale unroller can handle bales up to 2,200 lbs. in widths of 4, 5, and 6 feet. It comes equipped with a storage stand and is category l and ll quick hitch compatible.











	KEY FEATURES
HORSEPOWER	25 - 65 HP
WEIGHT	375 LBS
MAX LIFTING CAPACITY	2200 LBS
CYLINDER	STANDARD
HOSES	STANDARD
BALE WIDTH	ADJUSTABLE 4', 5', OR 6'
HITCH	CAT 1 & 2
QH COMPATIBLE	YES
WARRANTY	1 YEAR



This utility sized auger will bore holes of 6", 9" or 12' diameter up to 45" deep. Strong and durable construction makes digging post holes for fence posts, or any number of other uses fast and easy. Our shear bolt driveline protection helps prevent equipment damage when unexpectedly contacting an immovable object. Our unit can operate on a variety of tractors within the 25 to 65 PTO horsepower range. Compatible with most Cat 1 and 2 three-point tractor hitches. The steel auger has replaceable, bolt-on cutting edges to maintain productive boring speeds throughout the life of the post hole digger.









	PHD	
DESCRIPTION	STANDARD DUTY	
TRACTOR CATEGORY	CAT 1 & 2	
GEARBOX	3:1 RATION, 2" OUTPUT SHAFT	
DRIVELINE	YOKE TS 6-SPLINE PTO	
AUGER DIAMETER	6", 9", 12"	
BOOM	2-7/8' O.D. TUBING	
A-FRAME	2-7/8' O.D. TUBING	
OPTIONS	265 LBS	
SHIPPING WEIGHT	265 LBS	
WARRANTY	2 YEAR LIMITED	
SAFETY SHIELDS	ON DRIVELINE, GEARBOX "U" JOINT, AND GEARBOX OUTPUT SHAFT	
SHEAR BOLT	REPLACEABLE, ON INPUT SHAFT, TO PROTECT DRIVELINE, AUGER AND GEARS	









Our Cat 1 & 2 Quick Hitch adapters make your day more efficient by being able to quickly switch from one attachment to another. Reduce attachment or release time to seconds versus minutes with this quick hitch system. Recommended for tractors of 50 horsepower, it works with all Cat 1 or 2 IronCraft products, including PTO driven attachments. The quick hitch comes with a set of adapter bushing to properly connect attachments to the hitch. Locking handles are aspiring loaded keeping the attachment securely fastened to the adapter. Top link height is adjustable, if necessary, to accommodate a wide variety of attachments.



	QUICK HITCH
HITCH CATEGORY	1 OR 2
DIMENSIONS (L X W X H)	30" X 8" X 24"
WEIGHT	68 LBS
MAX LIFTING CAPACITY	880 LBS
WARRANTY	1 YEAR



Introducing the Ironcraft 9510P and 9520P spreaders, your perfect tool for fertilizer spreading. This top-of-the-line spreader is equipped with a steel conical hopper and can handle granular or crystalline fertilizers with ease.


The 9510P spreader features a four or six fins spreading disc, which allows for even distribution of fertilizer across your fields. Don't settle for less when it comes to fertilizer spreading choose the Ironcraft 9510P for unparalleled performance and reliability.





	9510P	952OP
CAPACITY	441 lbs	992 lbs
WEIGHT	119 lbs	139 lbs
DIMENSIONS	37.4 in x 37.4 in x 37.4 in	43.7 in x 43.7 in x 46 in
SPREAD	26.5-46 ft	26.5-46 ft
HORSEPOWER	20 HP	20 HP



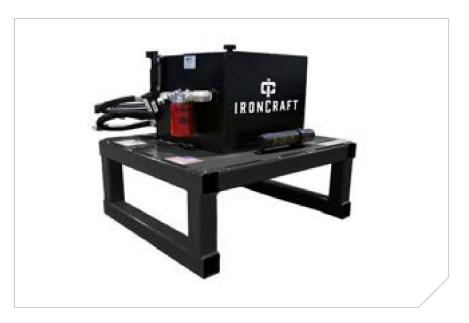

Introducing the Ironcraft Auxillary PTO Hydraulic Kit! This kit is packed with features to give you the power and control you need to tackle any job with ease.

The kit comes with a 20-gallon reservoir tank that ensures you have enough hydraulic fluid for extended periods of use. The oil sight and temperature gauge on the reservoir makes it easy to monitor the fluid levels and temperature, ensuring that the system is always running at optimal performance.

	IC-AUXKIT
FLOW (GPM)	11.4 GPM
RESERVOIR TANK	20 Gallon
WEIGHT	400 lbs (when filled)




# **4-N-1 Buckets** CT4N1-60, CT4N1-66, CT4N1-72 SD4N1-72



The IronCraft 4-N-1 Buckets are versatile attachments for your skid steer. These attachments are ideal for grappling, dozing, backfilling, loading, digging and fine grading.

The cylinders on our compact tractor 4-N-1 Buckets have a 2" bore, and our Standard Duty 4-N-1 Buckets have a 2.5" bore. The 4-N-1 Buckets are equipped with a 1/2" x 6" cutting edges and 1/2" x 4" at all other engaging points. The 4-N-1 Buckets are built with top quality steel, oversized pins and bushings, with grease fittings at every pivot point. Every unit exceeds the lifting capacity of the skid steer machine it is used on.

- 2" cylinders on compact tractor
- 2.5" cylinders on standard duty and heavy duty
- Grease fittings at every pivot point
- · Optional weld on teeth
- Optional bolt on edge (HD)
- Optional side cutter (HD)
- Compact Tractor sizes: 60",66", 72" (under 40 hp)
- Standard Duty sizes: 72" (40 50 hp)

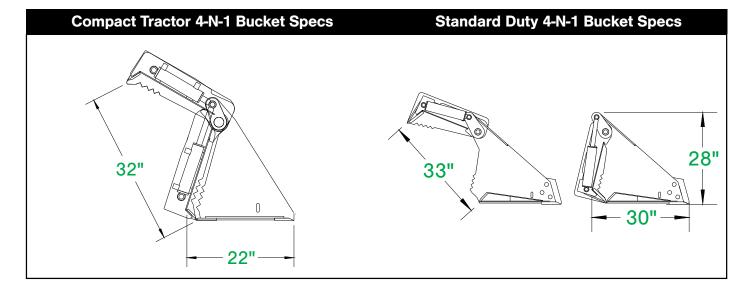

# Heavy Duty Buckets SNLB66 & SNLB72


### **Snow & Litter Bucket**

The Heavy Duty Snow & Litter Bucket is ideal for lifting large volume, low weight material such as snow, mulch, manure, sawdust, shavings and any other type of loose or light debris. Its made for up to 65 HP track machines and up to 70 HP on wheel machines.

#### Available sizes:

66", 72"

- Designed for large volume, low weight material
- 3/16" bucket wrap
- 3/4" x 6" edge
- 3/8" wear bars & side e

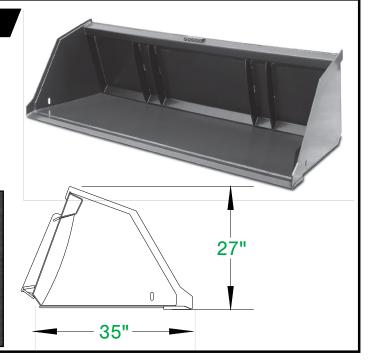


PRICING PAGE #10-11

# Compact Tractor / Heavy Duty CTRAC66, CTRAC72, TRAC72, TRAC78



Our tractor buckets are designed with higher backs to prevent material from spilling over. They feature 3/16" steel sides and a 3/4" x 6" cutting edge. These buckets also come with holes in the sides for mounting a tooth bar and will hookup using universal Skid Steer and many tractor styles quick attach.

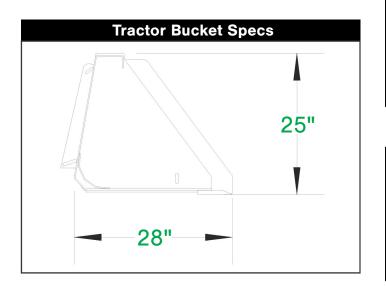

#### **Heavy Duty Tractor Buckets 45 HP to 65 HP**

- Higher back to prevent spillage
- Available sizes: 72", 78", 84"
- Universal Skid Steer and many tractor style quick attach
- Features 3/16" Steel Sides and a 3/4" x 6" Cutting Edge
- X-treme Duty package offered (1/4" wrap 1" x
   8" edge) 1/2" side edge & wear bars

#### Compact Tractor Buckets 45hp and Under

- Higher back to prevent spillage
- Available sizes: 66", 72"

Universal Skid Steer and many tractor styles

quick attach

• Features 3/16" Steel Sides and a 1/2" x 4" Cutting Edge



# X-treme Tractor Bucket XTRAC84



X-treme Tractor Bucket Specs

29"

The X-treme tractor bucket was designed for tractors with horse power of 65 and up. With a deep floor and a tall back this bucket has an oversized capacity. Rolled back makes for easy cleanout.


- Higher back to prevent spillage
- Available sizes: 84"
- Universal Skid Steer and many tractor styles quick attach
- Features 3/16" Steel Sides and a 3/4" x 6" Cutting Edge
- Optional bolt on edge

# Rock Bucket CTRB48, CTRB60, CTRB66, CTRB72, SDVTRB72, SDVTRB78



- Compact Tractor: 1/2" tine thickness, 2 3/4" spacing
- Compact Tractor rated for machines under 35 HP
- Compact available sizes: 48", 60", 66", 72"
- Standard Duty: 3/8" tine thickness, 3" spacing
- Standard Duty rated for machines 35-45 HP
- · Standard available sizes: 72", 78"

The IronCraft Compact Tractor and Standard Duty Rock Buckets offer a similar design to our X-treme version, but in a stepped down size for smaller machines. Easily sift through loose soil to remove unwanted rock and debris.

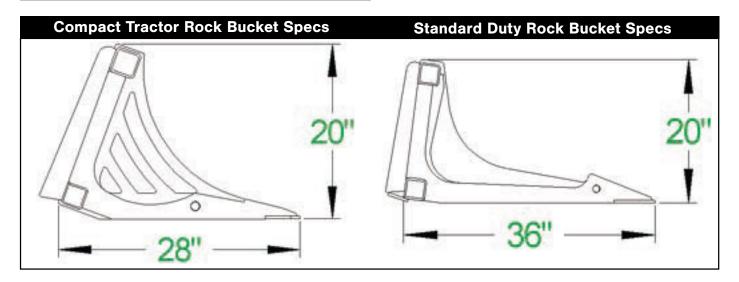


# Rock Grapple CTROKG60, CTROKG66, CTROKG72, SDROKGVT72, SDROKGVT78





The IronCraft Rock Grapples are great for sifting through dirt in order to remove rocks and debris. Our Compact Tractor Rock Grapple comes with a single grapple, and works with 45 or less HP machines. The Standard Rock Grapple has dual cylinders and works with 45-60 HP machines.

- Features 2" bore by 10" stroke cylinders
- Welded Front Teeth
- Compact Sizes available: 60", 66", 72"
- Standard Sizes available: 72", 78"

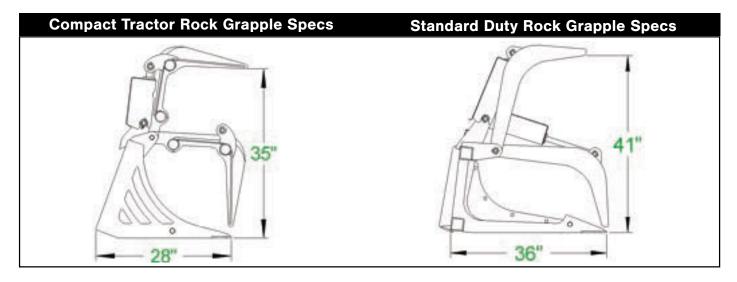

# Root Grapples - SERG48, SERG60, SERG66, SERG72, ERG60, ERG66, ERG72, ERG78

### **Economy Root Grapples**

Single Cylinder

Our economy single and dual cylinder grapples are ideal for moving small logs, brush, rocks, or just about any type of debris - leaving the dirt behind. The economy dual cylinder grapple is designed for tractors, allowing owners to get the full potential from their tractors. Dual grapples allow the operator the ability to handle uneven and odd-shaped material.


They come standard with twin 2" bore by 8" stroke cylinders, and are available in 60", 66", 72", and 78" widths. The Economy Root Grapple opens

- Designed for tractors up to 45hp
- 2" x 8" stroke cylinders
- Available sizes: 60", 66", 72", 78"
- 48" size is available for single cylinder SERG units.



# **Industrial Root Grapple**

# IRG66, IRG72, IRG78

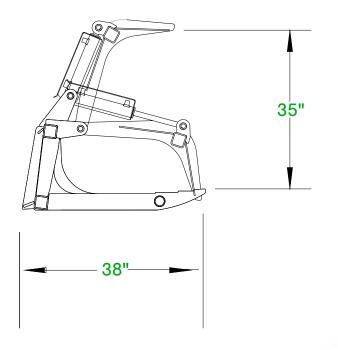

- Recommended machine size: 45HP to 65HP
- 2" bore by 10" stroke cylinders
- Hydraulic lines routed inside the tubing to prevent tears
- Available sizes: 66", 72", 78"

The Industrial Root Grapple is the grapple of choice for those who need an attachment that will hold up in severe applications. It can handle more material and is more rugged that our other grapples. It's built from 1/2" thick steel plate on the top and bottom, and incorporates 4" square tubing.






# X-Treme Root Grapples XRG72, XRG78, XRG84

## X-treme Root Grapple

The X-treme Root Grapple is the grapple of choice for those who need an attachment that will hold up in severe applications. It can handle more material and is more rugged that our other grapples. It's built from 5/8" thick steel plate on the top, 1/2" on bottom, and incorporates 4" square tubing. It also features enclosed hydraulic cylinders and shafts.



- Recommended machine size: 65 HP and above
- 2" bore by 10" stroke cylinders
- Hydraulic lines routed inside the tubing to prevent tears
- Available sizes: 72", 78", 84"





## **Grapple Rakes Compact Tractor / Economy / Standard**


Our Grapple Rakes are ideal for raking and loading debris. The shape of the grapple makes it easy to roll debris into tight places. We use American made cylinders, rated at 4,000 psi, to handle the toughest jobs.


- Unique design makes it easy to roll debris into tight piles
- Compact Tractor Sizes: 48", 60", 66"
- Compact Tractor Dual Cylinder sizes: 60", 66"
- Economy sizes: 66", 72"
- Standard Duty sizes: 66", 72"

### Compact Tractor Grapple Rake

Our Compact Tractor Grapple Rake is for use on tractors less than 40 HP. The Compact Tractor Grapple Rake is built heavy enough for rigorous use, but light enough for compact tractors. The Compact version is available in a single cylinder grapple 2x6 (48", 60", 66") or a dual cylinder grapples 2x6 (60", 66").

CTGR48, CTGR60, CTGR66 CTGRDC60, CTGRDC66





**Dual Cylinder** 

Opening Height of 33"

Single Cylinder

Opening Height of 42"

## **Economy Grapple Rake**

Our Economy Grapple Rakes come in 66 or 72 and are rated for machines up to 45 HP. The Economy Grapple Rakes are built with top quality steel and are ready to tackle the toughest jobs with an opening height of 42-3/16".


**EGR66, EGR72** 



## Standard Grapple Rake

Our re-designed Standard Duty Grapple Rakes are constructed from 3/8 AR400 Steel, and are rated for machines with 35-60 HP. The new design provides more strength, combined with a lower weight to maximize your grappling power.

ARSGR66, ARSGR72





PRICING PAGE #15 59 OF 81

# **Grapple Rakes**


XGRT72, XGRT78, XGRT84

X-treme Grapple Rake



Our X-treme Grapple Rakes are ideal for raking up debris. The grapples can then be used to load the debris into a dump truck. The shape of the grapple rake makes it easy to roll debris into tight piles if you are planning to burn. We use twin 2" bore by 10" stroke cylinders, rated at 4,000 psi to handle the toughest jobs. Our X-treme Grapple Rakes are built with 1/2" top quality steel and come standard with 23 series teeth. Our X-treme Grapple Rakes have a full 51" opening. The X-treme is rated for 65+ HP machines.

- · Available as a single grapple
- Twin 2" bore by 10" stroke cylinders
- Unique design makes it easy to roll debris into tight piles
- X-treme sizes: 72", 78", 84"

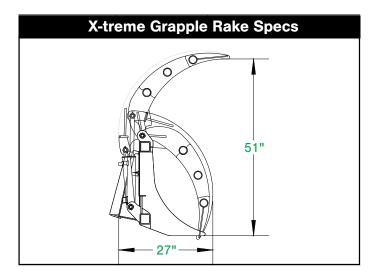


# Hay Bale Equipment XBS, HDBS, DHBABS

### X-treme Hay Bale Squeezer

Our X-treme Bale Squeezer is great for anyone moving and stacking large quantities of hay. It features twin 2 1/2" x 8" cylinders with a holding capacity of 2,800 lbs. This attachment can also stack two bales at a time and handles 4, 5 or 6 foot bales.



- Twin 2 1/2X8 Cylinders
- 2800Lb Holding Capacity
- Will Lift 4',5', And 6' Bales




### **Heavy Duty Bale Squeezer**

Easily grab and transport round bales with our heavy duty bale squeezer. You capick up bales sitting flat or on their side. The tubular design allows wrapped bales to be transported without tearing the plastic. The single cylinder design allows this attachment to b very economical



- Pick up bales sitting flat or on their side
- Single cylinder
- Very economical
- •65 hp and under
- 1800 LB Holding Capacity




### **Double Adjustable Bale Spear**

Our Double Adjustable Bale Spear is very useful around the farm. It can be adjusted to pick up 2, 4, 5, and 6 foot bales of hay, and is rated at 2,800 lbs. per spear.



- · 2800Lb lifting capacity
- Designed to pick up 2- 4',5',and 6' bales
- Spears are adjustable

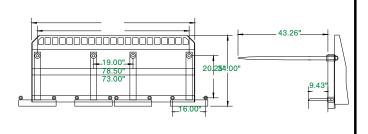


# **Low Back Hay Spears**

Our Hay Spear is an excellent piece of equipment to have on the farm. Easily move bales of hay with a quick hook up on your skid steer or tractor. The Hay Spear is rated at 2,800 lbs. The selection will be a fixed spacing, non-adjustable. Euro Style and John Deere mounts are available.



- 2,800 lb weight rating
- Euro style and John Deere mounts available
- Spear length 48" overall

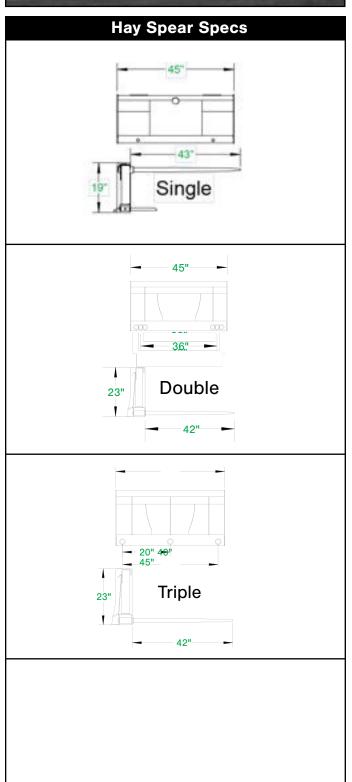

PRICING PAGE #20

# **High Back Hay Spears**



Double High Back Hay Spear




Triple High Back Hay Spear THBHS



Our High Back Hay Spear is designed to increase your leverage and safety when rolling the bales back towards the cab. Hay Spears easily move bales of hay with a quick hook up on your skid steer or tractor.

- 2,800 lb weight rating
- Euro Style and John Deere mounts available
- High back increases leverage and safety

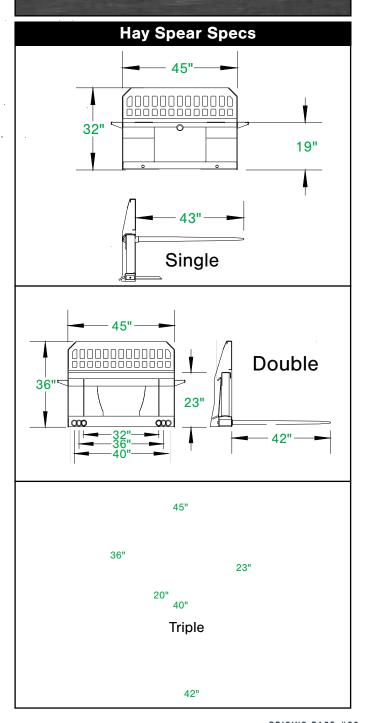


# Hay Grapple Bucket HBGB84, HBGB96



Our Hay Grapple Bucket is a large capacity bucket with a grapple. Used for gathering broken bales of hay, straw, silage and other light material.

- 1/4 wrap , 3/4 x 6 cutting edge
   2 x 10 cylinders Grease fittings at every hinge point
- Available in 84" & 96"

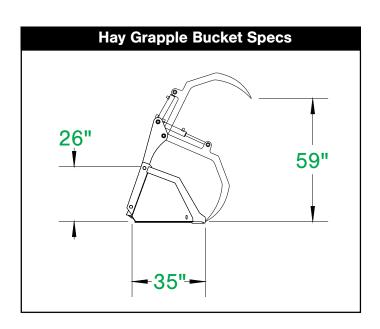


# Hay Accumulator Grapple HAG10



The Accumulator Grapple allows one man and a skid steer to gather 8 to 10 square bales, grapple them, lift and off load to a trailer. No need for multiple pieces of equipment, this is all operated from inside the skid steer using the Accumulator Grapple.

- 2 x 6 cylinder
- 9" grapple hooks
- Radial bearings
- 10 bale capacity
- Adjustable width sides

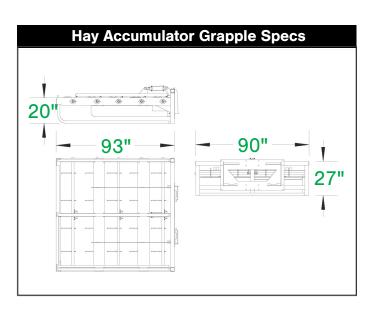


# Manure Forks CTMF72, XMF84

These forks are useful for manure and general pick up of materials when you only want to pick up the item and not the soil around it. The tines slide in through the front and are pinned from the rear.



- Recommended for machines under 55 HP
- 1-1/2" cold rolled steel tines
- Available sizes: 72"

- Strong 2" cold rolled steel tines
- Available sizes: 84"
- Recommended for machines above 55 HP

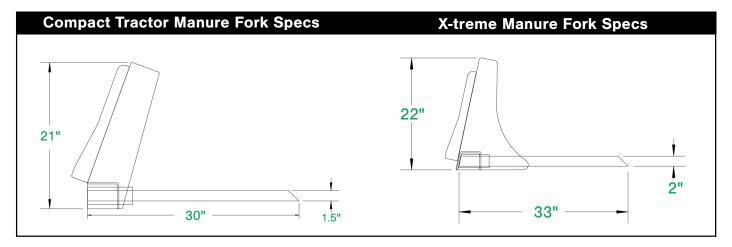


# **Sub-Compact Pallet Forks & Frame SCTFF**



The IronCraft Sub-Compact Pallet Forks are ideal for machines with limited lifting capacity. Similar to our compact tractor pallet forks, but using a class 1 fork to remove additional weight, without compromising strength. Fork tines come in 42" lengths.

- 3/8" Formed top slide
- 2" x 3/8" Center slide support
- Open flat bar grill
- 1000 lb. load capacity

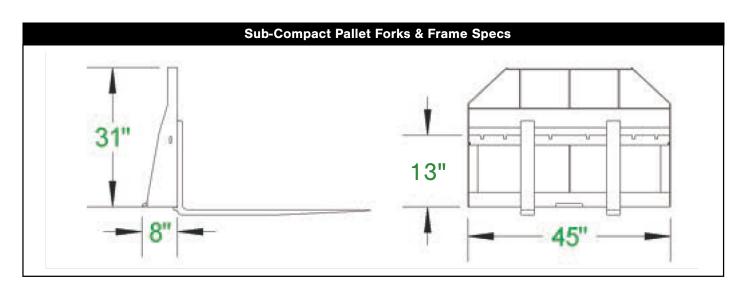

### **Pallet Forks & Frame**

#### **CTFF**

#### **Compact Tractor Pallet Forks & Frame**

# IronCraft Compact Tractor pallet forks are designed specifically for compact tractors. Our lightweight frame offers a 2000 load capacity. Fork tines are 1 3/16" thick, 3" wide, and available in 48" lengths. Hooking up is fast and convenient, and our see-through visibility makes tine placement easy.

### **SDFF**

### **Standard Duty Pallet Forks & Frame**


Anyone that owns a skid steer should have a set of forks on hand. Forks are ideal for lifting pallets, loading lumber or just about anything else. Our forks are 1–1/4 inches thick, 4 inches wide and 42 inches long. They are completely heat treated and rated to carry 4,000 lbs. We put a step on both sides of our frames so the operator can easily climb into the cab. Euro Style and John Deere mounts are available.





- · 2000 lb. load capacity
- 48" tines available
- · John Deere mounts are available

- Rated to carry 4,000 lbs.
- Steps on both sides of frame
- · Euro style and John Deere mounts available
- 48" tines available

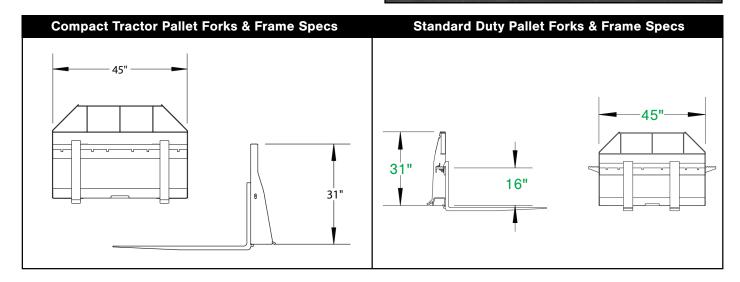


# Heavy Duty Pallet Forks & Frame HDFF





Anyone that owns a skid steer should have a set of forks on hand. Forks are ideal for lifting pallets, loading lumber or just about anything else. Our forks are completely heat treated and rated to carry 4,000 lbs. We put a step on both sides of our frames so the operator can easily climb into the cab. Euro Style and John Deere mounts are available.

- Rated to carry 4,000 lbs.
- · Steps on both sides of frame
- Euro style and John Deere mounts available
- 48" tines

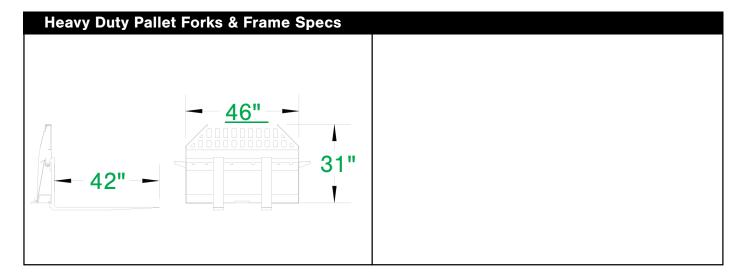

# **Skid Steer Conversion** QTSS, JD234TSS, JD500TSS, SSTQ

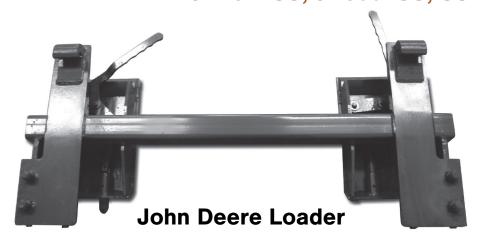

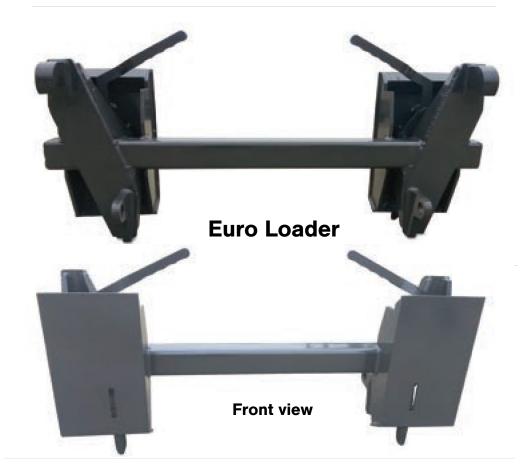

### **Snow Plow**

CTSPLOW72, CTSPLOW84, CTSPLOWM60, CTSPLOWM72, HDSPLOW72, HDSPLOW84, HDSPLOW96, HDSPLOW108




Our Compact Tractor Snow Plow allows you to quickly clear driveways and parking lots. This plow is designed for compact tractors under 45 HP. Easily angle the plow with the 2" x 6" hydraulic cylinder.


- Designed for compact tractors
- · Available in manual angle
- 2" x 6" hydraulic cylinder
- Available sizes: 60", 72", 84"
- Angles to 30 degrees both ways



Our Heavy Duty Snow Plow is the same basic design of our X-treme Snow plow but without the extra roll top. This design allows the operator to have better visibility while plowing.

- Easily angle the plow from inside the cab
- 3" x 6" hydraulic cylinder
- 1/2" AR400 bolt on cutting edge
- Adjustable skid shoe
- Available sizes: 72", 84", 96", 108"
- Angles to 30 degrees both ways

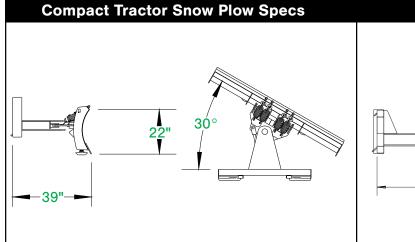



## **Snow Pushers**


### **Compact Tractor Snow Pusher**

Our Compact Tractor Snow pusher is a smaller version of our full size pusher, allowing you to get to areas a large machine could not reach. The low profile design offers greater visibility for small tractors and mini skid steers. Available in 48", 60", 72", and 84" sizes

CTSPUSH48 CTSPUSH60 CTSPUSH72 CTSPUSH84



- 1-1/2" x 8" replaceable rubber edge
- 1/2" AR400 replaceable shoes
- 5/16" sides
- Optional pull back

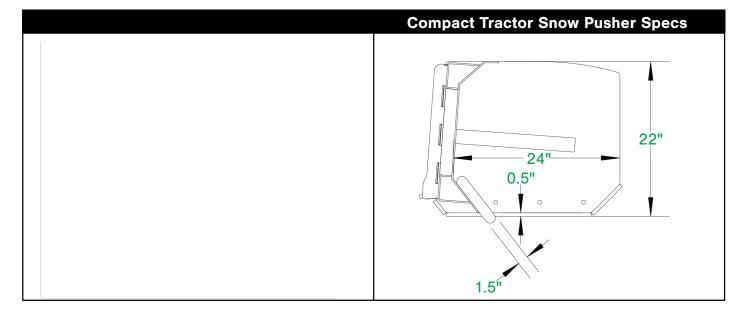

# Universal Skid Steer Quick Attach QAPLT, QAPLT3/8

With the IronCraft Universal Skid Steer Quick Attach plate, you can easily convert your existing attachment to the universal skid steer hook up. Simply weld or bolt the quick attach plate to the implement you wish to convert. Our standard quick attach steel plates are 1/4" thick and are solid across the back. We can also make the steel plates thicker for different applications.



3/8" available


73 OF 81 PRICING PAGE #27

## Tree & Post Puller TPP



This versatile puller will pull posts up to 8" in diameter and trees up to 6" in diameter. It allows you to pull up unwanted trees and shrubs without having to dig around the roots.

- Pull posts up to 8" in diameter and trees up to 6" in diameter
- 2-1/2" x 8" cylinder

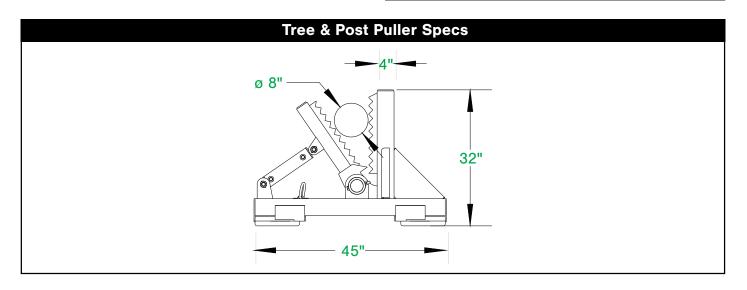

74 OF 81 PRICING PAGE #28




## Stump Buckets SB

## **Heavy Duty Stump Bucket**

The Heavy Duty Stump Bucket is an excellent addition to your skid steer attachments. Easily dig around the stump, and then pop it out. We have even had contractors dig house footings with the stump bucket. These stump buckets will enable you to be more versatile in your contracting needs. The Heavy Duty Stump Bucket is designed for machines with HP of 65 or below.



- Great for stump removal and digging footings
- 3/8" sides 3/4" x 6" edge
- 3" x 3/8" Wear bars

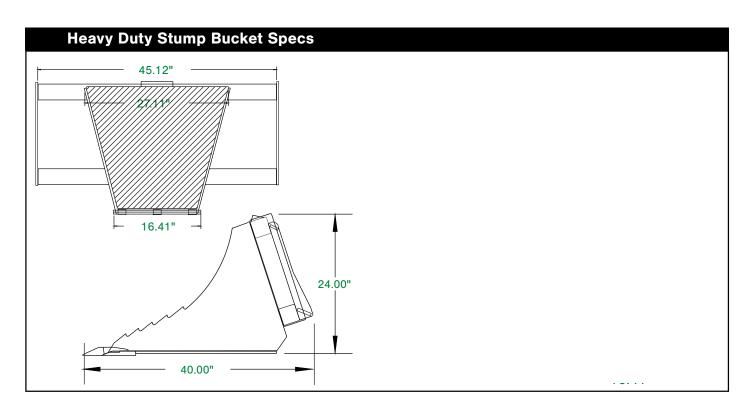




## Standard Duty Brush Cutters SBC60, SBC72



## Standard Low Flow Brush Cutter 14 – 20 GPM

- 3" cutting capacity
- 3/16" deck with 3/8" A36 reinforced sides
- 40HP right angle gear box
- 2 blades with stump jumper
- · High torque motor with built in relief valve
- · Does not require a case drain

Our Standard Duty Brush Cutter comes with a 60" or 72" mowing deck. It features 2 blades, a 40HP gear box and stump jumper. A flow of 11–20 gpm is required. Optional mesh grill available on open front. The one year warranty does not cover the blades or hoses. (Please see page 95 of the catalog for full warranty).

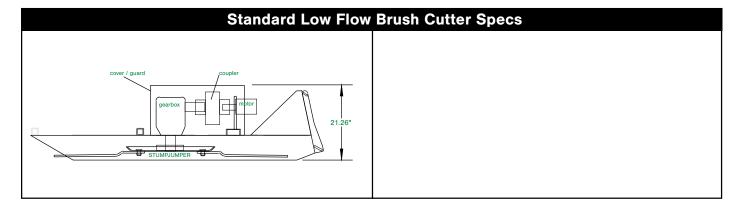

76 OF 81 PRICING PAGE #4



IronCraft snowblowers are designed with a durable performance and high capacity design to easily catapult snow away from driveways, parking lots and roads. The IronCraft Snow Cannon has three choices of widths ranging in required horsepower from 15-50.

### **OUICK FEATURES**

- 3 Point Hitch / Quick Hitch compatible.
- Welded Augers with High Tensile Steel Ribbon Flighting
- Five blade fan evacuates high volumes of snow quickly, and adds tighter tolerance to the housing.
- Heavy-duty gear box.
- Manual Pin-Style Deflector to set it and forget it.
- Adjustable skid shoes to extend cutting edge life.



### HIGH TENSILE STEEL RIBBON FLIGHTING

To deliver even the heaviest wet snow to the awaiting fan, IronCraft Snow Cannons use machine formed hand welded augers made with high tensile steel ribbon flighting to provide strength and durability for years to come.



### MANUAL DEFLECTOR

All IronCraft Snow Cannons come with a manual pin style deflector allowing a true set it and forget it approach to blowing snow.



### 3PT/OUICK ATTACH


All single auger PTO driven models are built for Category 1 or Category 2 type 3PH. All models are Quick Attach Compatible.

	SCS-54"	SCS-68"	SCS-78"
TRACTOR HP	15 HP	30 HP	50 HP
WORKING WIDTH	54 in	68 in	78 in
CHUTE ROTATION	Manual	Manual	Manual / Hydraulic
TPL MOUNT	Cat 1	Cat 1	Cat 1 & 2
WEIGHT	366 lbs	506 lbs	748 lbs



### SKID SHOES & RAILS

IronCraft Snow Cannons come equipped with adjustable skid shoes extending the life of the cutting edge and helping to protect surfaces from damage commonly associated with snow removal.



### FIVE BLADE FAN

All IronCraft Snow Cannons now feature a standard 5 blade fan. The five blades not only evacuate high volumes of snow quickly, but also feature tighter tolerance to the housing increasing velocity of the snow exiting the chute.



### WING BITS

Heavy Duty Wing Bits increase the width of the Snow Cannon for more snow processing.



### **GEAR BOX**

Heavy Duty gear boxes transfer the power from the tractor into the driveline of the Snow Cannon, ensuring consistent power input to the auger and fan assemblies.



### MANUAL ROTATOR

Manual rotators are standard on all IronCraft Snow Cannons and can be optionally outfitted on most models where operators can safely reach the adjustment handle.

### OPTIONAL UPGRADE

### HYDRAULIC ROTATOR

Choose an optional hydraulic rotator upgrade for a hands-off approach to chute rotation.

An optional hydraulic rotator is the ideal upgrade for tractors with cabs or operators making frequent adjustments.





## Warranty

### LIMITED WARRANTY

IronCraft products are warranted to be free from defects in workmanship or materials for a period of (12) months from initial sale, lease or rental date.

### FORESTRY DISC MULCHER

For more info on our disc warranty please refer to our disc operating manual. For warranty info on all other components on the forestry disc mulcher please refer to the IronCraft operator's manual.

### **NON-COVERED ITEMS**

- This warranty does not cover normal wear items, including but not limited to, bearings, hoses, ground engaging parts such as, teeth, blades, cutting edges, pilot bits, auger teeth and broom bristles.
- This warranty does not cover maintenance, service or adjustments.
- This warranty does not cover damage due to misuse, negligence, accidents, or improper maintenance.
- This warranty does not cover damage due to improper application, installation, adjustment or setup.
- This warranty does not cover improper modifications of product.
- This warranty is void if any components have been disassembled, i.e. pumps, gear boxes, motors.
- Specially modified attachments built by IronCraft Attachments to meet your customer's needs shall not be warrantied by Construction Implements Depot, Inc.
- This warranty does not cover replacement parts not supplied by CID, Inc.

### **WARRANTY STATEMENT**

Our obligation under this Limited Warranty shall be solely limited to repairing or replacing any part (see non-covered items) free of charge that, according to our judgment, shows evidence of a defect in quality of workmanship or materials for the stated (12) month warranty period. All defective parts must be routed directly to IronCraft with freight or delivery charges to be prepaid. This Limited Warranty shall not be interpreted to render IronCraft liable for any injury or damage to persons, business or property of any kind nor expenses or losses incurred for labor, supplies, substitute machinery rental, or for any other reason. Repair or replacement parts are subject to the supply conditions at the time of repair or replacement, which may directly affect our ability to obtain material and/or replacements parts. IronCraft reserves the right to make improvements in design or changes in specifications at any time without incurring any obligations to owners of previously purchased units. No one but IronCraft is allowed to alter, modify or enlarge this warranty nor the exclusions, limitation and reservation at any time.

77 OF 81 PRICING PAGE #28

## **Warranty Service**

### **Procedures for Obtaining Warranty Service**

RGA (Returning Goods Authorization) Policy:

If repairs are required, IronCraft must obtain a RGA number from the Manufacturer of the defective part and proof of purchase. RGA and services are rendered by IronCraft only. Any responsibility of shipping costs on any item returned for repair is at the discretion of IronCraft . All returned parts must have a RGA number written clearly on the outside of the package along with a Service Request Form and the defective part. No COD packages will be accepted. No package will be accepted without a RGA number written on the outside of the package. RGA numbers are only valid for 30 days from the date of issue. All replacement parts shipped out will need a PO# from the original IronCraft customer. If the Defective part is rendered non-warranty the PO# will be invoiced for the replacement part.. Should you have any problems with your Attachments, please follow these procedures to obtain the service:

- 1. Call the Warranty Department (336) 859-2002 ext 215. Photo's serial and model #'s of the attachment and parts in question will need to be obtained with a description of the problem.
- 2. Upon a warranted issue Go to ironcraftattachments.com, click on the warranty tab and fill in the warranty claim form. IronCraft will retain a RGA# from the manufacturer of the defective part. If all information above is fulfilled the manufacturer will issue a RGA#
- 3. A PO# is required from the original IronCraft customer. PO#'s will only be invoiced in the event that the defective part is un-warranted.
- 4. IronCraft will ship a replacement part with a service request form and RGA #. There will be a call tag with the Manufactures address and instructions for returning the defective part.
- 5. Once the defective part is warranted by the manufacturer. IronCraft will be issued a credit and the PO# will be void. If the manufacturer finds that the defective part is not warranted the PO# will be invoiced for the replacement part.
- 6. In the event that renders the attachment be returned to IronCraft for repair, IronCraft will make arrangements for pick up and return. Repairs will be performed by IronCraft qualified technicians. Non-warranted issues will be discussed and repairs will be performed upon agreement of the owner, and payment for parts and labor will be issued.

## **NOTES**


# WITH OVER 600


IMPLEMENTS & ATTACHMENTS,



HAS YOU COVERED.

FIND YOUR NEAREST IRONCRAFT DEALER AT WWW.IRONCRAFTUSA.COM/DEALER-LOCATOR

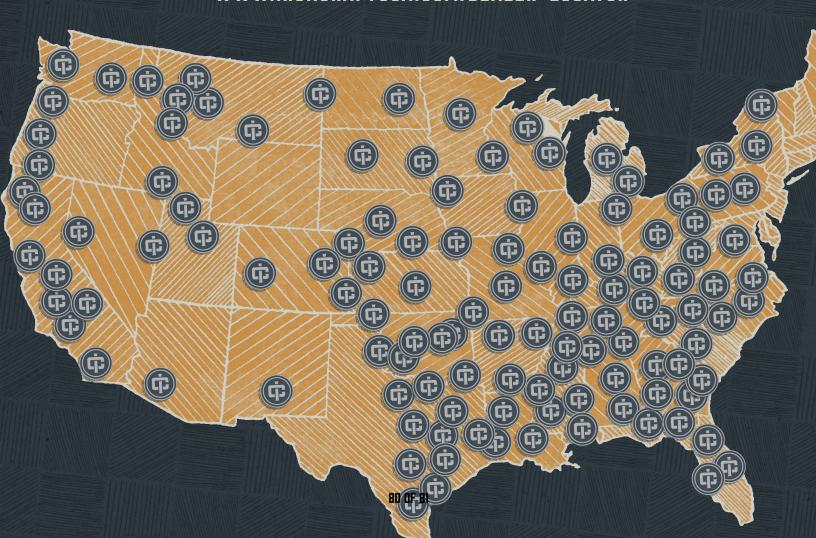

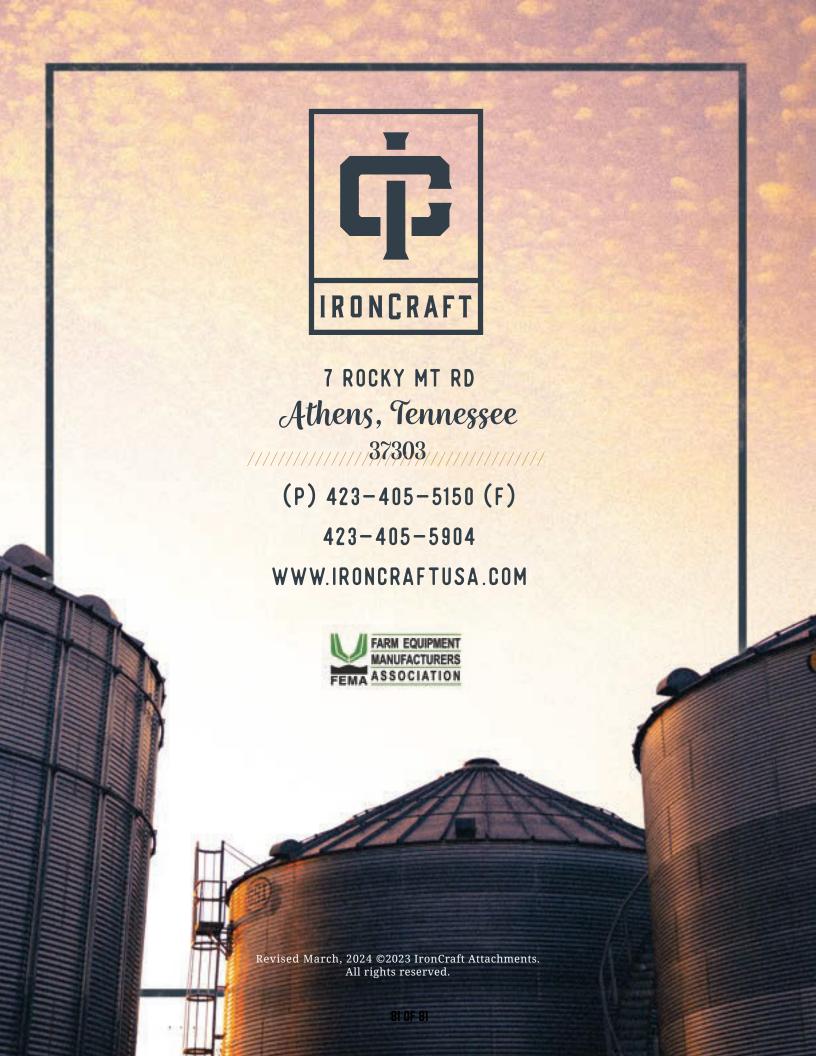



## TABLE OF CONTENTS


BUCKETS	4	Mini Brush Cutter	28
Mini 4-In-1 Bucket	4	Standard Duty Brush Cutter	29
Heavy Duty 4-In-1 Bucket	5	Heavy Duty Brush Cutter	30
X-Treme 4-In-1 Bucket	6	Tree Reaper Brush Cutter	31
Mini Grapple Bucket (See Grapples)	79	X-Treme Brush Cutter	32
Heavy Duty Grapple Bucket (See Grapples)	80	X-Treme Duty Piston Cutter With Mulching Teeth	33
X-Treme Grapple Bucket (See Grapples)	81	Swing Boom Brush Cutter Piston Motor	34
Bale Hay Accumulator Grapple (See Hay Equipment)	85	Severe Duty Bent Axis Piston Cutter	35
Hay Bale Grapple Bucket (See Hay Equipment)	86	Forestry Disc Mulcher	36
Mini Concrete Buckets	7	X-Treme Fixed And Manual Rotating Tree Saw	37
Concrete Buckets	8	Tree Shears	38
High Dump Buckets	9	Stump Grinder	39
Long Bottom Buckets	10	•	
Mini Low Profile Buckets	11	DIRT WORKING	41
Low Profile Buckets	12		
Mini Rock Buckets	13	Stiff Arm Backhoe	41
Standard Rock Bucket	14	Swing Arm Backhoe	42
Heavy Duty Rock Bucket	15	Backhoe Accessories	43
X-Treme Duty Rock Bucket	16	Mini Trencher	44
Snow-N-Litter Buckets	17	X-Treme Trencher	45
High-Capacity Snow-N-Litter Buckets	18	Mini Auger Drives And Bits	46
Turkey Litter Buckets	19	Heavy & Extreme Duty Auger Drives	47
Industrial Track Loader Bucket	20	Auger Bits	48
X-Treme Track Loader Bucket	21	4-Way / 6-Way Dozer Blades	49
Stump Buckets (See Cutters & Forestry)	26	Mini Rotary Tillers	50
		X-Treme Rotary Tillers	51
CUTTERS & FORESTRY	22	Box Scrape Ripper	52
		X-Treme Ripper	53
Log Splitter Tree & Post Puller	22	Mini Land Leveler	54
	23	Land Leveler	54
Tree Spades	24	Severe Duty Root Rake	55
Terminator Tree & Stump Remover	25	X-Treme Root Rake	56
Stump Buckets  V. Transa Stump Croppela	26	Multi-Purpose Power Rake	57
X-Treme Stump Grapple	27	X-Treme Power Rake	58

FORKS	59	HAY EQUIPMENT	84
X-Treme Manure Fork Grapple	59	Double Adjustable Bale Spear	84
Compact Tractor Manure Forks	60	High Back Hay Spear	85
X-Treme Manure Fork	61	Low Back Hay Spear	86
Mini Pallet Forks	62	Bale Hay Accumulator Grapple	87
Standard Pallet Forks	63	Hay Bale Grapple Bucket	88
Heavy Duty Forks & Frame	64	X-Treme Duty Hay Bale Squeezer	89
X-Treme Duty Forks & Frame	65	X-Treme Buty Hay Bale Squeezer	0.
Hydraulic Forks & Frame	66	CNOW FOUIDMENT	
Heavy Duty Walk Thru Forks & Frame	67	SNOW EQUIPMENT	90
		Mini Snow Pusher	90
GRAPPLES	68	X-Treme Snow Pusher	91
Mini Grapple Rake	68	Heavy Duty Snow Plow	92
Standard Grapple Rake	69	X-Treme Snow Plow	93
Heavy Duty Grapple Rake	70	Snow Cannon™	94
Severe Duty Grapple Rake	71	Snow-N-Litter Buckets (See Buckets)	17
X-Treme Grapple Rake With Teeth	72	High-Capacity Snow-N-Litter Buckets (See Buckets)	18
Bale Hay Accumulator Grapple (See Hay Equipment)	85		
Hay Bale Grapple Bucket (See Hay Equipment)	86	OTHER EQUIPMENT	95
Mini Rock Grapple Bucket	73	Mini Skid Steer Breaker/Hammer	95
Standard Rock Grapple	73		95
Heavy Duty Rock Grapple	74	Hydraulic Breaker/Hammer	
X-Treme DutyRock Grapple	75	Post Driver	96
X-Treme Stump Grapple (See Cutters & Forestry)	27	Sod Roller	97
Mini Root Grapple	76	Pick Up Broom	98
Standard Root Grapple	77	Extreme Broom	99
Heavy Duty Root Grapple	78	Mini Boom Pole	100
Severe Duty Root Grapple	79	Telescopic Boom Pole	101
X-Treme Root Grapple	80	Square Boom Pole	102
Mini Grapple Bucket	81	Skid Steer Conversions	103
Heavy Duty Grapple Bucket	82	Hitches	104
X-Treme Grapple Bucket	83	Quick Attach Plate	105



# MINI 4-IN-1 BUCKET

The Mini 4-N-1 Bucket is very versatile attachment for your mini skid steer and are ideal for grappling, dozing, backfiring, loading, digging, and fine grading. The cylinders on our Mini 4-N-1 Buckets have a 2" bore by 6" stroke. The buckets are equipped with a 3/8" x 3" cutting edge. They are also built with top quality steel, oversized pins and bushings, with grease fittings at every pivot point. Every unit exceeds the lifting capacity of the skid steer machine it is used on.





LEARN MORE

# HEINEI

	MINI4N1-36-5	MINIYN1-44-S	MINI4N1-44T-S		
DESCRIPTION	4-N-1 Buck	et For Dingo	4-N-1 Bucket with Teeth		
PRODUCT	MINI4N1-36	MINI4N1-44	MINI4N1T-44		
WORKING WIDTH	36"	44"			
CYLINDER SIZE		2" x 6"			
WEIGHT (LBS)	320	381 390			
TEETH	not available for 3	ble for 36", optional for 44" With teeth			
NOTES	Greas	Grease fittings at every pivot point, also available for MT50			





## HEAVY DUTY

**4-IN-1 BUCKET** 



The cylinders on our Heavy Duty 4-N-1 Buckets have a 2.5" bore. They are equipped with a 1/2" x 6" cutting edge and 1/2" x 4" at all other ground engaging points. They are built with top quality steel, oversized pins and bushings, with grease fittings at every pivot point. Every unit exceeds the lifting capacity of the skid steer machine it is used on. Optional weld-on teeth available.

	HD4N1-66-S	H04N1-72-S		
DESCRIPTION	Heavy Duty	4-N-1 Bucket		
PRODUCT	HD4N1-66	HD4N1-72		
WORKING WIDTH	66"	72"		
CYLINDER SIZE	2-1/2	"bore		
RPM	Recommended for	tractors 50 - 65 hp		
CUTTING EDGES	1/2"	x 6"		
WEIGHT (LBS)	810	840		
TEETH	Optional for both sizes			



# X-TREME 4-IN-1 BUCKET

(Shown with optional side cutter). Our X-treme 4-N-1 Buckets have cylinders with a 3" bore. They are equipped with a 1" x 8" cutting edge and 3/4" x 6" at all other ground engaging points. They are built with top quality steel, oversized pins and bushings, with grease fittings at every pivot point. Every unit exceeds the lifting capacity of the skid steer machine it is used on. Optional weld-on teeth available.



LEARN MORE



	X4N1-72-S	X4N1-78-S	X4N1-84-S	X4N1-72T-S	X4N1-78T-S	X4N1-84T-S		
DESCRIPTION		X-Treme 4-N-1 Bucket		X-Tr	reme 4-N-1 Bucket W/T	eeth		
PRODUCT	X4N1-72	X4N1-78	X4N1-84	X4N1-72T	X4N1-78T	X4N1-84T		
WORKING WIDTH	72"	78"	84"	72"	78"	84"		
RPM		Recommended for machines 65 HP and above						
WEIGHT (LBS)	1150	1255	1271	1312	1391	1448		
NOTES	Side cutters standard, optional weld on teeth and bolt on edge							







Our Mini Skid Steer Concrete Bucket Attachment is designed for carrying and placing concrete using your skid steer. It allows you to accurately place concrete in areas inaccessible to trucks without any waste. It eliminates having to use a wheelbarrow and reduces manual labor.

GONGRETE

	D1/4YCB-S	MINII/4YCB-MTSO			
DESCRIPTION	Mini Concrete Bucket for Dingo	Mini Concrete Bucket for MT50			
PRODUCT	D1/4YCB	MINI1/4YCB			
BUCKET CAPACITY	1/4 Yard				
MATERIAL THICKNESS	3/16"				
WEIGHT (LBS)	253				



# CONCRETE



LEARN MORE

Our concrete bucket is designed for carrying and placing concrete using your skid steer. It allows you to accurately place concrete in areas inaccessible to trucks without any waste. A hydraulic gate is optional.



# GONGRETE

	1/2YCB-S	3/4YCB-S	1YCB-S	1/2YCBWHC-S	3/4YCBWHC-S	1YCBWHC-S
DESCRIPTION	Concrete/Cement Buckets		Concrete/Cement Buckets with Hydraulic Chute			
PRODUCT	1/2YCB	3/4YCB	1YCB	1/2YCBWHC	3/4YCBWHC	1YCBWHC
BUCKET CAPACITY	1/2 Yard	3/4 Yard	1 Yard	1/2 Yard	3/4 Yard	1 Yard
MATERIAL THICKNESS			3/1	16"		
WEIGHT (LBS)	396	425	460	475	504	540



Our High Dump Bucket is an essential tool in the poultry business. With the extra 3 feet of dumping height, you can easily load dump trucks to capacity. The High Dump Bucket has extra tall sides to make your clean up jobs go faster. The cylinders are protected on the sides so you don't lose material space inside the bucket. This feature also makes clean out much easier.

HIGH DUMP

	HDB72-S	HDB84-S	HDB9G-S			
DESCRIPTION		High Dump Buckets				
PRODUCT	HDB72	HDB84	HDB96			
WORKING WIDTH	72"	84"	96"			
CYLINDER SIZE		2" x 10" Twin Cylinders				
CUTTING EDGES		3/4" x 6"				
WEIGHT (LBS)	1057	1144	1231			
NOTES	3 Extra Feet of Dumping Height & 3/16" bucket wrap					



## LONG BOTTOM

LEARN MORE

The Heavy Duty Long Bottom Bucket is designed for greater visibility of the cutting edge. It will also hold more material than the Low Profile Bucket. It's made for up to 65 HP track machines and up to 70 HP on wheel machines. For larger machines, please seer our Track Loader Buckets.



# LONG BOTTOM

	LBB66-S	LBB72-S	LBB74-S	LBB78-S	LBB84-S			
DESCRIPTION		Long Bottom Buckets						
PRODUCT	LBB66	LBB72	LBB74	LBB78	LBB84			
WORKING WIDTH	66"	72"	74"	78"	84"			
BUCKET WRAP			3/16"					
WEAR BARS & SIDE EDGE			3/8"					
RPM	R	Recommended for track machines up to 65 HP and wheel machines up to 70 HP. Extreme Duty Package available for machines up to 110 HP.						
CUTTING EDGES			3/4" x 6"					
WEIGHT (LBS)	403	431	459	478	491			
TEETH	optional for all sizes							
NOTES	Also	Optional bolt on edge, and bolt on side cutting teeth. Also an Extreme Duty package (1/4" wrap, 1" x8" edge, 1/2" side edge and wear bars)						





# LOW PROFILE BUCKETS

The Mini Skid Steer Low Profile Bucket is ideal for moving, digging and grading dirt or gravel.

# LOW PROFILE

	MB2036D-S	MB2036MT-S	MB20420-S	MB20440-S	MB2044MT-S		
DESCRIPTION	DINGO	MT50	DINGO	DINGO	MT50		
PRODUCT	MB2036D	MB2036MT	MB2042D	MB2044D	MB2044MT		
WORKING WIDTH	36	ô"	42"	4	4"		
BACK SIZE		20"					
BUCKET WRAP		3/16"					
WEAR BARS & SIDE EDGE			1/2" x 4" edge				
WEIGHT (LBS)	212	220	232	237	213		
BUCKET HEIGHT		15" or 20"					
NOTES	36" is available in Dingo or MT50 and with or without teeth are optional 42" is available in Dingo or MT 44" is available in Dingo or MT and with optional teeth						



# LOW PROFILE



LEARN MORE

The Heavy Duty Low Profile Bucket is ideal for moving, digging and grading dirt or gravel. It's made for up to 65 HP track machines and up to 70 HP on wheel machines. X-treme Duty package option is made for up to 110 HP machines.



# LOW PROFILE

	LPB66-S	LPB72-S	LPB74-S	LPB78-S	LPB84-S			
PRODUCT FAMILY		Low Profile Bucket						
PRODUCT	LPB66	LPB72	LPB74	LPB78	LPB84			
DESCRIPTION	66"	72"	74"	78"	84"			
BUCKET WRAP	3/16"							
WEAR BARS & SIDE EDGE			3/8"					
WORKING WIDTH	66"	72"	74"	78"	84"			
WEIGHT (LBS)	365	396	404	413	462			
TEETH	Teeth are optional for all models							
NOTES	Optional bolt on edge							







The Mini Skid Steer Rock Bucket is made from top quality steel and is ideal for sifting out large rocks. It works great in pastures, lawns, or construction sites.

# ROCK BUCKET

	DRB36-S	DRB44-S	MTRB36-S	MTRB44-S		
DESCRIPTION	DIN	IGO	MT	r50		
PRODUCT	DRB36	DRB44	MTRB36	MTRB44		
WORKING WIDTH	36"	44"	36"	44"		
TINE SPACING	2-3/8"					
TINE THICKNESS	5/16"					
WEIGHT (LBS)	195	174	195	174		



# STANDARD

LEARN MORE

The Rock Bucket is made from top quality steel and is ideal for sifting out large rocks. It works great in pastures, lawns or construction sites, and will catch any rock or piece of debris that is larger than 2-3/8". The rock bucket comes standard with  $3/4 \times 6$  cutting edge and is upgraded to  $1 \times 8$  edge when optional teeth are added.



# ROCK BUCKET

	SDVTRB66-S	SDVTRB72-S	SDVTRB78-S				
DESCRIPTION		Standard Duty Rock Bucket					
PRODUCT	SDVTRB66	SDVTRB72	SDVTRB78				
WORKING WIDTH	66"	72"	78"				
TINE SPACING		3"					
TINE THICKNESS		3/8"					
RPM	Recommended for tractors 35 - 45 HP						
WEIGHT (LBS)	385	403	450				

HEAVY DUTY

ROCK BUCKET



The Rock Bucket is made from top quality steel and is ideal for sifting out large rocks. It works great in pastures, lawns or construction sites, and will catch any rock or piece of debris that is larger than 2-3/8". The rock bucket comes standard with  $3/4 \times 6$  cutting edge and is upgraded to  $1 \times 8$  edge when optional teeth are added.

ROCK BUCKET

	HDRB72-S	HDRB78-S	HDRB84-S					
DESCRIPTION		Heavy Duty Rock Bucket						
PRODUCT	HDRB72	HDRB78	HDRB84					
DESCRIPTION	72"	78"	84"					
TINE SPACING		2-3/8"						
WORKING WIDTH	72"	78"	84"					
CUTTING EDGES		3/4" x 6"						
WEIGHT (LBS)	524	556	642					
TEETH	Optional to all sizes							
NOTES	1" x 8" cutting edge, Dual 1-1/4" rods to reinforce the 5" tall rock dam							

BUCKETS

CUTTERS &

WORKIN

FORKS

GRAPPLE

EQUIPMENT

EQUIPMEN

EQUIPMENT



# X-TREME DUTY ROCK BUCKET

Our X-treme Rock Bucket is bigger is better. It comes with 3" tine spacing, 3/8" tines, and dual 1 ¼" rods to reinforce the 5" tall rock dam. Our X-treme rock bucket also has fully welded front tines in place of cutting edge (shown).











	XDRB72-S	XDRB78-S	XDRB84-S					
DESCRIPTION		X-Treme Duty Rock Bucket						
PRODUCT	XDRB72	XDRB78	XDRB84					
WORKING WIDTH	72"	78"	84"					
TINE SPACING		3"						
WEIGHT (LBS)	719	760	818					
NOTES	Fully Welded Tines, Dual 1-1/4" rods to reinforce the 5" tall rock dam							



## SNOW-N-LITTER

The Snow & Litter Bucket is ideal for lifting large volume, low-weight material such as snow, mulch, manure, sawdust, shavings, and any other type of loose or light debris. It's made for up to 65 HP track machines and up to 70 HP on wheel machines. X-treme Duty package option is made

for up to 110 HP machines.



SNAW A LITTER

	ALL MODELS
PRODUCT FAMILY	Snow-N-Litter Bucket 54" – 108"
BUCKET WRAP	3/16"
WEAR BARS & SIDE EDGE	3/8"
RPM	Recommended for track machines up to 65 HP and wheel machines up to 70 HP. Extreme Duty Package available for machines up to 110 HP.
CUTTING EDGES	3/4" x 6"

	SNLBS4-S	SNLBGO-S	SNLB63-S	SNLB66-S	SNLB66-BE	SNLB72-S	SNLB78-S	SNLB81-S	SNLB81-BE
PRODUCT	SNLB54	SNLB60	SNLB63	SNLB66	SNLB66	SNLB72	SNLB78	SNLB81	SNLB81
DESCRIPTION	54"	60"	63"	66"	66" W/ BOLT ON EDGE	72"	78"	81"	81" W/ BOLT ON EDGE
WORKING WIDTH	54"	60"	63"		66"	72"	78"	8	1"
WEIGHT (LBS)	296	329	457	478	488	505	526	545	555

	SNLB84-S	SNLB90-S	SNLB90-BE	SNLB96-S	SNLB102-XD	SNLB102-XD-BE	SNLB108-XD	SNLB108-XD-BE
PRODUCT	SNLB84	SNLB90	SNLB90	SNLB96	SNLB102	SNLB102	SNLB108	SNLB108
DESCRIPTION	84"	90"	90" W/ BOLT ON EDGE	96"	102"	102" W/ BOLT ON EDGE	108" INCLUDES X-TREME PACKAGE	108" INCLUDES XD PACKAGE W/ BOLT ON EDGE
WORKING WIDTH	84"	90"		96"	1	.02"	1	108"
WEIGHT (LBS)	557	617	657	615	653			



## HIGH-CAPACITY

**SNOW-N-LITTER BUCKETS** 



LEARN MORE

The High Capacity Snow Bucket was built to handle large volumes of material. This bucket has viewing slots in the back, allowing line of sight with the edge. With a 31" height and 41" depth, the high capacity bucket will make transportation of light material more efficient. The bucket is constructed of 3/16th" steel with a 3/4 x 6 cutting edge. Optional Bolt on edge available.



# SNOW & LITTER

	HCSB72-S	HCSB78-S	HCSB84-S	HCSB96-S	HCSB108-S			
DESCRIPTION		High Capacity Snow & Litter Buckets						
PRODUCT	HCSB72	HCSB78	HCSB84	HCSB96	HCSB108			
WORKING WIDTH	72"	78"	84"	96"	108"			
BUCKET WRAP			3/16"					
CUTTING EDGES			3/4" x 6"					
WEIGHT (LBS)	610	639	674	748	810			
NOTES		Slotted Back Plate for Edge View						





# TURKEY LITTER BUCKETS



This bucket is mostly used for snow removal, loading mulch and poultry litter removal. It is basically an oversized version of our snow and litter bucket. It's made for up to 65 HP track machines and up to 70 HP on wheel machines. X-treme Duty package option made for up to 110 HP machines.

LITTER

	TLB78-S	TLB84-S	TLB96-S		
DESCRIPTION		Turkey Litter Bucket			
PRODUCT	TLB78	TLB84	TLB96		
WORKING WIDTH	78"	84"	96"		
BUCKET WRAP	3/16"				
WEAR BARS & SIDE EDGE		3/8"			
RPM	Recommended for track machines up to 65 HP and wheel machines up to 70 HP. Extreme Duty Package available for machines up to 110 HP.				
CUTTING EDGES	3/4" x 6"				
WEIGHT (LBS)	684 808 881				
NOTES	Designed for large volume, low weight material.				



## INDUSTRIAL

TRACK LOADER BUCKET

The Industrial Track Loader Bucket is a comparable alternative to your track loader OEM bucket with some upgrades. 1" x 8" cutting edge gives more strength to your bucket while giving you 2" more cutting edge. A rolled back allows for exceptional cleanout. Reinforced quick attach and two piece back for extra strength. Low profile design for better visibility. (Image shown with optional bolt on edge and optional side cutters)





	ITAKB72-SC-BE	ITAKB78-SC-BE	ITAKB80-SC-BE	ITAKB84-SC-BE					
PRODUCT FAMILY		Industrial Track Loader Bucket with bolt on edge and side cutters							
PRODUCT	ITAKB72	ITAKB78	ITAKB80	ITAKB84					
DESCRIPTION	72"	78"	80"	84"					
DIMENSIONS		1/2"							
WORKING WIDTH	72"	72" 78" 80"		84"					
CUTTING EDGES		1" x 8"							
WEIGHT (LBS)	689	729	739	750					
NOTES	Bolt on edge and sidecutters								

	ITAKB72T-SC	ITAKB78T-SC	ITAKB80T-SC	ITAKB84T-SC				
PRODUCT FAMILY	Industrial Track Loader Bucket with teeth and side cutters							
PRODUCT	ITAKB72T	ITAKB78T	ITAKB80T	ITAKB84T				
DESCRIPTION	72"	78"	80"	84"				
DIMENSIONS		1/2"						
WORKING WIDTH	72"	78"	80"	84"				
CUTTING EDGES		1" x 8"						
WEIGHT (LBS)	730	791	809	813				
TEETH	Optional teeth							









Designed for the most demanding track loaders on the market. 1" x 8" cutting edge, 1/2" AR400 heel plate and 1/2" wear bars, reinforced quick attach, ¼" bucket wrap, rolled back for easy clean out. 65 HP and over. (Image shown with optional teeth and optional side cutters)

TRACK I NANFR

	TAKB72-SC-BE	TAKB78-SC-BE	TAKB81-SC-BE	TAKB84-SC-BE
PRODUCT FAMILY	X-Treme Track Loader Bucket with bolt on edge and side cutters			
PRODUCT	TAKB72	TAKB78	TAKB81	TAKB84
DESCRIPTION	72"	78"	81"	84"
BUCKET WRAP	1/4"			
WEAR BARS & SIDE EDGE	1/2"			
HEEL PLATE	1/2" AR400			
RPM	Recommended for machines 65 HP and above			
WORKING WIDTH	72"	78"	81"	84"
CUTTING EDGES	1" x 8"	1" x 8"	1" x 8"	1" x 8"
WEIGHT (LBS)	717	764	787	811

	TAKB72T-SC	TAKB78T-SC	TAKB81T-SC	TAKB84T-SC
PRODUCT FAMILY	X-Treme Track Loader Bucket with teeth and side cutters			
PRODUCT	TAKB72T	TAKB78T	TAKB81T	TAKB84T
DESCRIPTION	72"	78"	81"	84"
BUCKET WRAP	1/4"			
WEAR BARS & SIDE EDGE	1/2"			
HEEL PLATE	1/2" AR400			
RPM	Recommended for machines 65 HP and above			
WORKING WIDTH	72"	78"	81"	84"
CUTTING EDGES	1" x 8"			
WEIGHT (LBS)	760	816	834	855



## LOG SPLITTER



LEARN MORE

These log splitters are operated from inside your cab. Simply maneuver the splitter over the log and activate the auxiliary hydraulics to split the log. Logs can also be picked up and placed with these splitters. Rear mount or side mount available for quick attach.



# LOG SPLITTER

	ILS30T-S	HLS30T-S	
DESCRIPTION	Inverted 40 Ton Log Splitter	Horizontal 40 Ton Log Splitter	
PRODUCT	ILS30T	HLS30T	
CYLINDER SIZE	5" X 30"		
WEIGHT (LBS)	967		
NOTES	10" I-beam, Two quick attach positions available, Removable cutting heads, Optional 4-way head		

This versatile puller will pull posts up to 8" in diameter and trees up to 6" in diameter. It allows you to pull up unwanted trees and shrubs without having to dig around the roots.

	TPP-S
DESCRIPTION	Tree and Post Puller
PRODUCT	TPP
CYLINDER SIZE	2-1/2" x 8"
WEIGHT (LBS)	280



# SPADES

The IronCraft Tree Spade is an essential tool in the landscaping and lawn care or nursery industry that can easily digs out stumps, transplant trees or dig trenches. Our tree spade is made from abrasion resistant ¼" AR400 material. The front edge is beveled to give a sharp penetrating edge for digging. This is offered in 40" and 48" sizes.



# TREE SPADE

	TREESPADE40-S	TREESPADE48-S	
DESCRIPTION	Tree Spade		
PRODUCT	TREESPADE40	TREESPADE48	
WORKING WIDTH	40"	48"	
FRAME MATERIAL	1/4" AR400		
WEIGHT (LBS)	246	270	
NOTES	Front Beveled Edge		



## TERMINATOR

TREE & STUMP REMOVER

This versatile puller will pull posts up to 8" in diameter and trees up to 6" in diameter. It allows you to pull up unwanted trees and shrubs without having to dig around the roots.

# TFDMINATAI









	TTSR-S
DESCRIPTION	Terminator Tree & Stump Remover
PRODUCT	TTSR
# OF TEETH	66 (32 Horizontal & 34 Vertical)
TEETH SIZE	5/8" AR400 (Vertical) & 1" AR400 (Horizontal)
CLAMPING FORCE	29,000 lbs
PIN SIZE	1-1/4" Cylinder pins, 1-1/2" Main pivot Pins
CYLINDER SIZE	Dual 3-1/2" x 4"
CUTTING EDGES	Replaceable 1" x 8"
WEIGHT (LBS)	667
NOTES	



## STUMP

The Heavy-Duty Stump Bucket is an excellent addition to your skid steer attachments. Easily dig around the stump, and then pop it out. We have even had contractors dig house footings with the stump bucket. These stump buckets will enable you to be more versatile in your contracting needs.



LEARN MORE



	SB-S	XSB-S
DESCRIPTION	Heavy Duty Stump Bucket	X-Treme Stump Bucket
PRODUCT	SB	XSB
WEIGHT (LBS)	277	428







### X-TREME

STUMP GRAPPLE

Our X-treme Stump Grapple is made from 1/2" top quality steel plate and features a 1" cutting edge, replaceable teeth and a 3/8" hose. Not only are you able to dig out stumps, you are able to carry them away afterwards. No need to have another attachment for loading the stump into your dump truck, or moving the stump to a burn pile.









	SG-S
DESCRIPTION	X-Treme Stump Grapple
PRODUCT	SG
WEIGHT (LBS)	527



### MINI BRUSH CUTTER

28




LEARN MORE

The Mini Skid Steer Brush Cutter easily fits into tight places that your standard skid steer brush cutter can't reach. It offers a 44" cut to tackle even the most demanding jobs, and has the capability of cutting 3" brush in a single pass. Standard features include a Parker motor, Omni gearbox.



	DBC-S	MTBC-S			
DESCRIPTION	44" Brush Cutter For Dingo	44" Brush Cutter For MT50			
PRODUCT	DBC	MTBC			
MOUNT OPTIONS	Dingo	MT50			
MOTOR	Parker	Motor			
FLOW REQUIREMENT (GPM)	10-15	10-15 GPM			
GEARBOX	Omni G	earbox			
WORKING WIDTH	4-	4"			
WEIGHT (LBS)	7(	708			
CUTTING CAPACITY	3	u .			

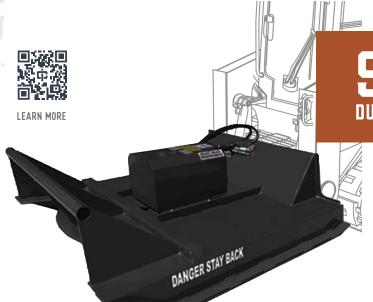

### **STANDARD**

**DUTY BRUSH CUTTER** 

Our Standard Duty Brush Cutter comes with a 60" or 72" mowing deck. It features 2 blades, a 40HP gear box and stump jumper. A flow of 11–20 GPM is required.

	SDBC60-S	SDBC72-S	SDOFBC60-S	SDOFBC72-S			
	506060-5	5UBC/6-5	500FBC60-5	2001 BC/G-2			
DESCRIPTION	Standard E	Brush Cutter	Standard Open Fr	ont Brush Cutter			
PRODUCT	SDBC60	SDBC72	SDOFBC60	SDOFBC72			
WORKING WIDTH	60"	72"	60"	72"			
MOTOR		High Torque Motor v	w/ built in relief valve				
CASE DRAIN		Not Required					
FLOW REQUIREMENT (GPM)		14 - 20	0 GPM				
GEARBOX		40 HP Ri	ght Angle				
# OF BLADES		:	2				
WEIGHT (LBS)	833	971	874	1004			
CUTTING CAPACITY	3"						
DECK THICKNESS		3/16" deck w/ 3/8" A36 reinforced sides					
BLADE HOLDER		Stump	Jumper				



### HEAVY DUTY

**BRUSH CUTTER** 

Our Heavy Duty Brush Cutter comes with a 60" or 72" mowing deck. It features a RC100 gear box, Parker motor and fabricated blade holder with bidirectional blades. A flow of 14–20 GPM is required.



	HDBCNS60-3-S	HDBCNS72-2-S	HDBCNS72-3-S	HDBCNS78-3-S		
DESCRIPTION	Heavy Duty Brush Cutter					
PRODUCT	HDBCNS60-3	HDBCNS72-2	HDBCNS72-3	HDBCNS78-3		
WORKING WIDTH	60"	72"		78"		
MOTOR		Parker Mot	or			
CASE DRAIN		Not Require	ed			
FLOW REQUIREMENT (GPM)		14 - 20 GPI	M			
GEARBOX		RC100				
# OF BLADES	3	2	3	3		
WEIGHT (LBS)	1250	1380	1500	-		
CUTTING CAPACITY	4"	4"	4"	4"		
DECK THICKNESS	3/16" deck w/ 3/8" A36 reinforced sides					
BLADES		5/8" AR400	0			

## TREE REAPER

**BRUSH CUTTER** 

The IronCraft X-treme Tree Reaper combines strength and efficiency. The Direct Drive motors provide all the power, without the restrictions of a gear box. The Tree Reaper uses a 16-26 GPM Gear motor (no case drain required) providing a 5" cutting capacity, or a 17-30 GPM Piston motor (case drain required) providing a 7" cutting capacity. This cutter features replaceable skid shoes, 3x AR400 non-welded blades, optional mulching teeth, and an optional grill









	TR1626-60-S	TR1626-72-S	TR1626-78-S	TR1727-60MT-S	TR1727-72MT-S	TR1727-78MT-S
DESCRIPTION	Tı	ree Reaper Brush Cutt	ter	Tree Reaper Brush	Cutter - Piston Motor	with mulching teeth
PRODUCT	TR1626-60 TR1626-72		TR1626-78	TR1727-60MT	TR1727-72MT	TR1727-78MT
WORKING WIDTH	60"	72"	78"	60'	72"	78"
MOTOR	1	6-26 GPM Piston moto	or	17-30	GPM Bent Axis Piston	motor
CASE DRAIN		Not Required		Required		
FLOW REQUIREMENT (GPM)		16-26 GPM		17-27 GPM		
# OF BLADES			:	3		
WEIGHT (LBS)	1126	1333	1408	1151	1370	1438
CUTTING CAPACITY		5"			7"	
SKID SHOES			Repla	ceable		
BLADES	5/8" AR400 Non-Welded					
TEETH		Mulching	g teeth optional on TI	R1626 and standard o	n TR1727	



### X-TREME BRUSH CUTTER

Our X-treme Brush Cutter is an ideal attachment for tough clearing applications. The cutter comes in a 60", 72", 78" or 84" cutting width. It is equipped with bidirectional blades, powered by a high torque motor and features a 100–hp Omni gear box. A flow of 14–20 GPM is required on the low flow, 20–30 GPM on the mid flow.



RDUGH FIITTED

	X-TREME BRUSH CUTTER — ALL MODELS				
CASE DRAIN	Not Required				
# OF BLADES	3				
CUTTING CAPACITY	6"				
DECK THICKNESS	3/16" deck w/ 3/8" AR400 reinforced sides				
BLADE HOLDER	6 Bolt Flange Blade Carrier				
BLADES	5/8" AR400				

	XBCLF60-S	XBCLF72-S	XBCMF60-S	XBCMF72-S	XBCMF78-S	XBCMF84-S		
DESCRIPTION		X-Treme Brush Cutter						
PRODUCT	XBC60LF	XBC72LF	XBC60MF	XBC72MF	XBC78MF	XBC84MF		
FLOW REQUIREMENT (GPM)	14 - 20	O GPM	20 - 30 GPM					
MOTOR	High Torque w/ built in	High Torque Parker Motor w/ built in relief valve  High Torque Parker Motor						
GEARBOX			100 HP ri	ight angle				
WORKING WIDTH	60" 72"		60"	72"	78"	84"		
WEIGHT (LBS)	1390	1641	1393	1716	2016			

	XBC1626-60-S	XBC1626-72-S	XBC1626-78-S	XBC1626-84-S
DESCRIPTION	16-26 GPM - 60"	16-26 GPM - 72"	16-26 GPM - 78"	16-26 GPM - 84"
PRODUCT	XBC1626-60	XBC1626-72	XBC1626-78	XBC1626-84
FLOW REQUIREMENT (GPM)		16-26 GPM		
WORKING WIDTH	60"	72"	78"	84"
WEIGHT (LBS)	1450	1550	1660	1760

### X-TREME D

PISTON CUTTER WITH MULCHING TEETH



Our X-treme Brush Cutter is an ideal attachment for tough clearing applications. The cutter comes in a 60", 72", 78" or 84" cutting width. It is equipped with bidirectional blades, powered by a high torque direct drive piston motor and bearing housing. We offer flows of 17–27 GPM, 27–35 GPM and 30–48 GPM. No 4th Blade option on 60" Cutters.

	X-TREME DUTY PISTON CUTTER WITH MULCHING TEETH — ALL MODELS
MOTOR	Piston Motor Direct Drive
CASE DRAIN	Required
HOSES	3/4" hoses
# OF BLADES	3
CUTTING CAPACITY	7"
BLADES	5/8" AR400


	XBC1730-60MT-S	XBC1730-72MT-S	XBC1730-78MT-S	XBC1730-84MT-S			
PRODUCT	XBC173060	XBC173072	XBC173072 XBC173078				
FLOW REQUIREMENT (GPM)		17-27	GPM				
WORKING WIDTH	60"	72"	78"	84"			
WEIGHT (LBS)	1315	1575	1660	1785			
DECK THICKNESS		3/16" deck w/ reinforced sides					
BLADE HOLDER		3/8" Double clover leaf shaped blade holder					
TEETH	Mulching teeth optional						

	XBC2735- 60MT-S	XBC2735- 72MT-S	XBC2735- 78MT-S	XBC2735- 84MT-S	XC3048- 60MT-S	XC3048- 72MT-S	XC3048- 78MT-S	XC3048- 84MT-S
PRODUCT	XBC273560	XBC273572	XBC273578	XBC273584	XBC304860	XBC304872	XBC304878	XBC304884
FLOW REQUIREMENT (GPM)		27-35 GPM 30-48 GPM						
WORKING WIDTH	60"	72"	78"	84"	60"	72"	78"	84"
WEIGHT (LBS)	1740	1851	1964	2216	1588	1900	2024	2241
DECK THICKNESS		1/4" deck with 3/8" AR400 reinforced sides						
BLADE HOLDER	1/2" Double clover leaf shaped blade holder							
TEETH	Mulching teeth optional							

### SWING BOOM

BRUSH CUTTER PISTON MOTOR

Our Swing Boom Cutter is a great implement to add to your collection. It is designed for cutting banks, fence lines, and right of ways. It also works great for clearing pond banks and cutting trails. This cutter has a significant reach advantage over our typical cutter. With a reach of 96" when extended horizontally and a vertical reach of sixteen feet, it makes clearing unwanted tree limbs less of a hassle. The cutter will also swing to the right and can be used as a side cutter. It is powered by a high torque motor with built in relief valve or choose a direct drive piston motor on a bearing housing with 4000 Max PSI.

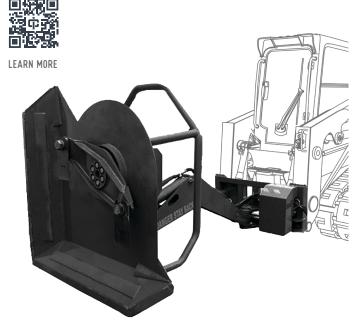

	SBCNS	SBC			
DESCRIPTION	Piston Motor Swing Boom Brush Cutter	Swing Boom Brush Cutter			
PRODUCT	SBCNS	SBC			
FLOW REQUIREMENT (GPM)	17 - 27 GPM	14-20 GPM			
MOTOR	Direct Drive Piston Motor	High Torque Motor w/ built in relief valve			
CASE DRAIN	Required	Not Required			
CYLINDER SIZE	3" x 16" tilt cylinder	3" x 16" tilt cylinder			
WIRING HARNESS OPTIONS		Required to operate Universal, 14 pin, 8 pin, or 7 pin			
WORKING WIDTH	4	4"			
WEIGHT (LBS)	14	200			
CUTTING CAPACITY	4"	3"			
BLADES	5/8" A	5/8" AR400			



### SEVERE DUTY

BENT AXIS PISTON CUTTER



The IronCraft Severe Duty Piston Cutter is powered by a Parker bent axis piston motor. With a continuous cutting capacity of 10 inches, you will make quick work of your brush cutting needs. The 72" cutter has four blades/16 mulching teeth, and the 78" cutter has four blades/20 mulching teeth. Either option will allow for the ultimate mulching capability.









	SVBAPC72L-S	SVBAPC78L-S	SVBAPC72H-S	SVBAPC78H-S			
DESCRIPTION	Severe Duty Bent Axis Piston Cutter						
PRODUCT	SVBAPC72L	SVBAPC78L	SVBAPC72H SVBAPC78				
WORKING WIDTH	72"	78"	72"	78"			
MOTOR		Parker Bent	Axis Motor				
CASE DRAIN		Requ	ired				
FLOW REQUIREMENT (GPM)	20-30 GPM 30-50 GPM						
# OF BLADES		4	:				
# OF MULCHING TEETH	16	20	16 20				
WEIGHT (LBS)	1979	2190	1328 2223				
CUTTING CAPACITY		10	п				
DECK THICKNESS		1/4" (	leck				
SKID SHOES	AR400 Replaceable						
BLADE HOLDER	155,000 PSI round carrier						
BLADES		3/4" A	R400				

### **FORESTRY**

DISC MULCHER

The Forestry Disc Mulcher 44" can mulch 4" material in seconds, and cuts 8" diameter trees with ease. This mulcher features a 44" diameter cutting area, and a machined and statically balanced disc. The disc holds a total of 30 mulching teeth, and the deck has an additional 4 mulching teeth, providing the muscle for your toughest clearing needs.



## nige Mili euro









	FDM44-S	FDM44-150	FDM60-S			
DESCRIPTION	Forestry Disc	Mulcher 44	Forestry Disc Mulcher 60			
PRODUCT	FDM44	FDM44	FDM60			
WORKING WIDTH	44	1"	60"			
MOTOR	100CC Motor	150CC Motor				
FLOW REQUIREMENT (GPM)	20-30 GPM	32-44 GPM				
WEIGHT (LBS)	1749	1749 2507				
CUTTING CAPACITY	8	п	14"			
DECK THICKNESS		3/8" Thick deck				
TEETH	1	Teeth on all surfaces, deck and sides on 44"				
NOTES	1" hinged deflector plate, Larger trees can be vertically mulched quickly, Machine is nimble and easily maneuvered. 66": Teeth on top & bottom of blade, 1" thick hinged deflector, Throws material away from the machine, & allows below ground cutting					





### TREE SAW

### X-TREME FIXED AND MANUAL ROTATING



The X-treme Tree Saws are useful attachment when it comes to land management. From clearing undergrowth, to cutting out small trees, these attachment will leave your land looking like it should. We have two versions of our tree saw: Fixed and Manual Rotating. The Manual Rotating provides a 90-degree rotation in either direction. Hydraulics on both models are routed through the boom for protection. Both models have a ½" AR400 blade holder, and 15x high strength, four sided cutting teeth.









	FTS1723-S	FTS2030-S	
DESCRIPTION	X-Treme Fixed Tree	Saw (shown above)	
PRODUCT	FTS1723	FTS2030	
CASE DRAIN	Not Required	Required	
FLOW REQUIREMENT (GPM)	17-23 GPM	20-30 GPM	
WEIGHT (LBS)	907	911	
BLADE HOLDER	1/2" AR400		

	MTS1723-S	MTS2030-S	
DESCRIPTION	Manual Rota	ting Tree Saw (not shown)	
PRODUCT	MTS1723	MTS2030	
CASE DRAIN	Not Required	Required	
FLOW REQUIREMENT (GPM)	17-23 GPM	20-30 GPM	
WEIGHT (LBS)	867	909	
BLADE HOLDER		1/2" AR400	



### TREE SHEARS



LEARN MORE

Our X-treme Tree Shear non rotating has a 5" bore cylinder that can generate up to 40 tons of shearing force. It is constructed with a 1" thick AR400 blade, which gives you the ability to cut up to 12" diameter trees and logs. It's design forces trees to fall consistently to the right, allowing the operator to accurately position where the tree will land.

Our X-treme Rotating Tree Shear has a 5" bore cylinder that can generate up to 40 tons of shearing force. It is constructed with a 1" thick AR400 blade, which gives you the ability to cut up to 12" diameter trees and logs. It features a 90 degree rotation that is offered in manual or hydraulic. (Note: manual is a two-man operation.) It's design forces trees to fall consistently to the right, allowing the operator to accurately position where the tree will land.



# TREE SHEAR

	NRTS-S	NRTS-S TRSHM-S					
PRODUCT FAMILY		X-Treme Tree Shear					
PRODUCT	NRTS	TRSHM	TRSH-HYD				
DESCRIPTION	NON-ROTATING	NON-ROTATING MANUAL ROTATING					
SHEARING FORCE		40 tons					
DEGREE OF ROTATION		90 de	grees				
CYLINDER SIZE		5" x 12"					
WIRING HARNESS OPTIONS			Universal, 7pin, 8pin, or 14 pin				
WEIGHT (LBS)	977	999	1056				
BLADES		1" thick AR400					







### STUMP

GRINDER

Three different flow ranges. Replaceable Rubber Chip Guard. Replaceable Motor Protector. Blade Holder Designed with Green Teeth for less chatter. Additional Green Teeth information: Green teeth Wear Sharp, Bolt on replaceable teeth, Rotatable 180 degrees for longer cutting life, Holders bolt on to the blade holder, Blade holder is AR400 Steel. 10" or greater depth.









	CTC1707 C	CTC2020 C	етерони е	
	STG1727-S	STG2030-S	STG3044-S	
DESCRIPTION		Stump Grinder		
PRODUCT	STG1727	STG2030	STG3044	
MOTOR	Star motor (No case drain)	Bent Axis Pison (F12-90)	Radial Piston	
RPM	805 – 1275	830 – 1245	750 – 1130	
TIP SPEED (MPH)	65 – 102	66 – 100	60 – 90	
TORQUE (FT*LBS)	194	221	428	
TEETH		30		
REPLACEMENT CHIP GUARD		Yes		
CUT SIZE (IN)	27.5			
CUT DEPTH (IN)		12		
WEIGHT (LBS)				





# STIFF ARM

Our X-treme Stiff Arm Backhoe is an excellent tool for digging ditches, removing stumps and digging footings. With the option of adding a thumb, you can move logs, chunks of cement and most anything else. Buckets come in sizes of 8", 12", 16", 20" and 24". The bucket is powered by an American made 3" x 16" cylinder. With 7' of digging depth and 14,000 lbs. of ripping force, it is an aggressive digging machine.

STIFF ARM


	XBHSTA-S
DESCRIPTION	Stiff Arm Backhoe
PRODUCT	XBHSTA
DIGGING DEPTH	7"
BUCKET SIZES	8" to 24"
CYLINDER SIZE	3" x 16"
WEIGHT (LBS)	394
NOTES	Optional Thumb Attachment



## SWING ARM

Our Swing Arm Backhoe is an excellent tool for digging ditches, removing stumps and digging footings. It uses an electric over hydraulic control to operate both the bucket and swing cylinder from one auxiliary valve on your machine. This allows a 110 degree swing right or left.

With the option of adding a thumb, you can move logs, chunks of cement or just about anything else. Buckets come in sizes of 8", 12", 16", 20" and 24". The bucket is powered by an American made 3" x 16" boom cylinder and 3" x 6" swing cylinder. With 7' of digging depth and 14,000 lbs of ripping force, it is an aggressive digging machine.

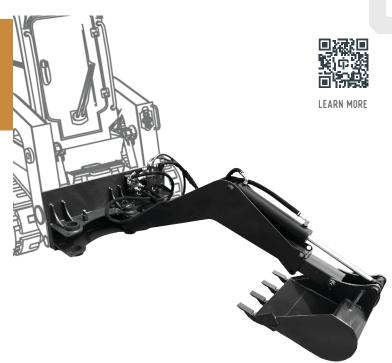

# SWING ARM

	XBHSWA-40M	XBHSWA-D9M	XBHSWA-07M	XBHSWA-91				
PRODUCT FAMILY	Swing Arm Backhoe							
WIRING HARNESS	Universal Wiring Harness	Universal Wiring Harness 14 Pin Wiring Harness 8 Pin Wiring Harness 7 Pin Wiring Harn						
PRODUCT		ХВН	SWA					
DESCRIPTION		Swing Arm Backhoe						
DIGGING DEPTH	7"							
DEGREE OF SWING	110 Degrees							
BUCKET SIZES	8" to 24"							
CYLINDER SIZE	Boom - 3" x 16"   Swing - 3"" x 6"							
WEIGHT (LBS)		5'	71					





# ACCESSORIES

BUCKET

FORESTRY

WORKIN

FORKS

GRAPPLE

HAY EQUIPMENT

SNOW EQUIPMENT

OTHER EQUIPMENT

# ACCESSORIES

### **BACKHOE THUMB**

	XBHT-S
DESCRIPTION	Backhoe Thumb
PRODUCT	ХВНТ
WEIGHT (LBS)	31

### **BACKHOE BUCKET**

	XBHB8-S	XBHB12-S	XBHB16-S	XBHB20-S	хвнв24-5
DESCRIPTION			Backhoe Bucket		
PRODUCT	ХВНВ8	XBHB12	XBHB16	XBHB20	XBHB24
SIZE	8"	12"	16"	20"	24"
WEIGHT (LBS)	94	119	132	156	170



### MINI TRENCHER

Our Mini Skid Steer Trencher is ideal for trenching water lines and cable lines in places where a full size trencher cannot get to. With a Dirt chain, ½ Rock & Frost chain or full Rock & Frost chain, we are sure to have a chain to fit your trenching needs.





# TRENGHER

	MTCH 1218-36-4C	MTCH 1218-36-60	MTCH 1218-36-6C	MTCH1218- 36-6RF	MTCH1218- 36-MT50-4C	MTCH1218- 36-MT50-60	MTCH1218- 36-MTSO-6C	MTCH1218- 36-MTSO- 6RF
DESCRIPTION				36" Mini	Trencher			
PRODUCT		Dir	1go			МТ	:50	
CHAIN TYPE	4" Combo Chain	6" Dirt Chain	6" Combo Chain	6" Rock And Frost Chain	4" Combo Chain	6" Dirt Chain	6" Combo Chain	6" Rock And Frost Chain
MOUNT OPTIONS		Dingo MT50						
CHAIN WIDTH				3	6"			
FLOW REQUIREMENT (GPM)		12-18 GPM						
WEIGHT (LBS)	474							
NOTES	1	10" auger, Chain	types: Dirt, 1/2	' rock & frost, oı	full rock & fros	st, mount option	s Dingo or MT5	1



### X-TREME

TRENCHER

Our X-treme Skid Steer Trencher is ideal for trenching water lines and cable lines in a timely manner. With a dirt chain, 1/2 rock & frost or full rock & frost we are sure to have a chain to fit your trenching needs.

We offer two arm sizes for different digging depths. Different chain widths, 36" or 48" lengths. Our X-treme Skid Steer Trenchers come with a full rock guard.









	XTRENCH 36-lf-60	XTRENCH 36-lf-60	XTRENCH 36-lf-6rf	XTRENCH 48-lf-6C	XTRENCH 48-lf-60	XTRENCH 48-lf-6rf	
DESCRIPTION			X-treme Skids	teer Trencher			
PRODUCT	XTRENCH36			XTRENCH48			
CHAIN TYPES	6" Combo Chain	6" Dirt Chain	6" Rock And Frost Chain	6" Combo Chain	6" Dirt Chain	6" Rock And Frost Chain	
CHAIN WIDTH		36"		48"			
FLOW REQUIREMENT (GPM)			15-20 GPM o	r 20-30 GPM			
WEIGHT (LBS)	668			686			
NOTES	15-20 GPM	15-20 GPM flow or a 20-30 GPM flow with a 15" auger. Chain types: Dirt, 1/2" rock & frost, full rock & frost					



## MINI AUGER DRIVES AND BITS

Our Mini Auger Attachment has a continuous pressure rating of 3,000 psi and an intermittent pressure of 4,000 psi. The auger consists of a motor mounted directly to the planetary gear box with no chains to break or come loose. It comes complete with mounting plate, hoses and couplings. The output shaft is either a 2" hex or 2-9/16" round drive and is powerful enough for the tough jobs.



LEARN MORE



# AUGER DRIVE

	MINIADH-S	MINIADH-MTSO			
DESCRIPTION	Auger Drive Hex For Dingo	Auger Drive Hex For MT50			
PRODUCT	MINI	IADH			
FLOW REQUIREMENT (GPM)	10 0	GPM			
DRIVE SYSTEM	Direct Drive throu	gh Planetary Gear			
AUGER SIZES	Hex A	Auger			
WEIGHT (LBS)	28	287			
NOTES	Capable of driving up	to 36" bit2" hex shaft			

### **AUGER BIT HEX**

	CID9100M	CID9092M	CID9168M	CID9156M	CID9152M	CID8086M	СІВЭЧЧЗМ	C109093M	CID8030M	CID8050M
DESCRIPTION		Auger Bit Hex								
DIAMETER	4" - 42"	6" – 42"	9" – 42"	12" – 42"	15" – 42"	18" – 42"	20" – 42"	24" – 42"	30" – 42"	36" – 42"
NOTES					Bits are	42" tall				



### **HEAVY & EXTREME DUTY** UGER DRIVES

One of our most popular and highest rated attachments, the Auger Drive is available for skid steers and tractors with universal quick attachment plates with a standard or side shift mount. IronCraft Auger Drives feature a planetary gear drive second to none in North America, completely eliminating the common issue of shaft pullout. High torque output means IronCraft augers power through tough earth conditions and can handle rock auger bits for extreme earth conditions.



**DESCRIPTION** 

FLOW REQUIREMENT

**DRIVE SYSTEM** 

**AUGER SIZES** 

WEIGHT (LBS)

NOTES

**PRODUCT** 



HAD-S

Heavy Duty Auger Drive Hex

HAD

Hex Auger

300



Heavy Duty Output Shaft and Excavator mounts available





# AUGER BITS

### **AUGER BIT HEX**

	CID9107M	CID9108M	CID9110M	CID9112M	CID9113M	CID9115M	CID9116M	C109117M	CID9118M	CID9119M
DESCRIPTION					Auger	Bit Hex				
SIZE	4"	6"	9"	12"	15"	18"	20"	24"	30"	36"

### **AUGER BIT ROUND**

	C109136M	CID9137M	CID9138M	C109139M	CID9140M	CID9142M	C109143M	CID9144M	CID9145M
DESCRIPTION				1	Auger Bit round	i			
SIZE	6"	9"	12"	15"	18"	20"	24"	30"	36"

### TREE BIT HEX & SHAFT EXTENSION

	CID9124M	CID9125M	CID9126M	CID9127M	C109132M		
DESCRIPTION		Tree B	Tree Bit Hex				
SIZE	18"	24"	24" 30" 36"				

### TREE BIT ROUND & SHAFT EXTENSION

	CID9128M	CID9129M	CID9130M	CID9131M	C109133M
DESCRIPTION		Tree Bi	Shaft Extension Round		
SIZE	18"	24"	30"	36"	36"

### **ROCK AUGER BIT HEX & SHAFT EXTENSION**

	CID9169M	C109147M	C109146M	CID9182M	CID9990M	C109174M
DESCRIPTION			Rock Auger Bit Hex			
SIZE	6"	9"	12"	18"	24"	36"

### **ROCK AUGER BIT ROUND & SHAFT EXTENSION**

	C109153M	C109163M	C109148M	CID9149M	C109181M	C109183M	
DESCRIPTION			Rock Auger Bit Round				
SIZE	4"	6"	9"	12"	18"	24"	





### **4-WAY / 6-WAY**

DOZER BLADES



Our X-treme 4-Way and 6-Way Dozer Blades are an excellent tool for grading. Easily cut a road, level ground for building, or cut a ditch. The dozer blade comes with an electric over hydraulic valve to operate the tilt function of the blade. Only one set of auxiliary hydraulics are needed.

# DOZER BLADE


	4WD72-S	4WD84-S	4WD96-S
DESCRIPTION		4-WAY Dozer Blade	
PRODUCT	4WD72	4WD84	4WD96
WORKING WIDTH	72"	84"	96"
MATERIAL THICKNESS		1/4" Moldboard	
CYLINDER SIZE		3-1/2" x 4"	
CUTTING EDGES	Replaceable 1/2" AR400	Replaceable 1/2" AR401	Replaceable 1/2" AR402
WEIGHT (LBS)	835	853	860

	6WD72	6WD84	6WD96			
PRODUCT FAMILY		6-WAY Dozer Blade				
PRODUCT	6WD72	6WD84	6WD96			
WORKING WIDTH	72"	84"	96"			
MATERIAL THICKNESS		1/4" Moldboard				
CYLINDER SIZE		3-1/2" x 4"				
WIRING HARNESS OPTIONS		Wiring Harness required to operate Universal, 7pin, 8pin, or 14 pin				
CUTTING EDGES	Replaceable 1/2" AR403	placeable 1/2" AR403 Replaceable 1/2" AR404				
WEIGHT (LBS)	971	1055	1076			



### MINI ROTARY TILLERS

The Mini Skid Steer Rotary Tiller is a perfect attachment for tilling gardens and small fields. It's also great for deer hunters to use to make food plots with ease. These tillers have a bi-directional rotation and can till ground up to 6" deep.

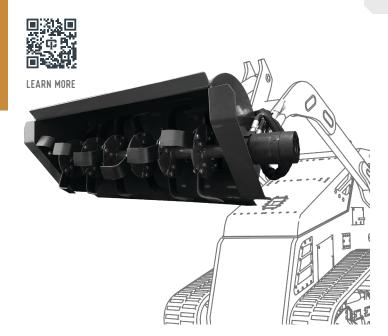

# ROTARY TILLER

	MINITIL44-S	MINITIL44-MTSO			
DESCRIPTION	Mini Rotary Tiller	Mini Rotary Tiller for MT50			
PRODUCT	MINITIL44	MINITIL44-MT50			
DESCRIPTION	MINI TILLER I	LOW FLOW 44"			
PLATE THICKNESS	1/4" Plate ( Rolled Housing)				
FLOW REQUIREMENT (GPM)	10-20	GPM			
TILLING DEPTH	6	211			
WORKING WIDTH	4	4"			
WEIGHT (LBS)	561				
NOTES	2-3/8" tine rod, bolt on replaceab	le tines, 3/8" sides with 3/8" shoes.			







# X-TREME ROTARY TILLERS

The X-treme Rotary Tiller is a perfect attachment for tilling gardens and small fields. It's also great for deer hunters to use to make food plots. This tiller has a bidirectional rotation and can till ground up to 6"deep. We manufacture two configurations of rotary tillers. We make a low flow single motor tiller that runs between 14-20 GPM. We also make a high flow tiller with a dual motor system that runs 20-40 GPM.

	XTLF72-S	XTHF72-S	XTHF84-S		
DESCRIPTION		X-Treme Skidsteer Rotary Tiller			
PRODUCT	XTLF72	XTHF72	XTHF84		
WORKING WIDTH	72"	72"	84"		
FLOW REQUIREMENT (GPM)	14-20 GPM	20-40 GPM			
MOTOR	Single Parker Motor w/ internal relief valve	Dual Parker Motors w/ internal relief valves			
HOSES	3/4" Machine Hoses				
PLATE THICKNESS	1/4" Plate ( Rolled Housing)				
WEIGHT (LBS)	780	801	907		
NOTES	Bolt on replaceable tines, 3/8" sides with 3/8" thick shoes				



### BOX SCRAPE

Our Box Scrape Ripper is perfect for reconditioning gravel roads and driveways. The rippers will resurface the buried gravel and the cutting edges will smooth out and level the gravel. You can drive forward or backwards, simply remove the rippers and rotate them.



LEARN MORE



	BSR72-S	BSR78-S	BSR84-S			
DESCRIPTION		Box Scrape Ripper				
PRODUCT	BSR72	BSR78	BSR84			
WORKING WIDTH	72"	78"	84"			
CUTTING EDGES		Replaceable				
WEIGHT (LBS)	847	880	907			
NOTES	Shanks are replaceable					



# X-TREME RIPPER

Our Ripper is great for ground penetration. Easily prep a garden or till up some land with the ripper. The tines are adjustable for more or less ground penetration.

	XR72-S	XR78-S	XR84-S
DESCRIPTION		X-Treme Ripper	
PRODUCT	XR72	XR78	XR84
WORKING WIDTH	72"	78"	84"
WEIGHT (LBS)	347	369	372
NOTES	Adjustable tines & optional finishing rake		



## LAND

Our land leveler are available in 72", 78", and 84" widths and are used to cultivate, grade, cut, and mainly level land. This attachment is not designed to transfer large amounts of dirt. The land leveler is specifically used for leveling jobs such as dirt roads and gravel driveways.











	LL72-S	LL78-S	LL84-S
DESCRIPTION		Land Leveler	
PRODUCT	LL72	LL78	LL84
WORKING WIDTH	72"	78"	84"
CUTTING EDGES	Replaceable		
WEIGHT (LBS)	425	497	515

### MINI LAND LEVELER

	MINILL36-S	MINILL36-MT50	MINILL44-S	MINILL44-MTSO
DESCRIPTION	Land Leveler	MT50	Land Leveler	MT50
PRODUCT	MINILL36	MINILL36-MT50	MINILL44	MINILL44-MT50
WORKING WIDTH	3	6"	4	4"
WEIGHT (LBS)	135		149	
NOTES	44"Also available for MT51			





## SEVERE DUTY

ROOT RAKE

The IronCraft Root Rake is excellent for rolling debris into tight piles for easy burning. It will easily remove large rocks, roots, and other objects on or below the surface. The Severe version features 3/4" AR400 tines placed on 6" centers, rated for machines with a horsepower of 75 or higher.

	SVRR72-S	SVRR84-S	SVRR96-S			
DESCRIPTION		Severe Duty Root Rake				
PRODUCT	SVRR72	SVRR84	SVRR96			
WORKING WIDTH	72"	84"	96"			
TINE SPACING		Spaced on 6" Centers				
TINE THICKNESS		5/8"				
HP REQUIRED	R	Recommended for 75 HP and above machines				
WEIGHT (LBS)	572	663	750			



### X-TREME

**ROOT RAKE** 

The IronCraft Root Rake is excellent for rolling debris into tight piles for easy burning. It will easily remove large rocks, roots, and other objects on or below the surface. The X-treme Version features top quality 5/8" Steel Tines placed on 6" centers, rated for machines with a horsepower of less than 75. The Severe version features ¾" AR400 tines placed on 6" centers, rated for machines with a horsepower of 75 or higher.



LEARN MORE



# ROOT RAKE

	XRR66-S	XRR72-S	XRR84-S	XRR96-S	
DESCRIPTION		X-Treme Root Rake			
PRODUCT	XRR66	XRR72	XRR84	XRR96	
WORKING WIDTH	66"	72"	84"	96"	
TINE SPACING	Spaced on 6" Centers				
TINE THICKNESS	3/4" AR400				
HP REQUIRED	Recommended for machines up to 75 HP				
WEIGHT (LBS)	450	484	554	622	

### MULTI-PURPOSE

POWER RAKE

The IronCraft 4-N-1 Power Rake is an innovative landscape tool that combines a 4N1 bucket along with a power rake. No longer will you have to change attachments to finish preparing the soil bed. You can now use your rake for back dragging, digging, and grappling. Offered in various widths and sizes for full size machines to mini skid steer. The Multi-Purpose Power Rake comes stock with a smooth edge, with the option for a Bolt on Edge or welded teeth.

# POWER RAKE

	MPPR72	MPPR78	MPPR84			
DESCRIPTION		4-N-1 Multi-Purpose Power Rake				
PRODUCT	MPPR72	MPPR78	MPPR84			
WORKING WIDTH	72"	78"	84"			
DRUM SIZE	7.	7-1/2" w/ carbide roller tips (10-1/4" tip to tip)				
MOTOR		Direct Drive Motor				
FLOW REQUIREMENT (GPM)		15-25 GPM				
CYLINDER SIZE		2-1/2" x 8" dual cylinders				
WIRING HARNESS OPTIONS	Wiring Harness required to operate Universal, 7pin, 8pin, or 14 pin					
NOTES		1-1/4" Pivot Pins & Side Cutters Standard				



### X-TREME

**POWER RAKE** 

The IronCraft X-treme Power Rake provides a versatile tool for your skid steer attachments, in a manual or hydraulic version. The X-treme Power Rake will provide the proper preparation of seedbed grading, leveling and re-conditioning of multiple surfaces. The X-treme Power Rake uses a 16-26 GPM motor inset within the drum. This unique feature ensures the motor does not extend past the width of the rake, eliminating damage to the motor due to accidental collisions. The Xtreme Power Rake's bi-directional drum features carbide teeth and removable side plates. The floating design ensures the rake will remain level during operation.











	XPWRM72-S	XPWRM90-S	XPWR72	XPWR90	
DESCRIPTION	X-Treme Power R	ake Manual Angle	X-Treme Power Rake		
PRODUCT	XPWRM72	XPWRM90	XPWR72	XPWR90	
WORKING WIDTH	72"	90"	72"	90"	
WIRING HARNESS OPTIONS			Universal, 7pin, 8pin or 14pin		
WEIGHT (LBS)			1041	1142	
MOTOR	Inset Direct Drive Motor				
WHEEL TYPE	Solid Foam Filled Tires				
GUARDING OPTIONS	Front & Back Debris Curtain				







### X-TREME MANURE FORK GRAPPLE

Our X-treme Manure Fork Grapple is an excellent piece of equipment to have on the farm. Whether moving bales of hay or cleaning up after storm damage, you will find many uses for the manure fork grapple. Strong 2" cold rolled steel is used on the bottom tines.

# FORK GRAPPLE

	XMFG72-S	XMFG78-S	XMFG84-S		
DESCRIPTION		X-Treme Manure Fork Grapple			
PRODUCT	XMFG72	XMFG78	XMFG84		
WORKING WIDTH	72"	78"	84"		
TINE THICKNESS		2" cold rolled steel			
CYLINDER SIZE		2" x 10"			
HP REQUIRED	F	Recommended for machines 55 HP and above			
WEIGHT (LBS)	877	897	954		



## COMPACT TRACTOR MANURE FORKS



LEARN MORE

These forks are useful for manure and general pick up of materials when you only want to pick up the item and not the soil around it. The tines slide in through the front and are pinned from the rear.



# MANURE FORK

	CTMF72-S
DESCRIPTION	Compact Manure Forks
PRODUCT	CTMF72
WORKING WIDTH	72"
TINE THICKNESS	1-1/2" cold rolled steel
HP REQUIRED	Recommended for machines under 55 HP
WEIGHT (LBS)	371





### X-TREME MANURE FORK

These forks are useful for manure and general pick up of materials when you only want to pick up the item and not the soil around it. The tines slide in through the front and are pinned from the rear.



FORESTRY

WORKING

FORKS

# MANURE FORK

	XMF72-S	XMF78-S	XMF84-S		
DESCRIPTION		X-Treme Manure Forks			
PRODUCT	XMF72	XMF78	XMF84		
WORKING WIDTH	72"	78"	84"		
TINE THICKNESS		2" cold rolled steel			
HP REQUIRED	F	Recommended for machines 55 HP and above			
WEIGHT (LBS)	596	646	696		



### MINI PALLET FORKS



LEARN MORE

Our Mini Skid Steer Pallet Forks fit the Dingo, Boxer, Ramrod, Ditch Witch, and Thomas. Rated at 2,800 lbs. These are Class 1 fork tines.



# MINI PALLET

	DPFF-36	MTFF-36	OPFF-42	MTFF-42	
DESCRIPTION	Mini Pallet Forks				
PRODUCT		DPFRAME			
FORK TINE LENGTH	36"		42"		
MOUNT OPTIONS	Dingo	MT50	Dingo	MT50	
LOAD CAPACITY	2800 lbs				
WEIGHT (LBS)	269	269	305	305	



### STANDARD

PALLET FORKS

Anyone that owns a skid steer should have a set of forks on hand. Forks are ideal for lifting pallets, loading lumber or just about anything else. Our forks are 1–3/8 inches thick, 4 inches wide and 42, or 48 inches long. They are completely heat treated and rated to carry 3,000 lbs. We put a step on both sides of our frames so the operator can easily climb into the cab.

## PALLET

	SDFF-48
DESCRIPTION	Standard Duty Frame Only
PRODUCT	SDFF
FORK TINE LENGTH	48"
FORK MATERIAL	Heat Treated
MOUNT OPTIONS	SSL
LOAD CAPACITY	4,000 lbs
WEIGHT (LBS)	345



### HEAVY DUTY

FORKS & FRAME

Our Heavy Duty Forks are 1-3/8 inches thick, 4 inches wide and 48 inches long. They are completely heat treated and rated to carry 4,000 lbs. We put a step on both sides of our frames so the operator can easily climb into the cab.



# FORK & FRAME

	HDFF-48	HDFFSSOO-48	HDFFSSOO-60	HDFFSSOO-72		
DESCRIPTION	Heavy Duty CLASS II Pallet Forks		Heavy Duty CLASS LL Pallet Forks			
PRODUCT	HDFF	HDFF5500	HDFF5500-60	HDFF5500-60		
FORK TINE LENGTH	48"	48"	60"	72"		
FORK MATERIAL	Heat Treated					
MOUNT OPTIONS		SSL				
LOAD CAPACITY	4,000 lbs	5,500 LBS				
WEIGHT (LBS)	365	385				









## X-TREME DUTY FORKS & FRAME

Our X-treme Duty Forks are 1-3/4 inches thick, 5 inches wide and 48 inches long. They are completely heat treated and rated to carry 8,500 lbs. We put a step on both sides of our frames so the operator can easily climb into the cab.

	XDFF-48	XOFF-60	XDFF-72		
DESCRIPTION	X-Treme Duty Class III (iii) Frame Only	X-Treme Duty Class II (ii)			
PRODUCT	XDFF				
FORK TINE LENGTH	48"	60"	72"		
FORK MATERIAL	Heat Treated				
MOUNT OPTIONS	SSL				
LOAD CAPACITY	8,500 lbs				
WEIGHT (LBS)	508				



#### HYDRAULIC FORKS & FRAME

Our Heavy Duty Forks are 1-3/8 inches thick, 4 inches wide and 48 inches long. They are completely heat treated and rated to carry 4,000 lbs. We put a step on both sides of our frames so the operator can easily climb into the cab.













	HHDFF-S	HHOFFSSOO-S	WTHHDFF-S	HWTFFSSOO-S	HXDFF-S	
DESCRIPTION	Hydraulic Heavy Duty Pallet Forks		Hydraulic Heavy Duty Walk Thru Pallet Forks		Hydraulic X-Treme Duty Pallet Forks	
PRODUCT	HHDFF	HHDFF5500-S	WTHHDFF	HWTFF5500	HXDFF	
FORK TINE LENGTH		48"				
FORK MATERIAL	Heat Treated					
MOUNT OPTIONS		SSL				
LOAD CAPACITY	4,000 lbs	5,500 LBS	4,000 lbs	5500 LBS	8,500 lbs	
CYLINDER SIZE	1-1/2" x 16"					
WEIGHT (LBS)	411			415		





### HEAVY DUTY

WALK THRU FORKS & FRAME

Our walk-through frame is exactly what it says. Instead of having to climb around or over the fork back frame, simply walk through it. This added convenience will make jobs go faster and easier whether you are lifting pallets, loading lumber or just about anything else. Our forks are 1-3/8 inches thick, 4 inches wide, completely heat treated, 48 inches long and rated to carry 4,000 lbs.










	WTFF-48	WTFF5500-48	WTFF5500-60	WTFF5500-72		
DESCRIPTION	Walk Thru Frame Only	Class Ii Forks & Frame				
PRODUCT	WTFRAME	WTFF5500-48	WTFF5500-60	WTFF5500-72		
FORK TINE LENGTH	48"	48"	60"	72"		
FORK MATERIAL	Heat Treated					
MOUNT OPTIONS		SSL				
LOAD CAPACITY	4,000 lbs - 48" Forks Only (5,500 LBS)					
WEIGHT (LBS)	338	437				
NOTE	Optional 5,500 lb capacity. 60" & 72" forks available with 5,500 lb capacity only.					



#### MINI GRAPPLE RAKE

The mini skid steer Grapple Rake is ideal for raking up debris. The shape of the grapple rake makes it easy to roll debris into tight piles if you are planning to burn. We use twin 2" by 6" stroke cylinders, rated at 3,000 psi to handle the toughest jobs.





LEARN MORE

	MINIGROC44-S	
DESCRIPTION	Mini Grapple Rake 44" FOR MINI	
PRODUCT	MINIGRDC44	
MATERIAL THICKNESS	3/8" top quality steel	
CYLINDER SIZE	2" x 6" - 3000 PSI	
WORKING WIDTH	44"	
WEIGHT (LBS)	252	





### STANDARD

GRAPPLE RAKE

Our Grapple Rakes are ideal for raking and loading debris. A single grapple or two independent grapples are available. We use American-made cylinders, rated at 4,000 psi, to handle the toughest jobs. Unique design makes it easy to roll debris into tight piles

BUCKET

FORESTRY

WORKING

FORKS

PLES

EQUIPMENT

	ARSGR66-S	ARSGR72-S	
DESCRIPTION	Standard Duty Grapple Rake		
PRODUCT	ARSGR66	ARSGR72	
WORKING WIDTH	66"	72"	
MATERIAL THICKNESS	3/8" AR400 Steel		
CYLINDER SIZE	2" x 6" 4,000 PSI American Made		
RPM	Recommended for machines 35-60 HP		
WEIGHT (LBS)	425	550	



### HEAVY DUTY

**GRAPPLE RAKE** 

Our Grapple Rakes are ideal for raking and loading debris. The shape of the grapple makes it easy to roll debris into tight places. We use American-made cylinders, rated at 4,000 psi, to handle the toughest jobs. Our Heavy Duty Rakes and X-treme Grapple Rakes are built with ½" top-quality steel and are rated for 50-70 HP machines.



LEARN MORE



	HDGR66-S	HDGR72-S	HDGR78-S	HDGR84-S	HDGR96-S	
DESCRIPTION		Heavy Duty Grapple Rake				
PRODUCT	HDGR66	HDGR72	HDGR78	HDGR84	HDGR96	
WORKING WIDTH	66"	72"	78"	84"	96"	
CYLINDER SIZE		2" x 10" 4,000 PSI				
RPM	Recommended for 50-70 HP machines					
WEIGHT (LBS)	814	874	888	955	1056	





### SEVERE DUTY

**GRAPPLE RAKE** 




Our Grapple Rakes are ideal for raking and loading debris. The shape of the grapple makes it easy to roll debris into tight places. A single grapple or two independent grapples are available. We use American-made cylinders, rated at 4,000 psi, to handle the toughest jobs.

	SVGR72-S	SVGR84-S		
DESCRIPTION	Severe Duty Gr	apple Rake		
PRODUCT	SVGR72	SVGR84		
WORKING WIDTH	72"	84"		
RPM	Recommended for 80 HP and above machines			
WEIGHT (LBS)	1392	1481		
NOTE	Oversized pins and bushings, single or dual grapples available, & oversized step for ease of entering machine			




## X-TREME GRAPPLE RAKE WITH TEETH

Our Grapple Rakes are ideal for raking and loading debris. The shape of the grapple makes it easy to roll debris into tight places. A single grapple or two independent grapples are available. We use American-made cylinders, rated at 4,000 psi, to handle the toughest jobs.

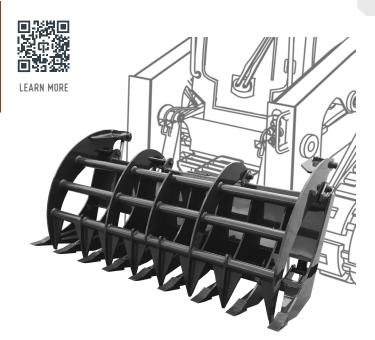

	XGRG6T-S	XGR72T-S	XGR78T-S	XGR84T-S	
DESCRIPTION	X-Treme Duty Grapple Rake with teeth				
PRODUCT	XGR66T	XGR72T	XGR78T	XGR84T	
WORKING WIDTH	66"	72"	78"	84"	
MATERIAL THICKNESS	1/2" top quality steel				
CYLINDER SIZE	2" x 10" 4,000 PSI				
RPM	Recommended for 65 HP and above machines				
WEIGHT (LBS)	863 942 954 1031				
NOTES	23 Series Teeth Standard and has a full 51" opening				



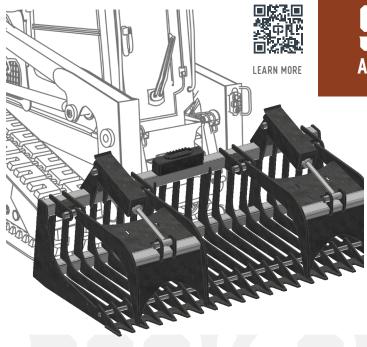

AND MINI ROCK GRAPPLE

The IronCraft Rock Grapples are great for sifting through dirt in order to remove rocks and debris. The Standard Rock Grapple has dual cylinders and works with 45-60 HP machines.

	SDROKGVT72-S	SDROKGVT78-S	
DESCRIPTION	Standard Duty Rock Grapple		
PRODUCT	SDROKGVT72	SDROKGVT78	
WORKING WIDTH	72"	78"	
CYLINDER SIZE	2" bore x 10" stroke		
RPM	Recommended for 45-60 HP machines		
WEIGHT (LBS)	653 674		
NOTES	Welded Front Teeth Standard		

#### MINI ROCK GRAPPLE BUCKET

	MTROKG36-S	DROKG44-S	MTROKG44-S	
DESCRIPTION	MT50	DINGO	MT50	
PRODUCT	MTROKG36	DROKG44	MTROKG44	
SIZE	36"	44"		
CYLINDER SIZE		2" x 4-1/2"		
RPM	264	352	323	

WORKING

FORKS

GRAPPLES



## HEAVY DUTY ROCK GRAPPLE

回沙部 湖中級 高級領

LEARN MORE

With our Heavy Duty Rock Grapple you can also pick up large rocks, logs, brush or just about anything else by use of the grapples. We use twin 2" bore by 10" stroke cylinders rated at 4,000 psi on all of our grapples. The rock grapple comes standard with 3/4 x 6 cutting edge and is upgraded to 1 x 8 edge when optional teeth are added. Up to 65 HP.



## ROCK GRAPPLE

	HDROKG72-S	HDROKG78-S		
DESCRIPTION	Heavy Duty 1	Heavy Duty Rock Grapple		
PRODUCT	HDROKG72	HDROKG78		
WORKING WIDTH	72" 78"			
TINE SPACING	2-3/8"			
TINE THICKNESS	5/8"			
WEAR BARS & SIDE EDGE	Bolt or	Bolt on Sides		
CYLINDER SIZE	2" x 10" rate	2" x 10" rated at 4000 PSI		
CUTTING EDGES	3/4" x 6"			
WEIGHT (LBS)	900 941			
TEETH	Teeth optional			





### X-TREME DUTY

ROCK GRAPPLE

Our X-Treme Rock Grapple has tines set at 3" apart, allowing you to pick up most everything but the dirt. You can also pick up large rocks, logs, brush or just about anything else by use of the grapples. We use twin 2" bore by 10" stroke cylinders rated at 4,000 psi on all of our grapples. 65 HP and up.

BUCKET

FORESTRY

WORKING

FORKS

RAPPLES

## ROCK GRAPPLE

	XROKG72-S	XROKG78-S	XROKG84-S	
DESCRIPTION		X-treme Duty Rock Grapple		
PRODUCT	XROKG72	XROKG78	XROKG84	
WORKING WIDTH	72"	78"	84"	
TINE SPACING		3"		
TINE THICKNESS		5/8"		
WEAR BARS & SIDE EDGE		Bolt on Sides		
CYLINDER SIZE		2" x 10" rated at 4000 PSI		
WEIGHT (LBS)	1064	1110	1160	
NOTES		Fully Welded Front Teeth Standard		



#### MINI ROOT GRAPPLE

Our Mini Skid Steer Root Grapple is perfect for the compact tractor. They are built strong yet very light weight.



	DRG36-S	MTRG36-S	DRG44-S	MTRG44-S
DESCRIPTION	DINGO	MT50	DINGO	MT50
PRODUCT	DRG36	MTRG36	DRG44	MTRG44
WORKING WIDTH	36"		44	"
CYLINDER SIZE	2" x 4-1/2"			
WEIGHT (LBS)	278	286	245	297







## STANDARD ROOT GRAPPLE

Our Standard Duty Grapple is built from 3/8" thick steel plate on the top and bottom, and incorporates 3" square tubing.


	SRGGG-S	SRG72-S	
		ORO/ D O	
DESCRIPTION	Standard Duty	y Root Grapple	
PRODUCT	SRG66	SRG72	
WORKING WIDTH	66"	72"	
THICKNESS OF SQUARE TUBING	3"		
PLATE THICKNESS	3/8"		
CYLINDER SIZE	2" bore x	10" stroke	
RPM	Recommended for 35-45	Recommended for 35-45 HP and under machines	
WEIGHT (LBS)	559	583	
NOTES	Hydraulic lines routed inside the tubing to prevent tears, optional spacer tines		



### HEAVY DUTY

**ROOT GRAPPLE** 

One feature that separates our Standard and Heavy Duty Root Grapples from our competitor's attachments is that we offer optional bolt on cylinder rod covers to protect the hydraulic cylinder shafts. Most root grapples only have the actual cylinder enclosed and not the shaft. We give you the option to protect both. Anyone that has had debris fall on the cylinder shaft knows what damage this can cause. (Image shown with optional spacer tines)

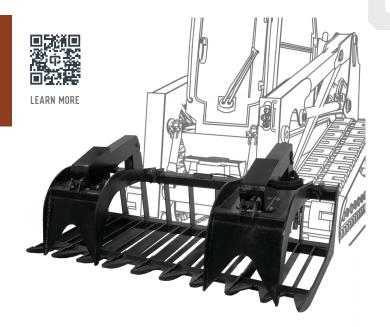

	HDRG66-S	HDRG72-S	HDRG78-S	HDRG81-S
DESCRIPTION		Heavy Duty Root Grapple		
PRODUCT	HDRG66	HDRG72	HDRG78	HDRG81
WORKING WIDTH	66"	72"	78"	81"
THICKNESS OF SQUARE TUBING	3"			
PLATE THICKNESS	1/2"			
CYLINDER SIZE		2" bore x 10" stroke		
RPM		Recommended for 45-65 HP machines		
WEIGHT (LBS)	631	668	680	742
NOTES	Hydraulic lines routed inside the tubing to prevent tears, optional spacer tines			





### SEVERE DUTY

ROOT GRAPPLE




The IronCraft Severe Root Grapple is ideal for machines over 80 HP that require the strongest root grapple available. It boasts 5/8" continuous bottom tines and 3/4" top tines. Oversized pins and bushings, protected hoses, and cylinders with American made hydraulics.

	SVRG72-S	SVRG84-S	
DESCRIPTION	Severe Duty Root Grapple		
PRODUCT	SVRG72	SVRG84	
WORKING WIDTH	72"	84"	
TINE THICKNESS	5/8" bottom tines & 3/4" top tines		
RPM	Recommended for machines 80 HP and above		
WEIGHT (LBS)	1074	1144	
NOTES	Oversized pins and bushings, protected hoses and cylinders w/ American made hydraulics		



#### X-TREME ROOT GRAPPLE

The X-treme Root Grapple is the grapple of choice for those who need an attachment that will hold up in severe applications. It can handle more material and is more rugged that our other grapples. It's built from 5/8" thick steel plate on the top, 1/2" on bottom, and incorporates 4" square tubing. It also features enclosed hydraulic cylinders and shafts.

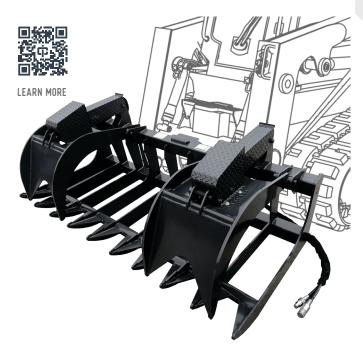

	XRG72-S	XRG78-S	XRG84-S	
DESCRIPTION	X-Treme Duty Root Grapple			
PRODUCT	XRG72	XRG78	XRG84	
WORKING WIDTH	72"	78"	84"	
THICKNESS OF SQUARE TUBING	4"			
PLATE THICKNESS		5/8" top plate & 1/2" bottom plate		
CYLINDER SIZE	2" bore x 10" stroke			
RPM	R	Recommend for machines 65 HP and above		
WEIGHT (LBS)	911	920	969	
NOTES	Hydraulic lines ro	Hydraulic lines routed inside the tubing to prevent tears, optional spacer tines		



#### MINI GRAPPLE BUCKET

The Mini Skid Steer Grapple Bucket is a versatile and great choice for anyone who owns a mini skid steer. Easily pick up logs, rock, left over building material or any other type of debris. They are built with top quality steel, have 2" bore by 10" stroke fittings at every pivot point. Every unit exceeds the lifting capacity of the machine it is attached to.

BUCKETS

FORESTRY

WORKING

FORKS

GRAPPLES

EQUIPMENT

EQUIPMEN

EQUIPMEN

## GRAPPLE

	DGB36-S	DGB44-S	MTGB36-S	MTGB44-S	
DESCRIPTION	Mini Grapple B	ucket for Dingo	Mini Grapple Bucket for MT50		
PRODUCT	DGB36	DGB44	MTGB36	MTGB44	
WORKING WIDTH	36"	44"	36"	44"	
CYLINDER SIZE		2" x 4-1/2"			
WEIGHT (LBS)	368	355	328	330	
TEETH		Optional weld on teeth			
NOTES	Grease fittings at every pivot point. 44" also available for MT52				



### HEAVY DUTY

**GRAPPLE BUCKET** 

All of our grapple buckets have 2" bore by 10" stroke cylinders, with all hydraulic lines routed inside the tubing to prevent tears. They are also built with top quality steel, oversized points and bushings, with grease fittings at every pivot point. Every unit exceeds the lifting capacity of the skid steer machine it is attached to.



LEARN MORE



# GRAPPLE

	HDGB66-S	HDGB72-S	HDGB78-S	HDGB81-S	
DESCRIPTION		Heavy Duty Grapple Bucket			
PRODUCT	HDGB66	HDGB72	HDGB78	HDGB81	
WORKING WIDTH	66"	72"	78"	81"	
CYLINDER SIZE		2" x 10" 4,000 PSI			
RPM		Recommended for tractors up to 65 HP			
WEIGHT (LBS)	775	804	850	866	
TEETH	Optional weld on teeth				
NOTES	Grease fittings at every pivot point, bolt on sides standard, bolt on cylinder rod cover kit, and bolt on edge				







## X-TREME GRAPPLE BUCKET

Our Grapple Buckets are very versatile attachments. They're all great choices for anyone who owns a skid steer. Available in a wide range of sizes, they easily pick up logs, rocks, left over building supplies or any other type of debris.

BUCKETS

WORKING

FORKS

	XGB72-S	XGB78-S	XGB84-S	XGB96-S		
DESCRIPTION		X-Treme Gr	apple Bucket			
PRODUCT	XGB72	XGB78	XGB84	XGB96		
WORKING WIDTH	72"	78"	84"	96"		
TINE THICKNESS		5/8" top tines				
CYLINDER SIZE		2" x 10" 4,000 PSI				
RPM	Recommended for 65 HP and above machines					
CUTTING EDGES		1" x 8"				
WEIGHT (LBS)	1071	1098	1154	1266		
TEETH	Teeth optional on all sizes except 96"					
NOTES	Hydraulic lines o	Hydraulic lines on top & routed inside the tubing to prevent tears, grease fittings at every pivot point, bolt on sides standard, optional weld on teeth and bolt on edge.				



## DOUBLE ADJUSTABLE BALE SPEAR



LEARN MORE

Our Double Adjustable Bale Spear is very useful around the farm. It can be adjusted to pick up 2, 4, 5, and 6 foot bales of hay, and is rated at 2,800 lbs per spear.



## BALE SPEAR

	DHBABS-S	
DESCRIPTION	Double Adjustable Bale Spear	
PRODUCT	DHBABS	
LOAD CAPACITY	2,800 lbs	
BALE CAPACITY	Two 4', 5' or 6'	
WEIGHT (LBS)	402	
NOTES	Spears are adjustable	



#### HIGH BACK HAY SPEAR

Our High Back Hay Spear is designed to increase your leverage and safety when rolling the bales back towards the cab. Hay Spears easily move bales of hay with a quick hook up on your skid steer or tractor. Euro style and John Deere mounts are available.







	HBHS-S	DHBHS-S	THBHS-S	QUADHBHS-S		
DESCRIPTION	High Back	Double High Back	Triple High Back	Quad High Back		
PRODUCT	HBHS	DHBHS	THBHS	QUADHBHS		
MOUNT OPTIONS	SSL					
SPEAR LENGTH		42"				
SPEAR SPACING		Fixed 32", 36", or 40"				
WEIGHT (LBS)	217	233	259			
NOTES	Quad High Back Hay Spear not shown					



#### LOW BACK HAY SPEAR

Our Hay Spear is an excellent piece of equipment to have on the farm. Easily move bales of hay with a quick hook up on your skid steer or tractor. The Economy Hay Spear is rated at 2,800 lbs, while the rest are rated at 3,500 lbs. Euro Style and John Deere mounts are available.











	LBHS-S	OLBHS-S	TLBHS-S	QUADLBHS-S		
DESCRIPTION	Low Back	Double Low Back	Triple Low Back	Quad Low Back		
PRODUCT	LBHS	DLBHS	TLBHS	QUADLBHS		
MOUNT OPTIONS		SSL				
SPEAR LENGTH	49"	49"	49"	49"		
SPEAR SPACING		Fixed 32", 36", or 40"				
LOAD CAPACITY		2,800 lbs				
WEIGHT (LBS)	186	203	233			

#### HAY BALE ACCUMULATOR GRAPPLE HAY EQUIPMENT





## BALE HAY ACCUMULATOR GRAPPLE

The Accumulator Grapple allows one man and a skid steer to gather 8 to 10 square bales, grapple them, lift and off load to a trailer. No need for multiple pieces of equipment, this is all operated from inside the skid steer using the Accumulator Grapple. Sides and dividers can be removed for more efficient grappling.

# ACCUMULATOR

	HAGIO-S
DESCRIPTION	10 Bale Hay Accumulator Grapple
PRODUCT	HAG10
BALE CAPACITY	8-10 square bales
CYLINDER SIZE	2" x 6"
WEIGHT (LBS)	1075
NOTES	9" Grapple Hooks, Radial Bearings, and adjustable width sides standard

BUCKETS

FORESTRY

WORKING

FORKS

GRAPPLES

EOUIPMENT



## HAY BALE GRAPPLE BUCKET

LEARN MORE

Our Hay Grapple Bucket is a large capacity bucket with a grapple. Used for gathering broken bales of hay, straw, silage and other light material.



# HAY BALE

	HBGB72-S	HBGB84-S	HBGB96-S			
DESCRIPTION		Hay Bale Grapple Bucket				
PRODUCT	HBGB72	HBGB84	HBGB96			
SIZE	72"	72" 84"				
BUCKET WRAP		1/4"				
CYLINDER SIZE	2" x 10"					
CUTTING EDGES	3/4" x 6"					
WEIGHT (LBS)	1079	1364				
NOTES	Grease fittings at every hinge point, optional bolt on edge					





## X-TREME DUTY HAY BALE SQUEEZER

Our X-treme Bale Squeezer is great for anyone moving and stacking large quantities of hay. It features twin 2 1/2" x 8" cylinders with a holding capacity of 2,800 lbs. This attachment can also stack two bales at a time and handles 4, 5 or 6 foot bales.

	XBS-S
DESCRIPTION	X-Treme Duty Bale Squeezer
PRODUCT	XBS
LOAD CAPACITY	2,800 lbs
BALE CAPACITY	4', 5', or 6'
CYLINDER SIZE	Twin 2-1/2" x 8"
WEIGHT (LBS)	608



#### MINI SNOW PUSHER

Our Mini Skid Steer Snow Pusher allows you to clear a parking lot quicker than a snow plow. It comes in a 48" width or a 60" width.



### GNNW DIIGHFD









	CTSPUSH48-D	CTSPUSH48-MT50	CTSPUSH60-D	CTSPUSH60-MTS0			
DESCRIPTION	Mini Snow	Pusher 48"	Mini Snow Pusher 60"				
PRODUCT	CTSPU	CTSPUSH48		JSH60			
WORKING WIDTH	4	48"		0"			
MOUNT OPTIONS	Dingo	MT50	Dingo	MT50			
WEAR BARS & SIDE EDGE		5/16"	sides				
WEIGHT (LBS)			309				
SKID SHOES	Replaceable 1/2" AR400						
NOTES		1-1/2" x 8" Replaceable rubl	1-1/2" x 8" Replaceable rubber edge, optional pull back				







## X-TREME SNOW PUSHER


Our X-treme Snow Pusher allows you to clear a parking lot quicker than a snow plow. The snow pusher edge is 1–1/2" thick x 8" wide, adjustable, reversible and replaceable rubber so you won't tear up the pavement. The mold board is 1/4" and the sides are 3/8" thick for extra support.

	SPUSH72-S	SPUSH84-S	SPUSH96-S	SPUSH108-S	SPUSH120-S		
DESCRIPTION		X-Treme Snow Pusher					
WORKING WIDTH	72"	84"	96"	108"	120"		
PRODUCT	SPUSH72	SPUSH84	SPUSH96	SPUSH108	SPUSH120		
WEAR BARS & SIDE EDGE		3/8" sides an	d 1-1/2" x 8" replaceable	rubber edge			
WEIGHT (LBS)	775	836	971	985	1052		
REPLACEABLE SKID SHOES	Replaceable 3/4" AR401	Replaceable 3/4" AR402	Replaceable 3/4" AR404	Replaceable 3/4" AR405	Replaceable 3/4" AR406		
NOTE	Bucket Lip Mount available and optional pull back						



### HEAVY DUTY

Our Heavy Duty Snow Plow is the same basic design of our X-treme Snow plow but without the extra roll top. This design allows the operator to have better visibility while plowing. Easily Angle the plow from inside the cab.

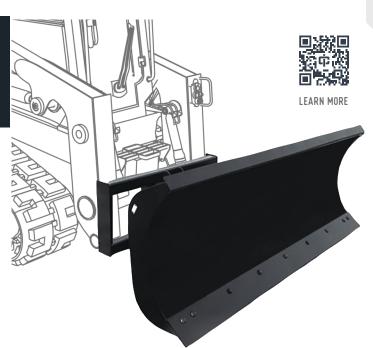

SNNW PI NW

	HOSPLOWM72-S	HOSPLOWM84-S	HDSPLOWM96-S	HOSPLOWM108-S			
DESCRIPTION		Manual Heavy Duty Snow Plow					
PRODUCT	HDSPLOWM72	HDSPLOWM84	HDSPLOWM96	HDSPLOWM108			
CYLINDER SIZE		3" ɔ	۲ 6"				
WORKING WIDTH	72"	84"	96"	108"			
ANGLE ADJUSTMENT		30 Degrees					
CUTTING EDGES		1/2" AR400 bolt on					
WEIGHT (LBS)	732	776	825	928			
SKID SHOES		Adjustable					
NOTES		Available with rubber edge and manual angle					

	HDSPLOW72-S	HDSPLOW84-S	HDSPLOW96-S	HDSPLOW108-S	HDSPLOW120-S
DESCRIPTION		Ну	draulic Heavy Duty Snow	Plow	
PRODUCT	HDSPLOW72	HDSPLOW84	HDSPLOW96	HDSPLOW108	HDSPLOW120
CYLINDER SIZE			3" x 6"		
WORKING WIDTH	72"	84"	96"	108"	120"
ANGLE ADJUSTMENT			30 Degrees		
CUTTING EDGES			1/2" AR400 bolt on		
WEIGHT (LBS)	720	776	815	843	953
SKID SHOES	Adjustable				
NOTES	Available with rubber edge and manual angle				





#### X-TREME SNOW PLOW

Our X-treme Snow Plow allows you to efficiently clear driveways and parking lots. Easily angle the plow from within your cab, using the 3" x 6" hydraulic cylinder. The top of the plow is rolled to keep the snow from coming back towards the cab. It's 1/2" bolt on cutting edge and adjustable snow shoes are standard. 144" model is hydraulic only.

Easily Angle the plow from inside the cab, Also available in manual adjustment



SNOW PLOW

	X-TREME SNOW PLOW - ALL MODELS
CYLINDER SIZE	3" x 6"
ANGLE ADJUSTMENT	30 Degrees
CUTTING EDGES	1/2" AR400 bolt on
SKID SHOES	Adjustable


	XSPLOW84-S	XSPLOW96-S	XSPLOW108-S	XSPLOW120-S		
DESCRIPTION	Hydraulic X-Treme Snow Plow					
PRODUCT	XSPLOW84	XSPLOW96	XSPLOW108	XSPLOW120		
WORKING WIDTH	84"	96"	108"	120"		
WEIGHT (LBS)	857	948	1062	1180		

	XSPLOWM84-S	XSPLOWM96-S	XSPLOWM108-S	XSPLOWM120-S		
DESCRIPTION	Manual X-Treme Snow Plow					
PRODUCT	XSPLOWM84	XSPLOWM96	XSPLOWM108	XSPLOWM120		
WORKING WIDTH	84"	96"	108"	120"		



## SNOW CANNONT

The X-treme Snow Cannon for skid steers offers a 14" auger and single stage hydraulic blower. Other features include an electric controlled gear drive chute and 180 degree rotating deflector so the operator can change directions on the fly.

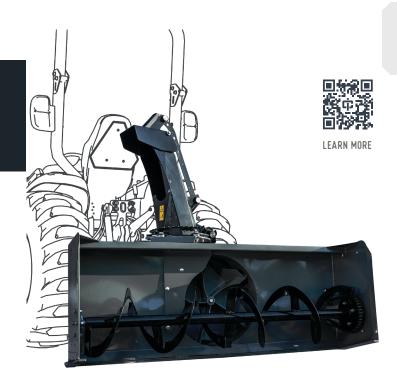

## SNOW BLOWERS

	SBLOW72	SBLOW78	SBLOW84	
PRODUCT	SBLOW72	SBLOW78	SBLOW84	
WIRING HARNESS OPTIONS		Universal, 14pin, 8pin, 7pin		
WORKING WIDTH	72"	72" 78" 84"		
WEIGHT (LBS)	741	803	865	
CHUTE ROTATION	180 Degrees			
FLOW REQUIREMENT (GPM)	15-25 GPM			
NOTES	Optional Chute Deflector			





### HYDRAULIC

BREAKER/HAMMER

Hydraulic Breakers are the ultimate attachment to demolish rock, asphalt, or concrete. They stand out for their superior impact power, coupled with a low noise design, ensuring efficient operation. An easy to change control valve promotes hasslefree maintenance. Designed for noise reduction and prevention of internal vibration. Works on material surface with vertical impact advantage for breaking stone and other materials.









	CBRM-SS-650	CBRM-SS-850	CBRM-SS-1000	CBRM-SS-1200	
DESCRIPTION		Hydraulic Skid Steer Breaker/Hammer			
WEIGHT (LBS)	618	772	1124	1324	

#### MINI SKID STEER BREAKER/HAMMER

	CBRM-D-225	CBRM-D-500	
DESCRIPTION	Hydraulic Mini Skid Steer Breaker/Hammer		
WEIGHT (LBS)	269	419	




### POST

The IronCraft Post Driver is a dependable post driving attachment for operators looking to get the job completed in a timely manner for an excellent cost. These breaker style post drivers use a proven nitrogen charged power cell, steel plate frame, and high strength steel domed head to put posts in the ground on pace with any competing attachment. Offered in the skid steer or excavator mounts, ready to go when received.



LEARN MORE

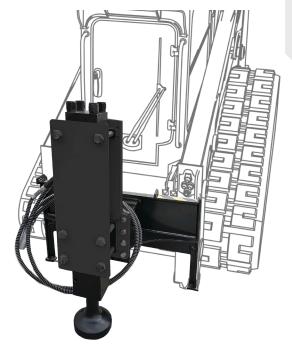

### onet nolveo









	PDM-SS-750	PDM-SS-1000
DESCRIPTION	Breaker Style Post Driver	X-Treme Post Driver 1000
PRODUCT	PD750	PD1000
FLOW RANGE (GPM)	13-24 GPM	
MAX PRESSURE (PSI)	2200 PSI	
WEIGHT (LBS)	1168	800
ENERGY CLASS	1150 lb	
MINIMUM LIFT CAPACITY	2500 lbs	
BLOWS PER MINUTE	400-800	
DOMED DRIVER HEAD INNER DIAMETER	8"	
STEEL PLATE THICKNESS	3/4"	







## SOD ROLLER

This attachment is used to assist in laying down rolls of sod. It is an essential tool for those doing lawn renovations and new home construction. Its simple design requires no hydraulics whatsoever. The strong tubular frame handles rolls of sod up to 48" wide and 60" in diameter, and requires fiber or plastic cored rolls.

BUCKET

FORESTRY

DIRT WORKING

FORKS

GRAPPL

FOLIDMENT

SNOW

EQUIPMEN

## ROLLER

	SR-S
DESCRIPTION	Sod Roller
PRODUCT	SR
SOD ROLL SIZE	48" & 60" in diameter
WEIGHT (LBS)	231
NOTES	Requires fiber or plastic cored rolls



## PICK UP



LEARN MORE

The Pickup Broom allows for added efficiency while cleaning. Whether sweeping dirt, light snow, or other debris; our Pickup Broom will easily tackle the job. The 8" Hub and 26" wafers sweep material into the bucket, and the manual hinging broom allows for easy transfer and disposal. Our Pickup Broom has adjustable height to allow for different scenarios and wear. Replaceable Bolt on Edge included.



## PICK UP

	PUBROOM72-S	PUBROOM84-S		
DESCRIPTION	Pick Up Broom (11-20 GPM)			
PRODUCT	PUBROOM72 PUBROOM84			
SIZE	72" 84"			
HUB SIZE	8"			
WAFER MATERIAL	Poly, Wir	Poly, Wire, or Mix		
WEIGHT (LBS)	1133 1276			



### **EXTREME**

BROOM

Gone are the days of brooms with more downtime than uptime! Land every bid, clean every road. Now replace your bristles with our new slide on bristle feature. Trust our redesigned hood to keep debris away from bystanders. We've even increased bristle count by 50%! Get yours today and take your sweeping to a whole new level!

Picture shows a 10" core with a 32" bristle.









	XHAB72	XHAB84	XHAB96	XMAB72	XMAB84	XMAB96
DESCRIPTION		Hyrdraulic			Manual	
SIZE	72"	84"	96"	72"	84"	96"
PRODUCT	XHAB72	XHAB84	XHAB96	XMAB72	XMAB84	XMAB96
BRISTLE QUANTITY	44	50	56	44	50	56
WEIGHT (LBS)	912 lbs	1,029 lbs	1,101 lbs	912 lbs	1,029 lbs	1,101 lbs
GPM		10-25				
BRISTLE TYPE		All Poly				
BROOM ANGLES		30 degrees Left or Right				
CORE	8" Core 26" Bristle					



#### MINI BOOM POLE




LEARN MORE

The X-treme Boom Pole is an essential tool for anyone in the landscaping or nursery industry. Easily pick up trees to be planted, transported or loaded. The boom is constructed from 1/4" thick 3" x 3" tubing and is rated to carry 3,000 lbs.





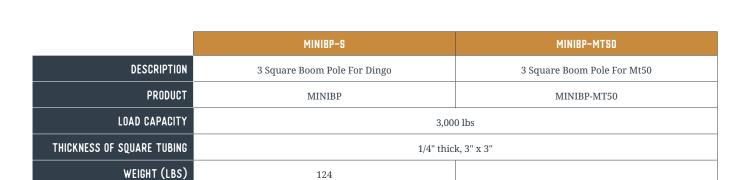





I FARN MORE



### TELESCOPIC

BOOM POLE

This hydraulically driven pole allows for easy transportation of your items, with the ability to extend your height by 72". The pole has a 4×4 base with 3/8" thick walls. The hydraulic extension arm is constructed from 3×3 tubing, and the manual extension from 2×2 tubing. The Arm is rated to carry 1200 lbs, with an angle limitation of 45 degrees. The manual extension arm can be positioned in 2 different height locations, one at 12" and the other at 24".

	TBP-S	
DESCRIPTION	Telescopic Boom Pole	
PRODUCT	TBP	
EXTENSION HEIGHT	UP TO 72"	
LOAD CAPACITY	1,200 lbs	
CYLINDER SIZE	2-1/2" x 48"	
WEIGHT (LBS)	503	
NOTES	16" Extended arm set at 40 degrees, 2-1/2" hole in bracket for strapping chains or hooks	



## SQUARE BOOM POLE



LEARN MORE

The X-treme Boom Pole is an essential tool for anyone in the landscaping or nursery industry. Easily pick up trees to be planted, transported or loaded. The boom is constructed from 1/4" thick 3" x 3" tubing and is rated to carry 3,000 lbs.

**NOTES:** You also have the option of ordering it with an extended 4 x 4 tube boom pole.



## BOOM POLE

	XBP-S	BP-S
DESCRIPTION	4 Square Boom Pole	3 Square Boom Pole
PRODUCT	XBP	ВР
LOAD CAPACITY	3,00	0 lbs
THICKNESS OF SQUARE TUBING	1/4" thick, 4" x 4"	1/4" thick, 3" x 3"
WEIGHT (LBS)	173	151
NOTE	You also have the option of ordering it	with an extended 4 x 4 tube boom pole.





FARN MORE

**DESCRIPTION** 

WEIGHT (LBS)

**PRODUCT** 



SSTQ-S

SKID STEER TO QUICKIE

SSTQ

138

## CONVERSION

Your pin on tractor can easily be converted to a skid steer quick attach. All we require are a few simple measurements. For those that have John Deere loaders or Euro loaders, we also make a conversion to attach to your loader which enables you to use skid steer attachments.

SSTMTSO-S

SKID STEER TO MT 50

SSTMT50

Other hook ups available.

#### KETS

CUTTERS &

WOR!

GRAPPLE

EQUIPMENT

SNOW

#### DINGO CONVERSIONS

SKID STEER CONVERSIONS

SSTD-S

SKID STEER TO DINGO

	DTSS-S	OTMTSO-S
DESCRIPTION	DINGO TO SKID STEER	DINGO TO MT 50
PRODUCT	DTSS	DTMT50
WEIGHT (LBS)	149	108

#### MT50 CONVERSIONS

	MTSOTSS-S	MTSOTO-S
DESCRIPTION	MT 50 TO SKID STEER	MT 50 TO DINGO
PRODUCT	MT50TSS	MT50TD

#### **BLANK CONVERSIONS**

	BTSS-S	
DESCRIPTION	BLANK TO SKID STEER	
PRODUCT	BTSS	
WEIGHT (LBS)	196	



#### HITCHES

RECEIVER, GOOSE NECK & 3 POINT



LEARN MORE

#### RECEIVER HITCH

Our receiver hitch makes it easy to move trailers around the yard using your skid steer. While it uses the same ball mounts you use in your other vehicles, hooking up only takes a fraction of the time required to hook a trailer to your truck.

#### 3-POINT HITCH

The IronCraft 3-Point Hitch is handy to have around the farm. Simply drive your skid steer up to the implement, hook it up and go. No need to get your tractor out, just to move some attachments around.



	RH-S	GNRH-S	3PTQAP-S	3PTQAPCAT2-S
DESCRIPTION	Receiver Hitch	Goose Neck Receiver Hitch W/ 2 5/16	3 Point Hitch Cat 1	3 Point Hitch Cat 2
PRODUCT	RH	GNRH	3PTQAP	3PTQAPCAT2
WEIGHT (LBS)	97	111	154	251
NOTES	Available in Cat 1 or Cat2			






## OUICK ATTACH




With the IronCraft Universal Skid Steer Quick Attach plate, you can easily convert your existing attachment to the universal skid steer hook up. Simply weld or bolt the quick attach plate to the implement you wish to convert. Our standard quick attach steel plates are 1/4" thick and are solid across the back.

# QUICK ATTACH

	QAPLT3/8-S
DESCRIPTION	3/8" Quick Attach Plate
PRODUCT	QAPLT3/8
WEIGHT (LBS)	113
NOTES	We can also make the steel plates thicker for different applications

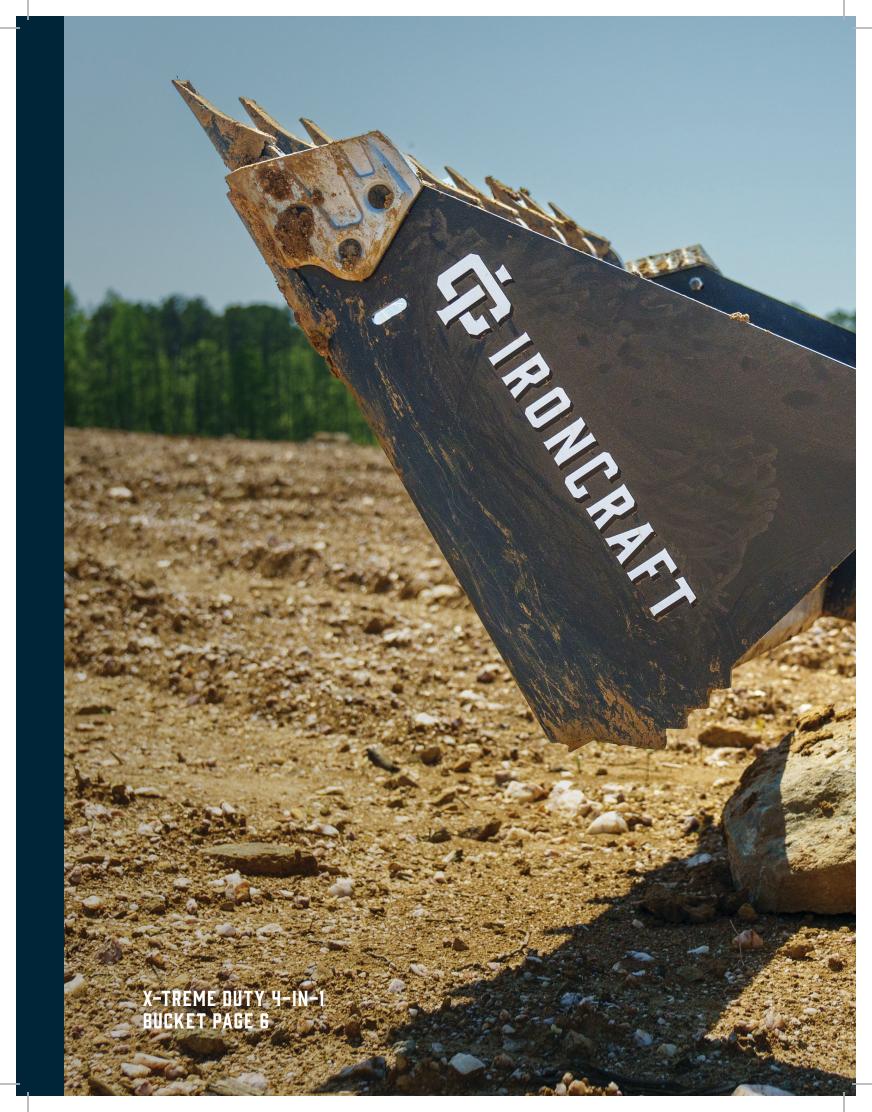

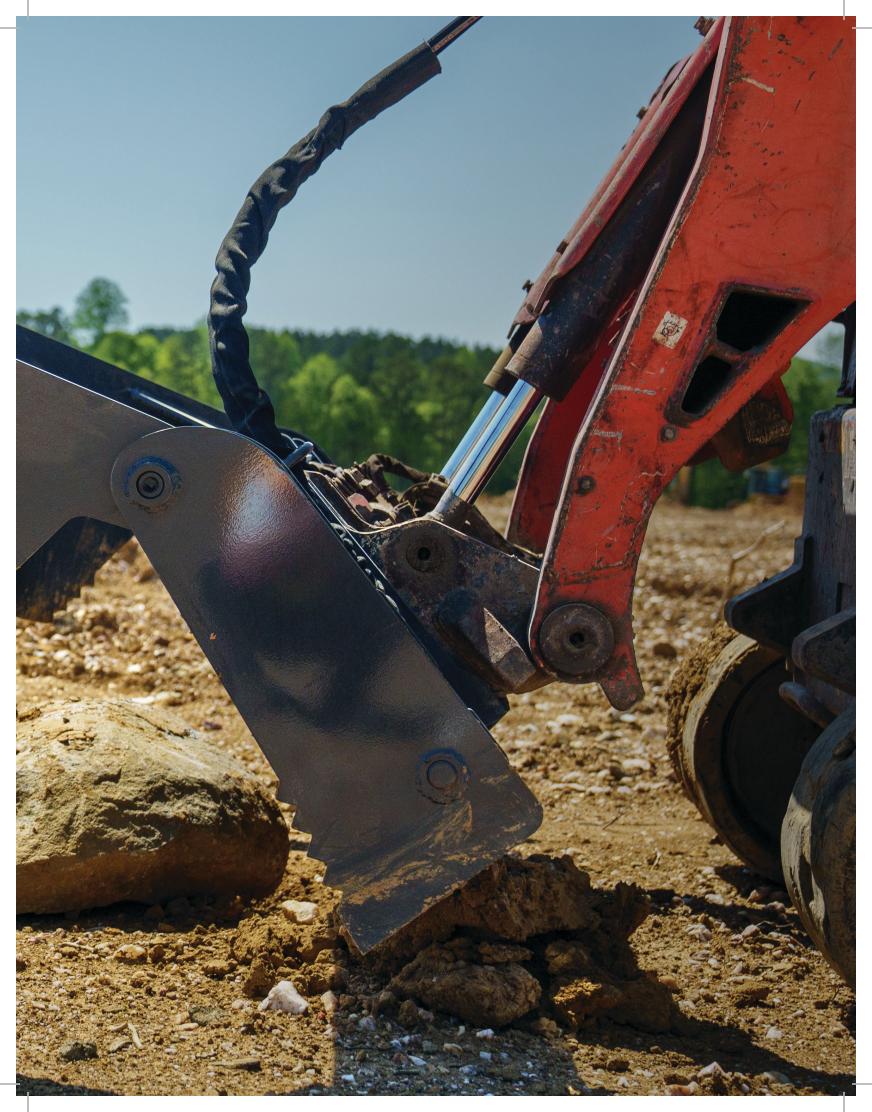

# Forging Shead

7 ROCKY MT RD

Athens, Tennessee 37303

- (P) 423-405-5150
- (F) 423-405-5904

WWW.IRONCRAFTUSA.COM

@IRONCRAFTUSA



