

Tomahawk 500FS

Drum machine feed slide

Teagle



SUITABLE FOR: Processing short material for TMR, Cubicles, Poultry Bedding or Biomass


No. round bales	No. rect bales	No. rect bales
(max. 62")	(48" x 28")	(48" x 48")
2	2	1

Milling system

The rear hydraulically angled slide allows constant material feed when the mill is operating in a stationary position. Output is increased up to 4 t/hr by eliminating stopping and starting of the drum / machine to load the bale.



SEE THE NEW FEED SLIDE IN ACTION

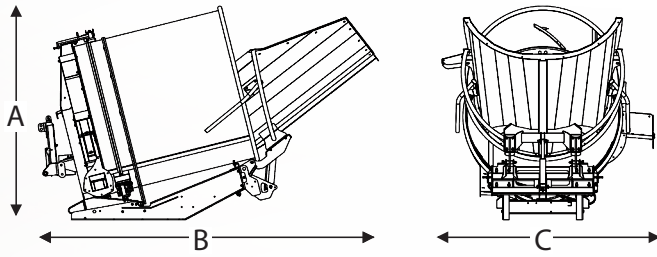

SPECIFICATIONS

500FS SERIES

Maximum Round Bale Diameter	62"
Maximum Rectangular Bale Size	48" x 48"
Overall height (A)*	102"
Drum Diameter	72"
Drum Length (standard)	73"
PTO power required**	120HP

Mill

505FSM

Overall Length (B)	162"
Transport width (C)**	80"
Operating width (C)	123"
Lower Chute discharge height*	22"
Upper Chute discharge height*	50"
Straw Giraffe discharge height*	72"
Weight	3055 lbs

Silage

5050FS

Overall Length (B)	162"
Transport width (C)**	81"
Operating width (C)****	95"
Lower Chute discharge height*	22"
Upper Chute discharge height*	54"
Silage Giraffe discharge height*	60"
Weight	2840 lbs

Turbo Mill

T500BFMSM

Overall Length (B)	170"
Transport width (C) fan no RHC	100"
Operating width (C) fan with RHC open	122"
Lower Chute discharge height*	22"
Upper Chute discharge height*	50"
Weight	4030 lbs



Key: * Working heights will increase by up to 36" depending on tractor **Typical tractor size to provide adequate lifting capacity and stability *** Chute extensions not fitted **** No optional left hand chute fitted

The company's policy is one of continuous improvement and development, therefore specifications are subject to change without prior notice.

teaglemachinery.com   

Toll Free: 1-855-383-2453 1-855-3TEAGLE

FSLIDE11B0BB US

Teagle Machinery Ltd | Blackwater, Truro, Cornwall TR4 8HQ | salesna@teagle.co.uk