

# 2022

# RENEGADE® SPORT

Value-oriented with exceptional handling, bump capability and light off-trail riding.



RENEGADE® SPORT  
600 EFI SHOWN

RENEGADE® SPORT  
600 ACE™ SHOWN

## // PACKAGE HIGHLIGHTS

- Rotax® 600 ACE™ with 420W magneto and 600 EFI engines available
- HPG™ rear shock
- 4.5 in. digital display
- RAS™ 3 front suspension
- SC™-5M rear suspension
- Standard electric start
- Glove box with 4 L/1 gal of storage
- Low windshield (14 in.)
- D.E.S.S.™ key (600 ACE™)
- Brembo brake with braided stainless-steel brake line
- Ergo-step side panels
- U-shaped aluminum handlebar with integrated J-hooks
- Pilot 5.7 skis
- NEW standard with two sets of LinQ attachment points

ROTAX® ENGINE	600 EFI	600 ACE™
Engine details	Liquid-cooled, two-stroke	Liquid-cooled, four-stroke D.O.H.C., dry sump
Horsepower	85	62
Cylinders – Displacement	2 – 599.4 cc	2 – 600 cc
Bore – Stroke	72.3 mm – 73 mm	74 mm – 69.7 mm
Carburation	EFI	EFI
Fuel type – Octane	Regular unleaded – 87	Regular unleaded – 87
Fuel tank	36 L/9.5 US gal	36 L/9.5 US gal
Oil tank capacity	3.4 L/3.6 qt	2.1 L/2.2 qt

POWERTRAIN	600 EFI	600 ACE™
Drive clutch	pDrive™ with slider shoes	eDrive™ II
Driven clutch	QRS	QRS
Drive sprocket pitch	73 mm/2.86 in.	73 mm/2.86 in.

DRY WEIGHT	600 EFI	600 ACE™
Dry weight	200 kg/442 lb	213 kg/469 lb


DIMENSIONS	600 EFI	600 ACE™
Overall vehicle length	3,038 mm/119.6 in.	3,038 mm/119.6 in.
Overall vehicle width	1,217 mm/47.9 in.	1,217 mm/47.9 in.
Overall vehicle height	1,267 mm/49.9 in.	1,267 mm/49.9 in.
Ski stance	1,077 mm/42.4 in.	1,077 mm/42.4 in.
Track	Cobra:	
(Length x Width x Profile)	137 x 15 x 1.25 in.	

COLOR
Sunburst Yellow / Black 

SUSPENSION	
Front suspension	RAS™ 3
Front shock	Motion Control
Front suspension travel	220 mm/8.7 in.
Rear suspension	SC™-5M
Center shock	Motion Control
Rear shock	HPG™
Rear suspension travel	245 mm/9.6 in.

FEATURES	
Frame	REV® Gen4
Bodywork	Narrow design (2-stroke engines) Wide design (4-stroke engines)
Skis	Pilot™ 5.7
Seating	Trail performance (2-stroke engines) Trail with storage (4-stroke engines)
Handlebar	U-shaped aluminum with J-hooks
Riser block height	120 mm/4.7 in.
Starter	Electric
Reverse	RER™ (600 EFI) Mechanical (600 ACE™)
Brake system	Brembo brake with stainless-steel braided brake line
Heated throttle lever/grips	Standard
Gauge type	4.5 in. digital display
Windshield	360 mm/14 in.
Runner – Carbide	Square 3/8 in – 4 in.
Bumpers (front/rear)	Std/Std


## // FEATURE HIGHLIGHTS

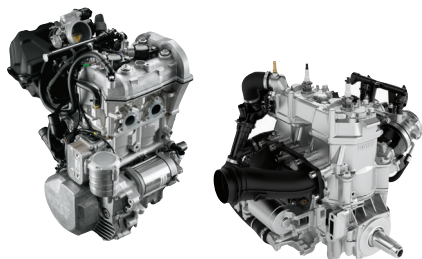

### 1 Rotax® 600 ACE™ and 600 EFI engines

Two easy-to-own, reliable and fuel-efficient choices. 60 hp\* (600 ACE) or 85 hp\* (600 EFI) versions ensure great performance and an incredible value.

\*Observed HP metric based on internal dyno test in optimal conditions.

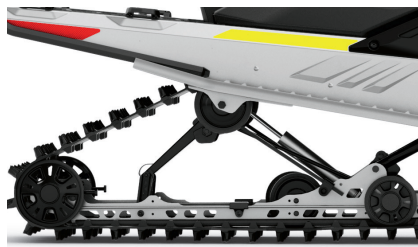

### 2 HP6™ rear shock

High-quality KYB high-pressure gas shock for excellent performance and reliability.

### 3 Electric start

Saves time and energy, adding immense value for the rider.



RENEGADE® SPORT  
600 EFI SHOWN



### 4 Ergo-step side panels

Design offers natural progression to three natural positions for different cornering styles, including a new, extreme-forward position.



### 5 RAS™ 3 front suspension

Stable and precise front suspension design and geometry, optimized for the REV Gen4 platform.



### 6 Pilot™ 5.7 skis

Deliver outstanding grip and bite in corners with virtually no darting.

**ski-doo**

