


## Haulmark®

## WHEN RACING BECOMES MORE THAN A HOBBY

Are you ready for the big time? Then take a look at the EDGE® ALX Stacker trailers, designed for the motorsports professional and serious recreational enthusiast. Not only are EDGE® ALX Stackers large enough to haul multiple vehicles, but they have enough storage space for spare parts, tools and diagnostic equipment.

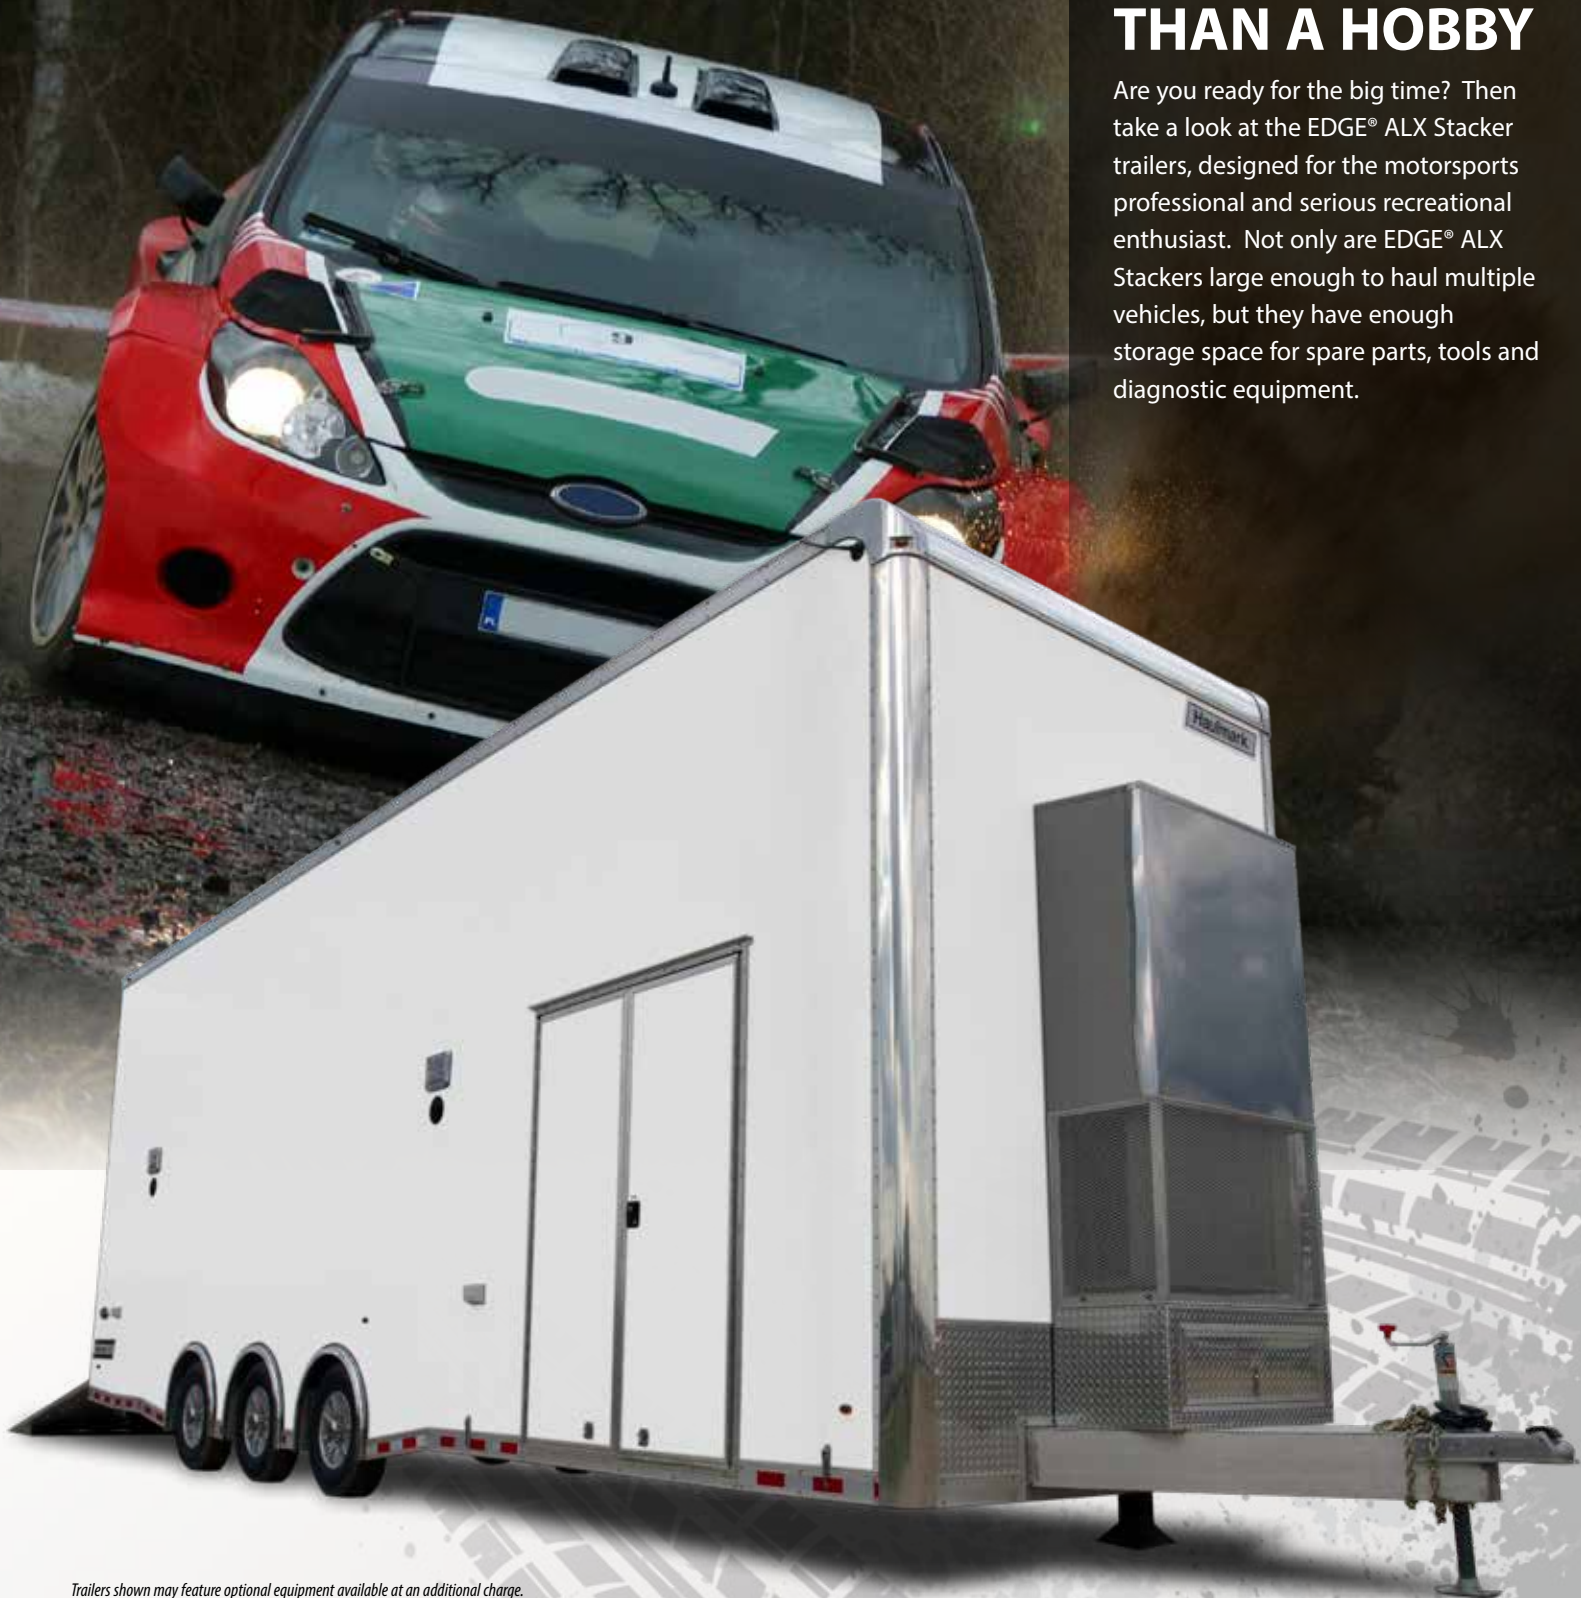

*Trailers shown may feature optional equipment available at an additional charge.*

**THE EDGE ALX**  
ALL ALUMINUM

# SPECIFICATIONS



|  |               | HARS85X24WR4  | HARS85X24WR5  | HARS85X28WR5  | HARS85X32WR5  |
|--|---------------|---------------|---------------|---------------|---------------|
| <b>Body:</b>                                     | <b>Length</b> | 24' 0"        | 24' 0"        | 28' 0"        | 32' 0"        |
|  | <b>Width</b>  | 8' 4"         | 8' 4"         | 8' 4"         | 8' 4"         |
| <b>Overall:</b>                                  | <b>Length</b> | 29' 0"        | 29' 0"        | 33' 0"        | 37' 0"        |
|  | <b>Width</b>  | 8' 6"         | 8' 6"         | 8' 6"         | 8' 6"         |
|  | <b>Height</b> | 13' 5"        | 13' 5"        | 13' 5"        | 13' 5"        |
| <b>Interior:</b>                                 | <b>Length</b> | 23' 8"        | 23' 8"        | 27' 8"        | 31' 8"        |
|  | <b>Width</b>  | 8' 0"         | 8' 0"         | 8' 0"         | 8' 0"         |
|  | <b>Height</b> | 11' 3"        | 11' 3"        | 11' 3"        | 11' 3"        |
| <b>Width Between Wheel Boxes</b>                 |               | 81"           | 81"           | 81"           | 81"           |
| <b>Platform Height</b>                           |               | 25"           | 25"           | 25"           | 25"           |
| <b>Auto Lift Length</b>                          |               | 13' 0"        | 13' 0"        | 16' 0"        | 16' 0"        |
| <b>Auto Lift Height</b>                          |               | 6' 8"         | 6' 8"         | 6' 8"         | 6' 8"         |
| <b>Torflex® Suspension E-Z Lube® Axles: Qty</b>  |               | Triple        | Triple        | Triple        | Triple        |
| <b>Electric Brakes with Breakaway Kit</b>        |               | Electric Drum | Electric Drum | Electric Drum | Electric Drum |
| <b>Radial Tire Size</b>                          |               | LT235/85R16   | LT235/85R16   | LT235/85R16   | LT235/85R16   |
| <b>Tire Load Range</b>                           |               | G             | G             | G             | G             |
| <b>Hitch Ball Size</b>                           |               | 2-5/16"       | 2-5/16"       | 2-5/16"       | 2-5/16"       |
| <b>Hitch Height to Top of Ball</b>               |               | 23"           | 23"           | 23"           | 23"           |
| <b>Hitch Weight (% of Curb Weight)</b>           |               | 10% - 15%     | 10% - 15%     | 10% - 15%     | 10% - 15%     |
| <b>GVWR</b>                                      |               | 18,000 lbs.   | 21,000 lbs.   | 21,000 lbs.   | 21,000 lbs.   |
| <b>Curb Weight (Approximate)</b>                 |               | 7,600 lbs.    | 8,750 lbs.    | 9,600 lbs.    | 10,700 lbs.   |
| <b>Payload Capacity (Approximate)</b>            |               | 10,400 lbs.   | 12,250 lbs.   | 11,400 lbs.   | 10,300 lbs.   |
| <b>Rear Ramp Door Opening - Width x Height</b>   |               | 92" x 96"     | 92" x 96"     | 92" x 96"     | 92" x 96"     |
| <b>Side Double Door Opening - Width x Height</b> |               | 48" x 72"     | 48" x 72"     | 60" x 78"     | 60" x 78"     |
| <b>12v Male Connection</b>                       |               | 7-way         | 7-way         | 7-way         | 7-way         |
| <b>Tube Main Rails</b>                           |               | 2" x 8"       | 2" x 8"       | 2" x 8"       | 2" x 8"       |

## STANDARD FEATURES

- Polished Aluminum Front Cap & Corners
- 1-Piece Aluminum Roof
- .040 Bonded Aluminum Exterior (No Screws)
- Spread Axles with Drop Skirting
- 24" ATP Stoneguard
- 8-Bolt 16" Radial Tires with Silver Viper Aluminum Wheels
- 2-5/16" Adjustable Height Coupler (25,000 lbs.)
- 12K Hydraulic Landing Gear with Manual Override
- 12v LED 9" x 7" Exterior Scene Lights (4)
- 3/4" PlexCore™ Decking with Black Coin Rubber Floor Covering
- 3/8" PlexCore™ Sidewall Liner with .030 White Aluminum Covering
- White Vinyl Ceiling Liner
- Cabinets: L-Shaped Base, Overhead and Generator Compartment
- Steel Car Hoist System with 36" Extension
- Bunk/Attic (6' 6" from Floor to Under Side of Bunk/Attic)
- 36" Aluminum Ramp Extension with Large Bumpers
- Generator Compartment with 48" x 32" Access Door
- Air Compressor Prep Package
- 120/240v 50 amp Motorbase Receptacle with Lock Connect
- 12v Main Shut Off Switch
- 12v LED 14" Surface Mount Ceiling Lights (8)
- 12v LED 6" Round Flush Mount Dome Lights (4)
- 16" OC Tube Crossmembers
- 16" OC Vertical Posts
- 16" OC Tube Roof Structure
- Marine Battery with Vented Interior Floor Mount Box
- D-Ring Tie-Downs with Welded Plates (4)
- 3-Year Limited Warranty



Trailers shown may feature optional equipment available at an additional charge.



GET MORE | GO FURTHER

[www.haulmark.com](http://www.haulmark.com)

Specifications, features, options, packages & pricing subject to change **without** notice. See your authorized Haulmark® dealer for more information.