

Read the manual completely before you use the trailer.




MARLON

Owner & Assembly Manual

www.marlonproducts.com

Safety Rules

Remember, any piece of equipment like an ATV trailer can cause injury if operated improperly or if the user does not understand how to operate the equipment. Exercise caution at all times when using your tow vehicle and tow trailer.

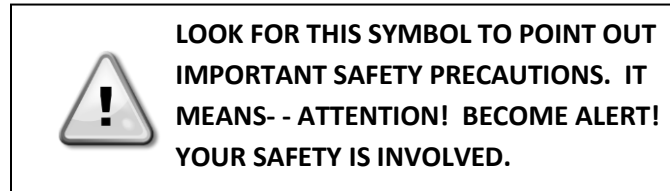

Please exercise caution at ALL times when using the trailer on your tow vehicle:

- **Make sure that the towing vehicle and the hitch on your vehicle is more than capable of towing the trailer. It is important to check your vehicle owner's manual for trailer ratings.**
- **Check that the trailer coupler is fastened securely onto the Towing vehicles ball. The trailer ball must a 2 inch ball.**
- **Inspect the trailer and all parts before use.**
- **Check to insure that all Wheel Bolts are tight. Torque to 80 ft.lbs. Re-tighten after the first 50 miles, or 80 kilometers.**
- **Check the tire pressure. Maximum 14 PSI when carrying the maximum rated load.**
- **Repack the wheel bearings every 2000 miles or 3200 kilometers or a minimum of once every year.**
- **Swivel Hitch may be needed to ensure safe turning when being pulled behind a motorcycle. Swivel hitches sold separately.**
- **Do not exceed the Gross Vehicle Weight Rating (G.V.W.R.) which is shown on the trailer serial / certification label.**
- **Balance and secure the load on the trailer. See the trailer loading section in this manual.**
- **Lubrication of the coupler, springs and the tilt mechanism should be done periodically to stop corrosion and keep parts moving freely.**

By following these simple instructions, you will maximize the life of your trailer and help safely transport your cargo.

WARNING!!!

DO NOT ABUSE THE TRAILER. The Marlon trailer performance is best if you follow the guidelines set forth in this manual. Do not force the Marlon trailer to do a job it is not designed for. Know your Marlon trailer; learn its limitations and applications.

- **KEEP CHILDREN AWAY.** Be sure children are kept a safe distance from the Marlon trailer operating area.
- **NEVER sit or ride on the Marlon trailer.** Serious injury or death could occur.



WARNING: VEHICLE BRAKING AND STABILITY MAY BE AFFECTED WITH THE ADDITION OF THIS TRAILER.



WARNING: Improper tire pressure can result in a blowout and loss of control, which can lead to death or serious injury. Be sure tires are inflated to pressure indicated on sidewall before towing.



WARNING: Lug nuts are prone to loosen after initial installation, and if improperly tightened can lead to death or serious injury.

- Check lug nuts for tightness on a new trailer or when wheel(s) have been remounted after the first 50 miles or 80 kilometers of use. Tighten lug nuts before each use.



WARNING: An overloaded trailer or improper distribution of load weight or shifting cargo can result in the loss of control of trailer, leading to death or serious injury.

- Do not exceed the trailer Gross Vehicle Weight Rating (GVWR)
- Tie down all loads with proper sized fasteners, ropes straps, etc.

Be sure to:

- Distribute the load front-to-rear and provide proper tongue weight;
- Distribute the load evenly, right and left to avoid tire overload; and
- Keep the center of gravity low.



WARNING: An improper coupled trailer can result in death or serious injury.

Do not tow trailer until:

- The coupler is secured and locked to hitch;
- The coupler is adjusted properly to fit the towing vehicle ball;
- Tires and wheels are checked;
- The trailer brakes (if applicable) are checked;
- The load is secured to the trailer; and
- The trailer lights are connected and checked.

MARLON

Assembly instructions for the Marlon ATV 700 Trailer




1. Cut open box be careful not to cut through box and damage the enclosed trailer finish.
2. Unpack your ATV Trailer. Keep cardboard for **step 4**.



3. Remove tailgate and with two people flip ATV trailer body upside down.



4. Place axel plate on body and use the flat part of the bolt for the inside of the trailer when bolting down. Then place tongue support at the front of the trailer and use two bolts to bolt it down.

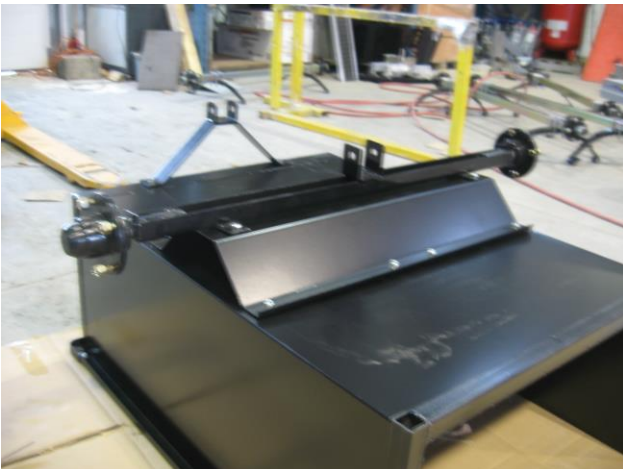

5. Attach axel to axel plate and bolt down tight.


6. Place tongue in the axel tongue brackets and in the tongue support.



7. Attach coupler to the end of the tongue using two bolts.



8. Remove caps from center of the hub lightly grease the zirks on the back of the hub until you see grease in the front of the hub

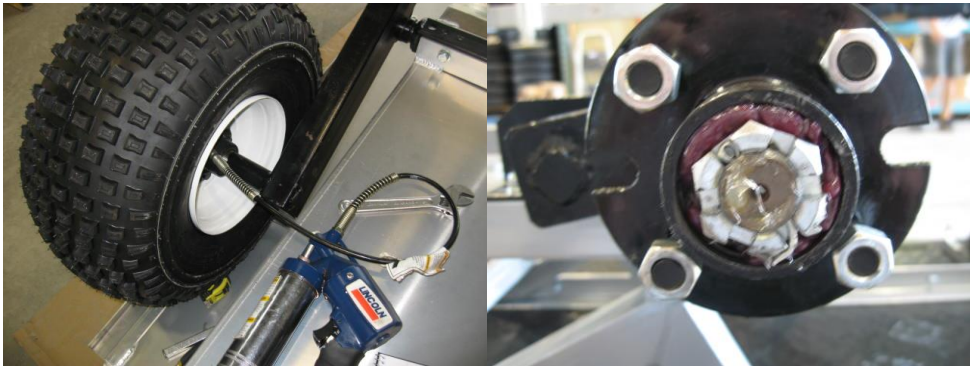

9. Inflate tires to the correct PSI & install on hubs, tighten with lug nuts. Then place water around the rim to check the bead for air leaks.



10. If you notice air bubbles you may have a slow leak. Take the tire and bounce it on even ground and test the rim once again with water to make sure the bead has sealed around the rim properly. Make sure to check both sides of the tire.



11. Place wheels over hubs and tighten lug nuts torque to 80 ft.lbs. Then with two people flip trailer over.



12. Then put your tailgate back in your trailer and your Marlon ATV 700 trailer is done ready to roll.



****Make sure to read all of owner's manual before using your Marlon AMT Trailer.**

www.marlonproducts.com