



PRODUCT ASSEMBLY INSTRUCTIONS:



www.wavearmor.com


Item # | Product Name: 302381 Lowered Deck to Floating Dock Connector Kit

Parts List:	Tools Needed:
1. Plastic Bottom Connector qty 2	1. Ratchet and 9/16" socket
2. Plastic Top/Deck Connector qty 1	2. 3/4" wrench
3. Aluminum Brackets qty 2	3. 3/4" socket and ratchet
4. 3/8 x 2" bolt qty 6, 3/8" lock washer qty 6, 3/8" heavy washer qty 6	4.
5. 1/2 x 4 1/2" U- bolt qty 4, 1/2" nut qty 20, 1/2" washer qty 8	5.
6. Also required is the Lowered Deck section (sold separately)	6.
7.	7.

Assembly Instructions:

1. Attach top deck section to the lower deck section as shown below. The bottom connectors will be at each end of the lowered deck. Secure with 3/8 x 2" bolts, lock washers and heavy washers.



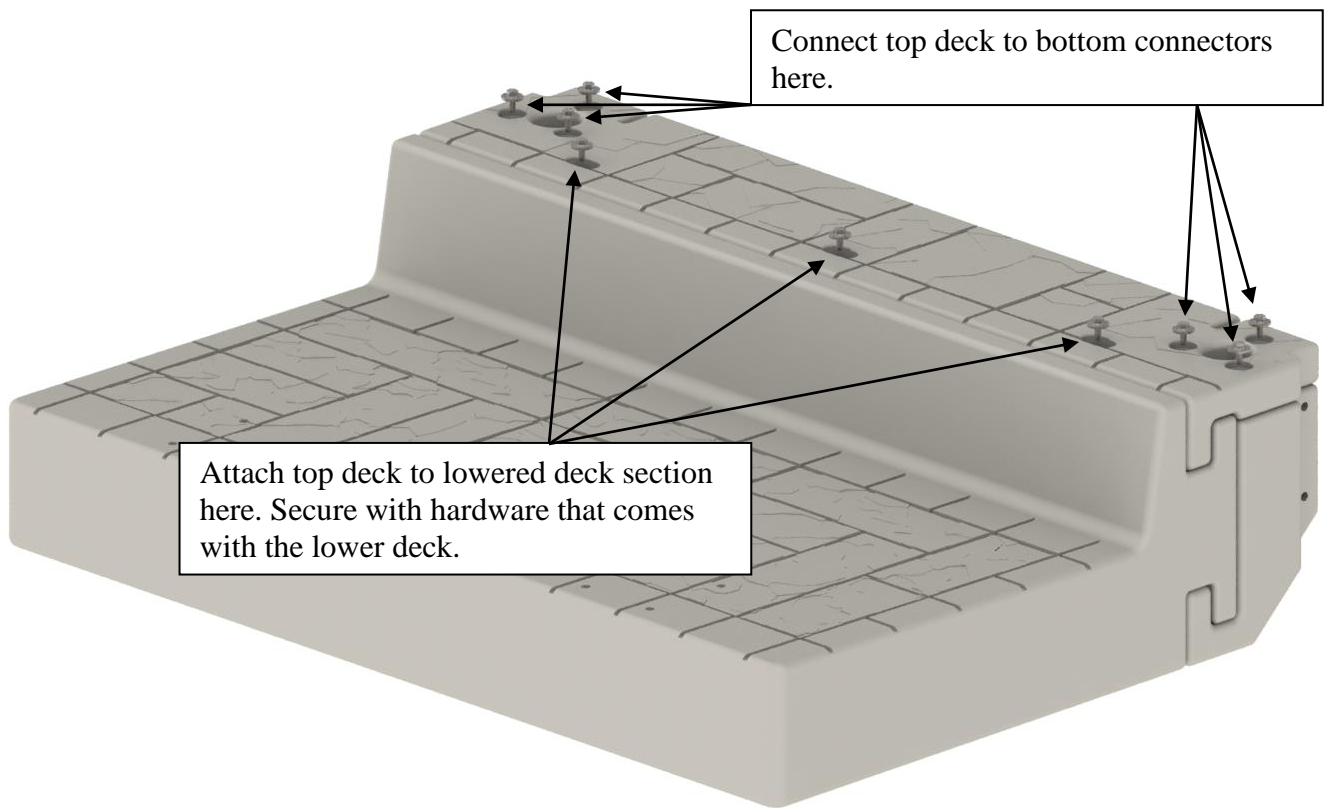

2. Attach aluminum brackets to the dock so they line up with the post holes in the lowered deck section. Secure pipes to the brackets as shown below using the U-bolts, nuts and washers. Once the first nuts are tight against the plate thread a second nut onto the U-bolt. Tighten the two nuts against each other. This will help to keep the nuts from coming loose.

