

# Riding Lawn Tractors

100 SERIES | S240 SPORT | 300 SERIES | 500 SERIES



The only thing not premium about the S240 Sport is the price. [Page 8.](#)

A close-up photograph of the front of a John Deere lawn tractor. The image shows the green hood with a yellow stripe, the black steering wheel, and the John Deere logo on the front panel. The background is a blurred outdoor setting with trees and foliage.

## Quite simply, some of the finest lawn tractors made today.

We build John Deere Lawn Tractors one way. The right way. That's just how we run. You can see the results for yourself on page 4 and 6 with our X500 Select Series™ and X300 Select Series. Be sure to check out the new gas EFI, V-twin X590 model with Constant-Speed Governor technology. It's going to speed mowing all across the country.

On page 8 learn about the new S240 Sport. With its premium, 42-in. Edge™ Cutting System and large ventilated seat, you can maintain your yard at the highest levels in comfort—all for a surprisingly low price.

Then there are the 100 Series Lawn Tractors on page 10. All in all, you'll find value and a lawn tractor that's built right from the start.

No matter where you look, page after page, you'll see dedication to a premium cut, one of the best in the industry. Talk to your local John Deere Dealer. Or visit [JohnDeere.com/LawnTractors](http://JohnDeere.com/LawnTractors) or [JohnDeere.CA/LawnTractors](http://JohnDeere.CA/LawnTractors) today.

## Table of contents

X500 Series Lawn Tractors.....	4
X300 Series Lawn Tractors.....	6
S240 Sport Lawn Tractor .....	8
D100 Series Lawn Tractors.....	10
Specifications.....	12
Attachments.....	15



**Four-Wheel Steer.** All four wheels turn in unison around obstacles for extra tight turns. (Available on the X300 and X500 Series.)




**Twin Touch System.** Twin Touch™ automatic transmission lets you easily change from forward to reverse with two-pedal foot control for effortless speed and direction changes. (Available on the X300 and X500 Series.)



**Cutting Height Adjuster.** Cutting height can be adjusted in 1/4 in. increments for a precise, even cut. (Shown here on the D100 Series.)

**A heavy-duty robotically welded frame.** The bedrock of these machines. So solid, it can handle an amazing variety of heavy-duty attachments.

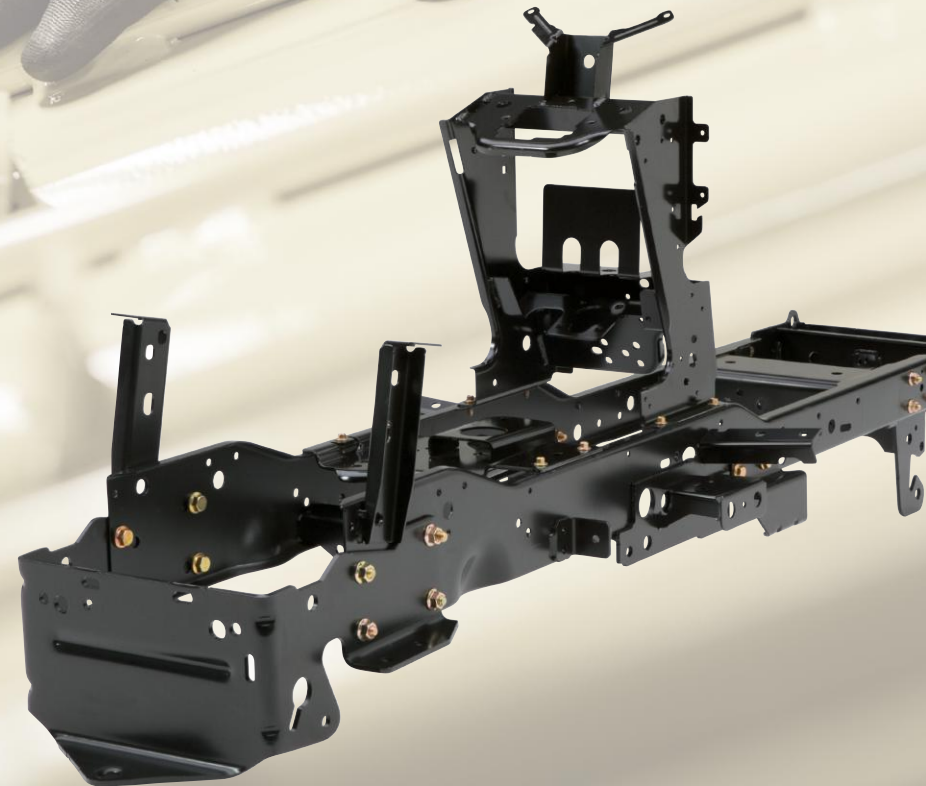

# Select Series X500

All Yours.

The NEW X590 with Constant-Speed Governor technology. In high grass, when the load increases, the engine speed on this new model remains constant, cutting mowing time and grass down to size. This may well be a first for lawn tractors everywhere. Watch the video at [JohnDeere.com/X590](http://JohnDeere.com/X590) or [JohnDeere.CA/X590](http://JohnDeere.CA/X590)



#### Hydraulic Power Steering

Hydraulic power steering makes 4-wheel steering even easier and provides excellent maneuverability and an uncut trim radius of only 13 inches (with 54-inch deck).

## The quality cut is just the beginning.

Mow with precision. Negotiate an incline. Till a garden.

X500s mow where you need to go, and do heavy-duty work, too. Their wide stance enhances stability on hillsides. Traction can be increased simply by pressing the foot operated traction control. Heavy-duty frames work with ground-engaging equipment like tillers. And features like the on-board deck leveling gauge assure a quality cut every time.

Multi-Terrain. Multi-talented: The X500 Series.

**BUMPER-TO-BUMPER**  
**4-YEAR / 500-HOUR**  
**WARRANTY**

### V-Twin Engines

All X500 Series Tractors feature V-twin engines that provide plenty of power and torque for excellent performance in any operating condition.



### Deluxe, 21-inch highback seat

Deluxe, 21-inch highback seat with spring suspension provides a smooth, comfortable ride on uneven terrain (X534 and X590.)



### Exact Adjust Deck Leveling System

This exclusive feature allows you to conveniently level the deck from just below the seat, thus eliminating the need to reach below the fender deck.



### Traction Assist

A traction assist control locks the rear transaxle, so both rear wheels work together with maximum power. It's an exceptionally effective method to negotiate muddy ground, or to climb a hill.



### The Edge™ Xtra Cutting System

Solid, stamped-steel decks are designed with superior airflow for unmatched quality and uniform discharge even in difficult mowing conditions.



### Rotary Tiller

Create a great start for your flower bed or garden.

Select Series  
X300



Get around. Everything.

## The grass is always greener around here.

Enjoy effortless steering and speed control. The X300 Series deliver all this (and more) with available four-wheel steering, and easy-to-operate Twin Touch™ foot pedals. A combination you won't find anywhere else in the industry.

Take the X310 and X360. Along with a 15-inch open-back seat, both feature power steering for precision turns and are equipped with power-lift for handling heavy attachments with ease. The real power comes from the 18.5-hp\* (13.8 kW) and 22-hp\* (16.4 kW), iTorque™ Power Systems. The responsiveness, from the Twin Touch™ foot pedals for pinpoint control forward or reverse.

So if you are looking for an easier way to get around everything in your yard, look no further.

**BUMPER-TO-BUMPER**  
4-YEAR / 300-HOUR  
**WARRANTY\*\***

### Four-Wheel Steer

All four wheels turn in unison around obstacles for extra tight turns.



### Twin Touch System

Twin Touch™ automatic transmission lets you easily change from forward to reverse with two-pedal foot control for effortless speed and direction changes.



### Exact Adjust Deck Leveling System

This exclusive feature allows you to conveniently level the deck from just below the seat, thus eliminating the need to reach below the fender deck.



### Rear Collection

For the cleanest looking lawns, choose either a bagger attachment or the custom-engineered X300R dedicated rear-bagging tractor. Its TurboStar™ Mower System is tailor-made for wet, tall grass or leaves.



### iTorque™ Power Systems.

The Select Series is powered by iTorque™ Power Systems, a combination of engine features and an exclusive hood design that provides superior lugging ability, even cooling, and durability.



# S240 SPORT

## Let the games begin.

Every epic touch football game, baseball catch, Frisbee toss deserves no less. With two-pedal forward/reverse foot controls, a precision, premium quality 42-in. Edge™ Cutting System and a cast-iron front axle for durability, the cut of your lawn will be the envy of the neighborhood. All for a surprisingly low price.

From baggers that clean up clippings to sweepers that clear yard debris to a cart that can carry around mulch and seed, S240 attachments help you get things done.

This backyard is sports turf.







**BUMPER-TO-BUMPER**  
**3-YEAR / 200-HOUR**  
**WARRANTY**



Comfortable high-back seat with open lower back to capture breezes keeps you cool.



Large, turf-friendly tires for a smooth ride and easy turns.



Powerful, smooth running 18.5-hp V-twin engine. The kind you find in our Select Series models.

Series  
**100** Feels Right. Built Right.



\*Built with foreign and domestic parts.

## Just right for your yard.

From the beginning, we make sure your 100 Series Tractor is made right. Start with the stamped deck design. It completely lifts grass for a precise, even cut. Choosing your optimal mowing height is also easy with our ¼-inch height of cut adjustment settings. You can even switch between mulching, bagging and side-discharging with our 3-in-1 Edge™ Cutting System.

Then there's legendary John Deere durability. You'll get a solid, one-piece, 12-gauge frame that's robotically welded to provide maximum strength. The durable features don't stop there: heavy-duty crankshafts, a cast-iron front axle, and a high quality engine are proof 100 Series tractors are tough and made right from the start. That's how we run. And nothing runs like a Deere.

**BUMPER-TO-BUMPER**  
**2-YEAR / 120-HOUR**  
**WARRANTY™**



**Electric PTO**, available on some models, provides instant engagement of mower blades. Ignition switch and single lever throttle/choke are on the dash within easy reach.



**Heat-resistant, comfortable seat** provides 5.5 inches of seat travel, giving plenty of room for every sized operator. Move up the line and you'll discover features like a deluxe high-back seat and lumbar adjustment.



**Deluxe double bar front bumper** comes standard on the D130, D155, D160 and D170.




**Front axle** is constructed of solid cast iron for extra durability.



**The mower decks** are stamped out of high grade steel with a rounded design to leave no corner or edge for grass to get stuck in. This helps the cut grass to travel easily through the deck and supports an even dispersal for a quality cut.



D105 Lawn Tractor features an **Automatic Transmission**. Just like your car, you simply set your direction with the fender-mounted hand control and press your pedal to select your speed.

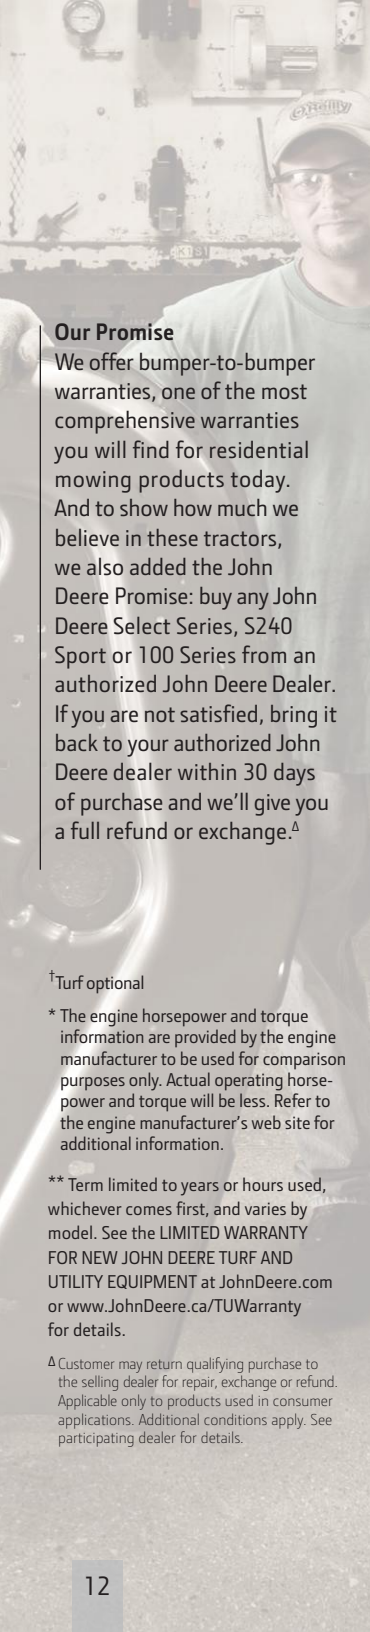

### Our Promise

We offer bumper-to-bumper warranties, one of the most comprehensive warranties you will find for residential mowing products today. And to show how much we believe in these tractors, we also added the John Deere Promise: buy any John Deere Select Series, S240 Sport or 100 Series from an authorized John Deere Dealer. If you are not satisfied, bring it back to your authorized John Deere dealer within 30 days of purchase and we'll give you a full refund or exchange.<sup>Δ</sup>

<sup>†</sup>Turf optional

\* The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's web site for additional information.

\*\* Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or www.JohnDeere.ca/TUWarranty for details.

<sup>Δ</sup> Customer may return qualifying purchase to the selling dealer for repair, exchange or refund. Applicable only to products used in consumer applications. Additional conditions apply. See participating dealer for details.

## Specifications

# X500 Series

	X500 / X530	X534 / X590
<b>Power Systems</b>		
John Deere iTorque™	John Deere iTorque™	John Deere iTorque™
Engine Power*	24 hp (17.9 kW)	25.5 hp (19 kW)
Displacement	44.3 cu in. (726 cc)	44.3 cu in. (726 cc)
Cooling	Air	Air
Cylinders	V-twin	V-twin
Lubrication System	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter
<b>Fuel System</b>		
Capacity	4.4 U.S. gal. (16.7 L)	4.4 U.S. gal. (16.7 L)
Fuel Type	Gasoline	Gasoline
<b>Ignition</b>		
Electronic	Electronic	Electronic
Electrical System	12 volts, 15 amp, regulated	12 volts, 15 amp, regulated
<b>Transmission</b>		
Hydrostatic	Hydrostatic	Hydrostatic
Forward Speed	7.2 mph (11.6 km/h)	7.2 mph (11.6 km/h)
Reverse Speed	5.2 mph (8.4 km/h)	5.2 mph (8.4 km/h)
<b>Brakes</b>		
	Internal wet disc	Internal wet disc
<b>Steering</b>		
	Low effort, 2-wheel steer / Power, 2-wheel steer	Power, 4-wheel steer / Power, 2-wheel steer
Tilt Steering Wheel	No	Yes
Front Axle	Cast iron	Cast iron
<b>Turning Radius</b>		
	22 in. (559 mm)	27 in. (686 mm) / 22 in. (559 mm)
<b>Uncut Circle Radius</b>		
	27 in. (686 mm) w/ 48-in. mower / 24 in. (610 mm) w/ 54-in. mower	14 in. (356 mm) w/ 48 in. mower, 13 in. (330 mm) w/ 54 in. mower / 24 in. (610 mm) w/ 54 in. mower
<b>Seat</b>		
	15-in. (38 cm) open back with grasp	21-in. (53 cm) high back
<b>Tires</b>		
Type	Turf/Heavy-Duty All-purpose (rear only)	Turf/Heavy-Duty All-purpose (rear only) <sup>†</sup>
Front	16x6.5-8	16x6.5-8
Rear	24x12-12	24x9.5-12 / 24x12-12
<b>Lift System</b>		
	Foot pedal w/spring assist / Power	Power
<b>PTO</b>		
	Electric clutch	Electric clutch
<b>Dimensions</b>		
Height (Seat Height)	45 in. (1143 mm)	52 in. (1321 mm)
Length, Overall	75 in. (1905 mm)	75 in. (1905 mm) / 79 in. (2007 mm)
Min. Storage Width (Deflector Up)	52 in. (1321 mm) w/ 48-in. mower / 57.5 in. (1460 mm) w/ 54-in. mower	52 in. (1321 mm) w/ 48-in. mower; 57.5 in. (1460 mm) w/ 54-in. mower
Wheelbase	51.2 in. (1300 mm)	51.2 in. (1300 mm)
Weight, Approx.	760 lb (345 kg) w/ 48-in. mower / 801 lb (364 kg) w/ 54-in. mower	861 lb (391 kg) w/ 54-in. mower / 820 lb (372 kg) w/ 54-in. mower
<b>Mower Options</b>		
Cutting Width/Blades	48 in. (1219 mm) 3 blades or 54 in. (1372 mm) 3 blades	48 in. (1219 mm) 3 blades or 54 in. (1372 mm) 3 blades
<b>Bumper-to-bumper Warranty**</b>		
	4 years / 500 hours	4 years / 500 hours

# X300 Series

	X300
<b>John Deere iTorque™</b>	
18.5 hp (13.8 kW)	18.5 hp (13.8 kW)
36.8 cu in. (603 cc)	36.8 cu in. (603 cc)
Air	Air
V-twin	V-twin
Full pressure with replaceable oil filter	Full pressure with replaceable oil filter
<b>Fuel System</b>	
Capacity	3.3 U.S. gal. (12.5 L)
Fuel Type	Gasoline
<b>Ignition</b>	
Electronic	Electronic
Electrical System	12 volts, 15 amp, regulated
<b>Transmission</b>	
Hydrostatic	Hydrostatic
Forward Speed	5.5 mph (8.9 km/h)
Reverse Speed	4.0 mph (6.4 km/h)
<b>Brakes</b>	
	Internal wet disc
<b>Steering</b>	
	Low effort, 2-wheel steer
Tilt Steering Wheel	No
Front Axle	Cast iron
<b>Turning Radius</b>	
	16 in. (406 mm)
<b>Uncut Circle Radius</b>	
	28 in. (711 mm) w/ 38-in. mower; 28 in. (711 mm) w/ 42-in. mower; 27 in. (686 mm) w/ 42-in. mulch; 21 in. (533 mm) w/ 48-in. mower
<b>Seat</b>	
	15-in. (38 cm) open back with grasp
<b>Tires</b>	
Type	Turf
Front	15x6-6
Rear	20x10-8
<b>Lift System</b>	
	Foot pedal w/38-in. and 42-in. mowers, Spring assisted foot pedal w/42-in. mulch and 48-in. mower
<b>PTO</b>	
	Electric clutch
<b>Dimensions</b>	
Height (Seat Height)	43 in. (1092 mm)
Length, Overall	72 in. (1829 mm)
Min. Storage Width (Deflector Up)	44.8 in. (1138 mm) w/ 38- and 42-in. mowers; 52 in. (1321 mm) w/ 48-in. mower
Wheelbase	49.4 in. (1255 mm)
Weight, Approx.	556 lb (252 kg) w/ 42-in. mower; 616 lb (279 kg) w/ 48-in. mower
<b>Mower Options</b>	
Cutting Width/Blades	38 in. (965 mm) 2 blades; 42 in. (1067 mm) side 2 blades; 42 in. (1067 mm) mulch 2 blades; 48 in. (1219 mm) 3 blades
<b>Bumper-to-bumper Warranty**</b>	
	4 years / 300 hours

# S240 SPORT

X304 (4WS) / X310	X320	X324 (4WS) / X360	X300R	S240 SPORT
John Deere iTorque™	John Deere iTorque™	John Deere iTorque™	John Deere iTorque™	John Deere iTorque™
18.5 hp (13.8 kW)	22 hp (16.4 kW)	22 hp (16.4 kW)	18.5 hp (13.8 kW)	18.5 hp (13.8 kW)
36.8 cu in. (603 cc)	44.3 cu in. (726 cc)	44.3 cu in. (726 cc)	36.8 cu in. (603 cc)	36.8 cu in. (603 cc)
Air	Air	Air	Air	Air
V-twin	V-twin	V-twin	V-twin	V-twin
Full pressure with replaceable oil filter	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter
3.3 U.S. gal. (12.5 L)	3.3 U.S. gal. (12.5 L)	3.3 U.S. gal. (12.5 L)	2.1 U.S. gal. (7.9 L)	2.4 U.S. gal. (9.1 L)
Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Electronic	Electronic	Electronic	Electronic	Electronic
12 volts, 15 amp, regulated	12 volts, 15 amp, regulated	12 volts, 15 amp, regulated	12 volts, 15 amp, regulated	12 volts, 15 amp, regulated
Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
5.5 mph (8.9 km/h) / 5.8 mph (9.3 km/h)	6.2 mph (10 km/h)	5.9 mph (9.5 km/h) / 6.2 mph (10.0 km/h)	5.3 mph (8.5 km/h)	5.5 mph (8.9 km/h)
4.0 mph (6.4 km/h) / 3.3 mph (5.3 km/h)	3.5 mph (5.6 km/h)	3.5 mph (5.6 km/h)	4.0 mph (6.4 km/h)	3.2 mph (5.1 km/h)
Internal wet disc	Internal wet disc	Internal wet disc	Internal wet disc	Internal wet disc
Low effort, 4-wheel steer/ Power, 2-wheel steer	Low effort, 2-wheel steer	Low effort, 4-wheel steer/ Power-Tilt, 2-wheel steer	Low effort, 2-wheel steer	Low effort, 2-wheel steer
No	No	No / Yes	No	No
Cast iron	Cast iron	Cast iron	Cast iron	Cast iron
15 in. (381 mm) / 22 in. (559 mm)	16 in. (406 mm)	15 in. (381 mm) / 22 in. (559 mm)	19 in. (483 mm)	18 in. (450 mm)
16 in. (406 mm) w/ 42-in. mower/ 32 in. (813 mm) w/ 42-in. mower	21 in. (533 mm) w/ 48-in. mower; 18 in. (457 mm) w/ 54-in. mower	9 in. (229 mm) w/ 48-in. mower / 24 in. (610 mm) w/ 48-in. mower	29 in. (740 mm)	25 in. (635 mm) w/ 42-in. mower
15-in. (381 mm), open back with grasp	15-in. (381 mm), open back with grasp	15-in. (381 mm), open back with grasp	15-in. (381 mm), open back with grasp	15-in. (381 mm), open back with grasp
Turf	Turf	Turf	Turf	Turf
15x6-6	15x6.5-8	15x6-6/ 15x6.5-8 (X360 only)	15x6-6	15x6-6
20x10-10 / 20x10-8	22x11-10	20x10-10 / 22x11-10	20x10-8	20x10-8
Foot pedal / Power	Spring-assisted foot pedal	Spring-assisted foot pedal / Power	Spring-assisted foot pedal	Hand lever
Electric clutch	Electric clutch	Electric clutch	Electric clutch	Electric clutch
43 in. (1092 mm)	43 in. (1092 mm)	43 in. (1092 mm)	43 in. (1092 mm)	45.1 in. (1147 mm)
72 in. (1829 mm)	72 in. (1829 mm)	72 in. (1829 mm)	99 in. (2514 mm)	75.05 in. (1910 mm)
44.8 in. (1138 mm) w/ 42-in. mower	52 in. (1321 mm) w/ 48-in. mower; 59.7 in. (1516 mm) w/ 54-in. mower	52 in. (1321 mm) w/ 48-in. mower	44 in. (1118 mm) w/ 42-in. mower	44.8 in. (1138 mm)
49.4 in. (1255 mm)	49.4 in. (1255 mm)	49.4 in. (1255 mm)	49.4 in. (1255 mm)	48.9 in. (1227 mm)
611 lb (277 kg) w/ 42-in. mower/ 576 lb (261 kg) w/ 42-in. mower	659 lb (299 kg) w/ 48-in. mower/ 679 lb (308 kg) w/ 54-in. mower	714 lb (324 kg) w/ 48-in. mower / 681 lb (309 kg) w/ 48-in. mower	693 lb (314 kg) w/ 42-in. mower	458 lb (208 kg) w/ 42-in. mower
42 in. (1067 mm) 2 blades	48 in. (1219 mm) 3 blades; 54 in. (1372 mm) 3 blades	48 in. (1219 mm) 3 blades	42 in. (1067 mm) two-blade TurboStar, rear discharge, rear collect	42 in. (1067 mm) 2 blades
4 years / 300 hours	4 years / 300 hours	4 years / 300 hours	4 years / 300 hours	3 years / 200 hours

# Specifications D100 Series

	D105	D110	D125 / D130	D140	D155	D160	D170
<b>Engine</b>							
Horsepower*	17.5 hp (13.0 kW)	19.0 hp (14.2 kW)	20 hp (14.9 kW)/ 22 hp (16.4 kW)	22 hp (16.4 kW)	24 hp (17.9 kW)	25 hp (18.6 kW)	25 hp (18.6 kW)
Cylinders	One	One	V-twin	V-twin	V-twin ELS	V-twin ELS	V-twin ELS
Displacement	30.5 cu in. (500 cc)	33 cu in. (540 cc)	40 cu in. (656 cc)/ 44 cu in. (724 cc)	44 cu in. (724 cc)	44 cu in. (724 cc)	44 cu in. (724 cc)	44 cu in. (724 cc)
Oil Filter	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Air Filter	Cartridge	Cartridge	Cartridge	Cartridge	Cartridge with prefilter	Cartridge with prefilter	Cartridge with prefilter
<b>Mower Deck</b>							
Cut Width	42 in. (107 cm)	42 in. (107 cm)	42 in. (107 cm)/ 42 in. (107 cm)	48 in. (122 cm)	48 in. (122 cm)	48 in. (122 cm)	54 in. (137 cm)
Cutting Blades	Two	Two	Two	Three	Three	Three	Three
Cut Height	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)
Mower Deck Material	Stamped steel	Stamped steel	Stamped steel	Stamped steel	Stamped steel	Stamped steel	Stamped steel
Blade Engagement/PTO	Manual	Manual	Manual	Electric	Electric	Electric	Electric
<b>Transmission</b>							
Type	CVT/Automatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Turning Radius	18 in. (45 cm)	18 in. (45 cm)	18 in. (45 cm)	18 in. (45 cm)	18 in. (45 cm)	18 in. (45 cm)	18 in. (45 cm)
<b>Electrical System</b>							
Capacity	9 amp	9 amp	9 amp	9 amp	16 amp	16 amp	16 amp
12-Volt power Outlet	Not available	Not available	Optional accessory	Optional accessory	Optional accessory	Optional accessory	Optional accessory
<b>Fuel System</b>							
Fuel Tank Capacity	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)
Type of Fuel	Gasoline	Gasoline	Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel Filter	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line
<b>Travel Speed</b>							
Forward	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)
Reverse	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)
<b>Seat</b>							
Height	11 in. (27.9 cm)	11 in. (27.9 cm)	15 in. (38.1 cm)	15 in. (38.1 cm)	15 in. (38.1 cm) w/lumbar adjustment	15 in. (38.1 cm) w/lumbar adjustment	15 in. (38.1 cm) w/lumbar adjustment
<b>Tires</b>							
Front	15x6-6	15x6-6	15x6-6	15x6-6	15x6-6	16x6.5-8	16x6.5-8
Rear	20x8.0-8	20x8.0-8	20x8.0-8/ 20x10-8	20x10-8	20x10-8	22x9.5-12	22x9.5-12
<b>Dimensions</b>							
Overall Length	68.75 in. (175 cm)	68.75 in. (175 cm)	68.75 in. (175 cm)/ 73.25 in. (186 cm)	69.5 in. (176.5 cm)	69.5 in. (176.5 cm)	76.5 in. (194 cm)	76.5 in. (194 cm)
Overall Width (deflector down)	54.9 in. (139 cm)	54.9 in. (139 cm)	54.9 in. (139 cm)	60.8 in. (154 cm)	60.8 in. (154 cm)	60.8 in. (154 cm)	68.5 in. (174 cm)
Height	42.5 in. (108 cm)	42.5 in. (108 cm)	44.5 in. (113 cm)	44.5 in. (113 cm)	44.5 in. (113 cm)	46.5 in. (118 cm)	46.5 in. (118 cm)
<b>Net Weight</b>							
	393 lb (178 kg)	421 lb (191 kg)	438 lb (199 kg)/ 456 lb (207 kg)	465 lb (211 kg)	483 lb (219 kg)	503 lb (228 kg)	523 lb (237 kg)
<b>Miscellaneous</b>							
Cruise Control	No	No	Yes	Yes	Yes	Yes	Yes
Front Bumper	Optional	Optional	Optional/ Standard	Optional	Standard	Standard	Standard
Steering Wheel	Standard design	Standard design	Standard design	Standard design	Premium design	Deluxe, 14 in.	Deluxe, 14 in.
Storage Compartment	No	Storage, no cover	Storage w/cover	Storage w/cover	Storage w/cover	Storage w/cover	Storage w/cover
<b>Bumper-to-Bumper Warranty**</b>							
	2 years / 120 hours						

\* The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's web site for additional information.

\*\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or www.JohnDeere.ca/TUWarranty for details.

Δ Customer may return qualifying purchase to the selling dealer for repair, exchange or refund. Applicable only to products used in consumer applications. Additional conditions apply. See participating dealer for details.

Upgrades are noted in green.

# Attachments

EQUIPMENT	X500 SERIES	X300 SERIES	S240 SPORT	D100 SERIES
<b>Two-Stage Snow Blowers</b>				
44-in. Blower	X <sup>a</sup>	X	X	X
47-in. Blower	X <sup>a</sup>			
<b>Blades</b>				
44-in. Front Blade		X		
46-in. Front Blade			X	X
48-in. Front Blade	X			
<b>Material Collection Systems</b>				
2-bag (6.5-bu) Rear Bagger			X	X
2-bag (6.5-bu) Power Flow Rear Bagger				X <sup>a</sup>
2-bag (7-bu) Rear Bagger		X <sup>a</sup>		
2-bag (7-bu) Power Flow Rear Bagger	X	X <sup>a</sup>		
3-bag (14-bu) Power Flow Rear Bagger	X			
MC519 (19-bu) Power Flow Cart	X	X <sup>a</sup>		
<b>Front Thatchers</b>				
	X	X		
<b>Rotary Tillers</b>				
30-in. Mechanical Drive	X <sup>a</sup>			
42-in. Hydraulic Drive	X <sup>a</sup>			
<b>Weather Enclosures and Canopy</b>				
Weather Enclosure	X	X <sup>a</sup>	X	X
Canopy	X	X <sup>a</sup>		X
<b>CargO Mount™ Attachments</b>				
Bucket Holder	X	X <sup>a</sup>	X	X
<b>Sprayers</b>				
15 U.S. Gallon Tow-Behind	X	X	X	X
25 U.S. Gallon Tow-Behind	X	X	X	X
45 U.S. Gallon Tow-Behind	X			
25 U.S. Gallon Mounted	X	X <sup>a</sup>		

EQUIPMENT	X500 SERIES	X300 SERIES	S240 SPORT	D100 SERIES
<b>Tow-Behind Equipment</b>				
40-in. Thatcherator	X	X	X	X
36-in. Lawn Roller	X	X	X	X
40-in. Spiker Aerator	X	X	X	X
40-in. Aerator/Spreader	X	X	X	X
42-in. Lawn Sweeper	X	X	X	X
44-in. Lawn Sweeper	X	X	X	X
40-in. Plug Aerator	X	X	X	X
48-in. Plug Aerator	X			
125-, 130-, or 175-lb Broadcast Spreaders	X	X	X	X
125 lb Electric Broadcast Spreader (Mounted)	X	X <sup>a</sup>		
<b>Utility Carts**</b>				
7P Utility Cart	X	X	X	X
8Y Utility Cart	X	X	X	X
10P Utility Cart	X	X	X	X
13 Utility Cart	X			
17P Utility Cart	X	X	X	X
**The loaded weight of the utility cart not to exceed the weight of the tractor and operator.				
<b>Tractor Shovel 40-in.</b>				
	X	X		

<sup>a</sup>Not all attachments fit on all models within Series.



Right behind you:  
your John Deere dealer.



Committed turf experts dig into what you need. Factory-trained service and parts professionals ensure that your equipment keeps working as hard as you do. So, let's get to work, together.



Models/items may not be exactly as shown

[JohnDeere.com](http://JohnDeere.com) | [JohnDeere.ca](http://JohnDeere.ca)



This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specification, design and price of the products described in this literature without notice. John Deere's green and yellow color scheme, the leaping deer symbol, and JOHN DEERE are trademarks of Deere & Company.

DSTA60613 (14-12)



Nothing runs like a Deere™