


Side-shift backhoe

Pelle-Rétro à déport latéral

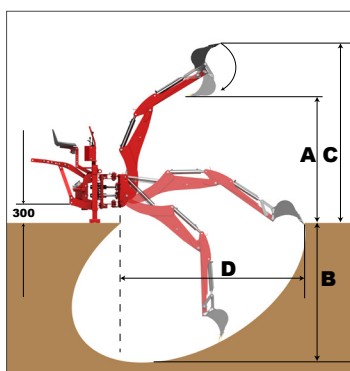


	EBM 180	EBM 230	EBM 250	EBM 270	EBM 290
Load height (A) Hauteur de chargement (A)	150 cm 4.95 ft	205 cm 6.7 ft	205 cm 6.7 ft	237 cm 7.8 ft	240 cm 7.9 ft
Digging depth (B) Profondeur d'excavation (B)	180 cm 5.9 ft	230 cm 7.6 ft	250 cm 8.2 ft	270 cm 8.9 ft	290 cm 9.5 ft
Max height (C) Hauteur maximale (C)	225 cm 7.4 ft	274 cm 9 ft	288 cm 9.5 ft	337 cm 11 ft	346 cm 11.4 ft
Digging width (D) Largeur de creusement (D)	247,5 cm 8.1 ft	296 cm 9.7 ft	301 cm 10.2 ft	353 cm 11.6 ft	360 cm 11.8 ft
Maximum width Largeur maximale	120 cm 3.9 ft	160 cm 5.3 ft	160 cm 5.3 ft	200 cm 6.6 ft	200 cm 6.6 ft
Breakout force Force d'arrachement	1500 kg 3310 lbs	2600 kg 5730 lbs	2600 kg 5730 lbs	2800 kg 6180 lbs	2800 kg 6180 lbs
Rotating angle Angle de rotation	180°	180°	180°	180°	180°
Pump capacity Capacité de la pompe	18 l/m	26 l/m	26 l/m	42 l/m	42 l/m
Pressure Pression	180 bar 2610 psi	180 bar 2610 psi	180 bar 2610 psi	180 bar 2610 psi	180 bar 2610 psi
Weight* Poids*	372 kg 820 lbs	525 kg 1157 lbs	535 kg 1179 lbs	735 kg 1620 lbs	735 kg 1620 lbs
Hitch Attelage	CAT II	CAT II	CAT II	CAT II	CAT II
Combination with bucket Combinaison avec godet	SERIE 1	SERIE 2	SERIE 2	SERIE 3	SERIE 3

*Without bucket / * Sans godet

Fixed backhoe

Pelle-Rétro à châssis fixe

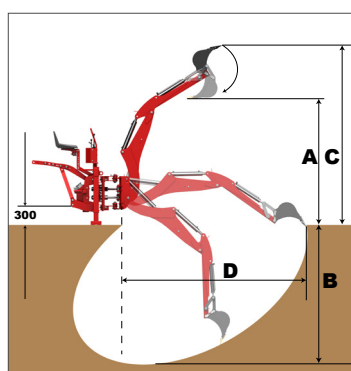

	EBF 100	EBF 120	EBF 180	EBF 230	EBF 250	EBF 270
Load height (A) Hauteur de chargement (A)	94 cm 3.1 ft	95 cm 3.1 ft	150 cm 4.9 ft	205 cm 6.8 ft	205 cm 6.8 ft	210 cm 6.9 ft
Digging depth (B) Profondeur d'excavation (B)	119 cm 3.9 ft	122 cm 4.0 ft	180 cm 5.9 ft	230 cm 7.6 ft	250 cm 8.2 ft	270 cm 8.9 ft
Max height (C) Hauteur maximale (C)	180 cm 5.9 ft	180 cm 5.9 ft	225 cm 7.4 ft	274 cm 9 ft	288 cm 9.5 ft	290 cm 9.5 ft
Digging width (D) Largeur de creusement (D)	170 cm 5.6 ft	170 cm 5.6 ft	247 cm 8.1 ft	296 cm 9.7 ft	301 cm 9.9 ft	305 cm 10 ft
Maximum width Largeur maximale	195 cm 6.4 ft	225 cm 7.4 ft	225 cm 7.4 ft	260 cm 8.6 ft	260 cm 8.6 ft	260 cm 8.6 ft
Breakout force Force d'arrachement	1100 kg 2450 lbs	1500 kg 3310 lbs	1500 kg 3310 lbs	2600 kg 5730 lbs	2600 kg 5730 lbs	2600 kg 5730 lbs
Rotating angle Angle de rotation	180°	180°	180°	180°	180°	180°
Pump capacity Capacité de la pompe	13 l/m	18 l/m	18 l/m	26 l/m	26 l/m	26 l/m
Pressure Pression	180 bar 2610 psi	180 bar 2610 psi	180 bar 2610 psi	180 bar 2610 psi	180 bar 2610 psi	180 bar 2610 psi
Weight* Poids*	266 kg 586 lbs	326 kg 719 lbs	352 kg 776 lbs	455 kg 1003 lbs	465 kg 1025 lbs	480 kg 1058 lbs
Hitch Attelage	CAT I	CAT II	CAT II	CAT II	CAT II	CAT II
Combination with bucket Combinaison avec godet	SERIE 1	SERIE 2	SERIE 2	SERIE 2	SERIE 2	SERIE 3


*Without bucket / * Sans godet

Buckets

Godets

SERIE 1								
	Width Largeur	20 cm 8 in.	25 cm 10 in.	30 cm 12 in.	40 cm 16 in.	-	60 cm 24 in.	-
	Capacity SAE Capacité SAE	12 l	15 l	20 l	30 l	30 l	39 l	-
	Weight Poids	19 kg 39 lbs	21 kg 46 lbs	23 kg 51 lbs	29 kg 64 lbs	42 kg 93 lbs	29 kg 64 lbs	45 kg 100 lbs

SERIE 2								
	Width Largeur	25 cm 10 in.	30 cm 12 in.	40 cm 16 in.	50 cm 20 in.	60 cm 24 in.	-	100 cm 39 in.
	Capacity SAE Capacité SAE	20 l	25 l	36 l	47 l	58 l	38 l	81 l
	Weight Poids	23 kg 51 lbs	30 kg 66 lbs	35 kg 77 lbs	42 kg 93 lbs	47 kg 104 lbs	42 kg 93 lbs	56 kg 124 lbs

SERIE 3								
	Width Largeur	25 cm 10 in.	30 cm 12 in.	40 cm 16 in.	50 cm 20 in.	60 cm 24 in.	70 cm 28 in.	-
	Capacity SAE Capacité SAE	34 l	34 l	49 l	64 l	79 l	95 l	49 l
	Weight Poids	36 kg 80 lbs	39 kg 86 lbs	45 kg 99 lbs	52 kg 115 lbs	59 kg 130 lbs	66 kg 145 lbs	46 kg 101 lbs