

DERETTE DIRECT
Canadian Source  Direct Price.



Derette DRT450 Canada's Tried & True Performer



-  **Honda GX690** Gas Twin, 24hp
-  **Parker** Triple Pumps
-  **North Valve** H-pattern Controls
-  **Danfoss** Hydraulic Drives
-  Aux Flow 13.7 gpm
-  Lift Capacity 860 lb
-  41" Wide
-  Max Speed 4.5 km/h
-  2,425 lb Machine Weight
-  Standard CII Attachment Plate
-  Standard 47" Bucket Included
-  2 Year Engine, 2 Year Parts Warranty

Auto Leveling Bucket



Pin height 1977mm / 77.8"
Maximizes efficiency



Hydraulic Radiator

With fan & temperature gauge
Keeps oil cool under heavy use



Triangular Track

Minimizes ground pressure
Simple mechanical tensioners



Optional Weights

40kg counterbalance weights




+1 (613) 866-5190



sales@derettedirect.com



www.derettedirect.com

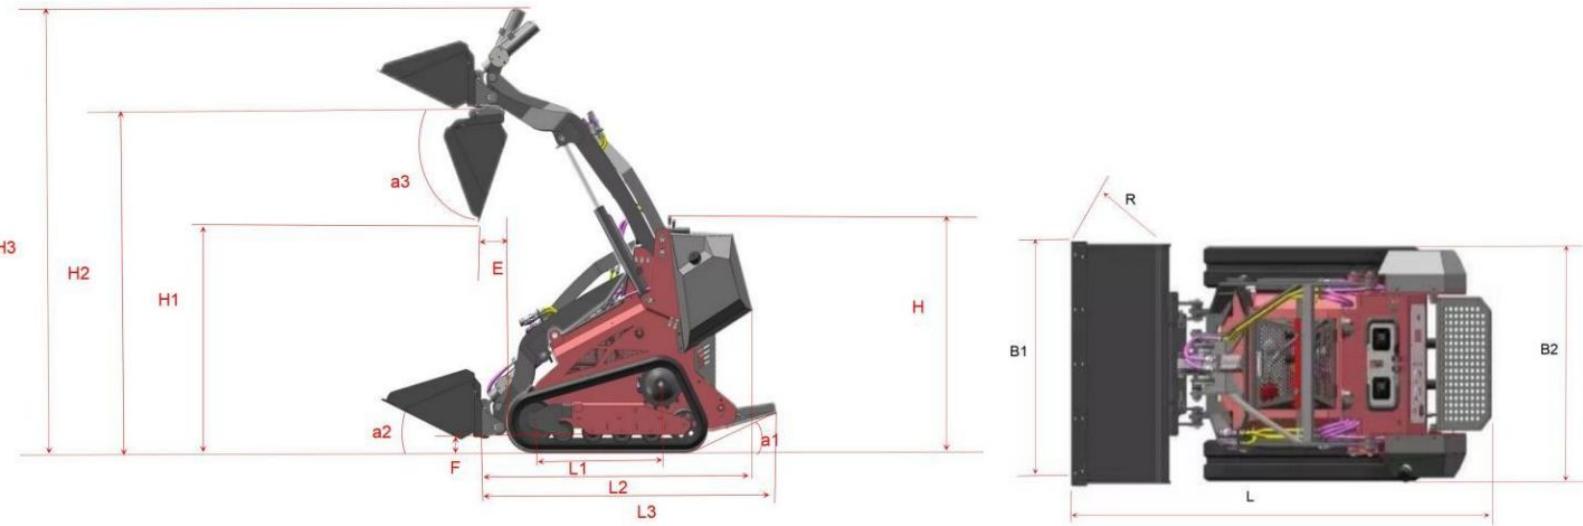

H3	Max working height	2474mm, 97.4"	F	Ground clearance	120mm, 4.7"
H2	Max pin height	1977mm, 77.8"	L1	Wheel base	890mm, 35"
H1	Max dumping height	1275mm, 50.2"	L3	Overall length without bucket	1767mm, 69.6"
E	Max dumping distance	175mm, 6.9"	B2	Total width	1030mm, 40.6"
a3	Max dumping angle	70 degrees	B1	Bucket width	1070mm, 42"
a2	Rollback of bucket on ground	25 degrees	L	Total length with bucket	2319mm, 91.3"
a1	Departure angle	23 degrees	R	Turning radius moving forward	1440mm, 56.7"
H	Total height	1300mm, 51.2"	L2	Overall length without bucket & platform folded	1633mm, 64.3"



+1 (613) 866-5190



sales@derettedirect.com



www.derettedirect.com