


# Spreader Models • Features • Specifications

## Model dimensions

	R410	R610	R810
<b>Inside box:</b>			
Length	16 ft.	16 ft.	18 ft.
Width	5 ft.	6 ft.	6 ft.
Height	3 ft.	3.5 ft.	4.5 ft.
<b>Loading height:</b>	64 in.	70 in.	84 in.
<b>Overall length:</b>	283 in.	283 in.	316 in.
<b>Overall width:</b>	114 in.	126 in.	128 in.
<b>Overall height:</b>	72 in.	74 in.	98 in.
<b>Capacity (cu ft struck):</b>	240 cu. ft.	336 cu. ft.	486 cu. ft.
<b>PTO speed:</b>	540	1000	1000
<b>Apron chain (pintle):</b>	667H	667X	667X
<b>Tires:</b>	16.00 x R20	16.00 x R20	20.5 x 25 (16-ply)
<b>Weight (lbs.):</b>	5540	6240	9120
<b>Power requirements:</b>	80 HP	120 HP	180 HP

## Standard features:

- 1/2 in. thick beaters
- Hydraulic endgate
- Variable speed hydraulic apron drive
- Steel floor with polyethylene floor liner
- Slip/over-riding clutch
- Double beater
- 3rd beater option on R810
- Swing away jack
- Removable beater panels for stockpiling

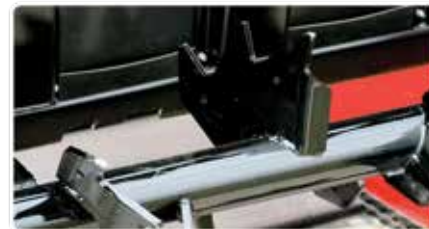

Art's Way Manufacturing Co., Inc.  
 PO Box 288 • Armstrong, IA 50514  
 (712) 864-3131 • Fax (712) 864-3154  
[sales@artsway-mfg.com](mailto:sales@artsway-mfg.com)  
[www.artsway-mfg.com](http://www.artsway-mfg.com)  
[www.artsway-ag.com](http://www.artsway-ag.com)

Art's Way Manufacturing Co., Inc. reserves the right to change design or specifications without notice. Information contained herein is general and is not intended for specific applications purpose. Photographs contained herein may be displayed with safety shields and/or guards removed to show mechanical functions only. AWMS-H315

# Art's Way

Since 1956

## H Series Pull-Type Spreaders with Horizontal Beaters



## Manure/Material Spreaders

[www.artsway-ag.com](http://www.artsway-ag.com)

meeting your needs in the field and farmyard



MORE TOP PERFORMING ART'S WAY PRODUCTS

## H Series horizontal beater pull-type spreaders

The H Series from Art's Way provides one of the most rugged, reliable and productive line of spreaders on the market.

Since the early 1950's this broad product line has continued to grow with producers' needs for greater capacity, strength and technological enhancements. Available in 16 ft. and 18 ft. box lengths, the H Series

provides solutions for all of your manure spreading needs. Beater panels are easily removable for stockpiling and other material handling.

With over 50 years of ag equipment manufacturing experience you can be sure that the tradition of quality you have come to expect from Art's Way continues.



*Art's Way's H Series spreaders have many of the same features as their big brother, the HV Series! For example, removable beater panels and variable apron speed are standard on the H Series.*



### Polyethylene floor liner

1/8 in. polyethylene floor liner for smoother operation, less wear, less freezing of material on floor and easier cleanout.



### Durable steel frame

Welded 2 in. x 4 in. heavy wall tubular steel frame ribs with 2 in. x 6 in. cross struts for superior box strength and rigidity. The front panel is constructed of 7 gauge steel. The box sides and floor are made of 10 gauge steel.



### Heavy duty chain

Art's Way spreaders feature a powerful beater drive with heavy duty #100 roller chains.



### Slop gate

Steel frame slop gate with 3/8 in. polyethylene liner and twin lift cylinders. (Slop gate positioning is determined by the material being spread.)



### Heavy duty beaters

Heavy duty dual 24 in. diameter cast iron flange bearings with 24-1/2 in. steel beater teeth.



### Adjustable flow control

Standard hydraulic apron worm gear drive with variable flow speed control.