

TRITON

TRAILERS

ALUMINUM UTILITY TRAILERS



BUILT FOR ADVENTURE.

UTILITY TRAILERS



page
3

The Triton
Difference



page
4

FIT Series



page
8

AUX Series



page
10

TILT Series



page
12

ATV Series



page
14

UT Series



page
16

CH & EHHD
Series



page
18

Accessories



Cover: Brad working
outside on a fall day in
central Wisconsin.



Register your trailer at tritontrailers.com
for a limited 5 year warranty.

THE TRITON DIFFERENCE

Trailers are not equal when it comes to reliability and construction. Just like a house, the quality and craftsmanship of the builder makes the difference. Every Triton trailer has all-aluminum construction, with fully welded frames that are fixture-built with custom aluminum extrusions. The result? A solid structure that you can trust to haul what's important to you, for years, in whatever weather conditions you love.



CONSTRUCTION

Fully welded frame and ramp

Floor crossmembers and frame are fixture-built with custom extrusions

Wiring is sealed and encased in aluminum tubing

Four cord torsion axle suspension

Aluminum, hardwood plank, and fully treated marine grade plywood deck options.

Cargo security (see models for standard tie down features)

LED trailer lights

Tongue jack offset prevents interference when opening most tailgates

FIT SERIES

NEW

As its name suggests, the FIT Series is uniquely designed to fit whatever you are hauling. With a broad range of trailer sizes and carrying capacities, a wide range of accessory kits that fit every trailer model, and the most tie down possibilities to secure cargo - FIT Series is the go-to trailer, no matter what you are hauling.



FIT1681-2
Pictured with accessories

DEPEND ON TRITON CONSTRUCTION EVERY TIME

- FULLY WELDED, ALL-ALUMINUM FRAME AND RAMP**
The Triton difference - fully welded frames and ramps are fixture-built with custom aluminum extrusions, providing added strength and solid structures for years of use.
- DURABLE 1" ALUMINUM OR HARDWOOD PLANK DECK**
All models are available with a 1" aluminum deck for robust performance. Select models have an optional 1" hardwood plank deck. Hardwood planks are stronger than pine and can be sealed, unlike pressure treated lumber.
- STRAIGHT AND BI-FOLD RAMP OPTIONS**
Easy to use when loading and unloading, the straight and bi-fold ramps also fold flat on the deck when the trailer is empty, reducing drag while towing.

THE MOST FLEXIBLE TRAILERS TO FIT YOUR HAULING NEEDS

- QUICKSLIDE™ AND 360° CARRIAGE BOLT TIE-DOWN CHANNELS**
FIT is the most flexible for securing cargo and offers the most tie down positions. Carriage bolt channels on the exterior of the frame (front, sides and rear) provide 360° of tie down possibilities, while Quickslide channels provide tie down options the full length of the trailer deck.
- WIDE RANGE OF ACCESSORY KITS**
Need side rails or side walls to get the job done? Choose from a wide range of kits that are easily assembled on any FIT trailer model, from side rails and stone guards to solid sides and fence-style walls.
- STANDARD AND OPTIONAL TIE DOWNS**
Every FIT trailer comes standard with four D-ring tie downs for the full-length Quickslide channels. Additional D-rings, flush tie downs and eyebolt tie downs are available for the Quickslide channels in the deck, and D-rings are available for the carriage bolt channels on the exterior frame.

THE DETAILS MATTER

- FLUSH LED LIGHTING**
LED lighting is integrated into the rear cross members, fenders and side rails for a clean appearance. Wiring is protected from road debris in the aluminum wireways.
- FOUR CORD RUBBER E-COATED TORSION AXLE**
Designed for a smooth ride and corrosion resistance.
- ALUMINUM FENDERS**
The icing on the cake - sleek aluminum fenders complement the signature fit and finish of the all-aluminum construction FIT trailers.

POPULAR OPTIONS

| | |
|-------------------------|----------------------|
| Spare tire carrier | Front rail kit |
| Bi-fold ramp | Side rail kit |
| Tire and wheel upgrades | Solid front kit |
| Electric brakes | Solid side kit |
| Wheel stop kit | Fence-style side kit |
| | Stone guard kit |

FIT SERIES MODELS

FIT852, FIT864, FIT1064



FIT864

Pictured with the optional Stone Guard Kit 22481.

**FIT864-P, FIT1064-P,
FIT1281-P, FIT1481-P**



FIT1481-P

Pictured with hardwood plank deck, optional 2 x 2 Side Rail Kit 21678, optional bifold ramp and optional wheel stop 22359.

FIT1072, FIT1272, FIT1472



FIT1272

Pictured with optional 11.6" Solid Side Kit 22578 and optional bifold ramp.

FIT1481-2, FIT1681-2



FIT1681-2

Pictured with standard bifold HD ramp and optional Spare Tire Carrier 22008.

FIT1281, FIT1481



FIT1281

Pictured with optional 20.6" Fence-style Side Kit 22364.

FIT1481-2-P, FIT1681-2-P



FIT1681-2-P

Pictured with hardwood plank deck, optional 11.6" Solid Side Kit 22578.

FIT SERIES ACCESSORIES



2 x 2 Wheel Stop Kit: 22359
2" x 2" rail provides a wheel stop. Top of rail stands 8.5" high from the deck.



Solid Front Kit: 22526
Provides protection against road debris. 20.6" high from the deck.



2 x 2 Side Rail Kit: 21678
Adds 2" x 2" rails to the left and right sides (requires front wheel stop kit 22359). Top of rail stands 8.5" high from the deck. Note: ramp does not lay flat on the deck with this kit.



Fence-style Side Kit: 22364
Includes solid front and two fence-style sides. Front and sides are 20.6" high from the deck.



Front Rail Kit: 22473
Aluminum rail mounts at the front of the deck to provide a wheel stop.



Solid Side Kit: 22360
Includes solid front and two solid sides. Front and sides are 20.6" high from the deck.



Stone Guard Kit: 22481
Attaches to the front rail kit to deflect road debris (requires front rail kit 22473).



Solid Side Kit: 22578
Includes solid front and two solid sides. Front and sides are 11.6" high from the deck.



FIT SERIES SPECIFICATIONS

| | FIT852 | FIT864 | FIT864-P | FIT1064 | FIT1064-P | FIT1072 | FIT1272 | FIT1281 | FIT1281-P | FIT1472 | FIT1481 | FIT1481-P | FIT1481-2 | FIT 1481-2-P | FIT1681-2 | FIT 1681-2-P |
|--------------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|-----------------------|-----------------------|
| Bed Width (in.) | 52 | 64 | 64 | 64 | 64 | 72 1/2 | 72 1/2 | 80 3/4 | 80 3/4 | 72 1/2 | 80 3/4 | 80 3/4 | 80 3/4 | 80 3/4 | 80 3/4 | 80 3/4 |
| Bed Length (in.) | 96 | 96 | 96 | 120 | 120 | 120 | 144 | 144 | 144 | 168 | 168 | 168 | 168 | 168 | 192 | 192 |
| Deck Type | Aluminum | Aluminum | Hardwood Planks | Aluminum | Hardwood Planks | Aluminum | Aluminum | Aluminum | Hardwood Planks | Aluminum | Aluminum | Hardwood Planks | Aluminum | Hardwood Planks | Aluminum | Hardwood Planks |
| Tie Downs | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 | (4) D-rings 21790 |
| Overall Width (in.) | 73 3/32 | 85 5/32 | 85 5/32 | 85 5/32 | 85 5/32 | 93 25/32 | 93 25/32 | 101 29/32 | 101 29/32 | 93 25/32 | 101 29/32 | 101 29/32 | 101 29/32 | 102 | 102 | 102 |
| Overall Length (in.) | 134 | 134 | 134 | 158 | 158 | 158 | 182 | 182 | 182 | 206 | 206 | 206 | 206 | 206 | 230 | 230 |
| Ramp Standard | Straight | Straight | Straight | Straight | Straight | Straight | Straight | Straight | Straight | Straight | Straight | Straight | Straight | Bifold HD | Bifold HD | Bifold HD |
| Ramp Option | Bifold | Bifold | Bifold | Bifold | Bifold | Bifold | Bifold | Bifold | Bifold | Bifold | Bifold | Bifold | Bifold | N/A | N/A | N/A |
| Tilt Bed | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No |
| Carrying Capacity w/o Brakes (lb.) | 1,818 | 1,772 | 1,743 | 1,723 | 1,690 | 2,472 | 2,399 | 2,261 | 2,201 | 2,311 | 2,188 | 2,206 | N/A | N/A | N/A | N/A |
| GVWR w/o Brakes (lb.) | 2,200 | 2,200 | 2,200 | 2,200 | 2,200 | 2,995 | 2,995 | 2,995 | 2,995 | 2,995 | 2,995 | 2,995 | N/A | N/A | N/A | N/A |
| Carrying Capacity with Brakes (lb.) | N/A | N/A | N/A | N/A | N/A | 2,977 | 2,909 | 2,766 | 2,706 | 2,816 | 2,693 | 2,711 | 5,875 | 5,862 | 5,785 | 5,777 |
| GVWR with Brakes (lb.) | N/A | N/A | N/A | N/A | N/A | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 7,000 | 7,000 | 7,000 | 7,000 |
| Trailer Weight (lb.) | 382 | 428 | 457 | 477 | 510 | 523 | 596 | 734 | 794 | 684 | 807 | 789 | 1,125 | 1,138 | 1,215 | 1,223 |
| No. Of Axles | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 2 |
| Hitch Height (in.) | 15 3/4 | 15 3/4 | 15 3/4 | 15 3/4 | 15 3/4 | 17 | 17 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| Deck Height (in.) | 18 | 18 | 18 | 18 | 18 | 19 1/4 | 19 1/4 | 19 1/4 | 19 1/4 | 19 1/4 | 19 1/4 | 19 1/4 | 19 1/4 | 19 1/4 | 19 1/4 | 19 1/4 |
| Standard Tires* | A | A | A | A | A | G | G | G | G | G | G | G | G | G | G | G |
| Tire Upgrade Options* | B,C,D,E,F | B,C,D,E,F | B,C,D,E,F | B,C,D,E,F | B,C,D,E,F | H,I,J | H,I,J | H,I,J | H,I,J | H,I,J | H,I,J | H,I,J | H,I,J | H,I,J | H,I,J | H,I,J |
| Tongue Jack | Option | Option | Option | Option | Option | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Coupler (in.) | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 5/16 | 2 5/16 | 2 5/16 | 2 5/16 |
| Brake Standard | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | Electric-Front | Electric-Front | Electric-Front |
| Brake Options | N/A | N/A | N/A | N/A | N/A | Electric | Electric | Electric | Electric | Electric | Electric | Electric | Electric | Electric-Front & Rear | Electric-Front & Rear | Electric-Front & Rear |

*TIRE OPTIONS

| Option | Tire | Part Number | Option | Tire | Part Number | Option | Tire | Part Number | Option | Tire | Part Number |
|--------|-----------------------------------|-------------|--------|-----------------------------------|-------------|--------|----------------------------------|-------------|--------|--------------------|-------------|
| A | ST175/80D13C Steel | 03392 | D | ST175/80R13C Steel | 14107 | G | ST205/75D14 Steel | 06672 | J | ST205/75R14C Steel | 14113 |
| B | ST175/80D13C Aluminum T08 | 09942 | E | ST175/80R13C Aluminum T08 | 14111 | H | ST205/75D14 Aluminum T08 | 06193 | | | |
| C | ST175/80D13C Aluminum Machine Lip | 09942-TML | F | ST175/80R13C Aluminum Machine Lip | 14111-TML | I | ST205/75D14 Aluminum Machine Lip | 06193-TML | | | |

AUX BEAVERTAIL SERIES

AUX Series trailers are equipment and machine haulers, from ATVs and side-by-sides to golf carts and lawn mowers. Infinite tie down positions run the full length of the extruded aluminum deck to secure cargo, and the signature rear beavertail makes unloading and loading easy, especially for low ground clearance vehicles.



AUX2282 Pictured with Accessories

- 1 FULLY WELDED FRAME AND DECK**
The Triton difference - all-aluminum, fully welded frame provides a solid structure for years of loading and unloading. Frame and decking are fixture-built with custom extrusions, providing added strength with Triton fit and finish.
- 2 SIDE OR REAR LOADING OPTIONS**
Heavy-duty long bi-fold ramp or side ramp kit options are fully welded, providing superior support when loading vehicles.
- 3 BEAVERTAIL DESIGN**
Dropped rear beavertail deck for easy loading, especially low ground clearance vehicles.
- 4 TONGUE DESIGN**
Durable, fully welded A-frame tongue adds strength to the frame for reliable towing.

- 5 UNLIMITED TIE DOWN POINTS**
Quickslide channels in the deck provide multiple tie down points. Four standard D-ring tie downs can be easily moved and positioned in the channels to secure cargo.
- 6 SEALED LED LIGHTS AND WIRING**
LED lights are sealed and wiring throughout trailer is sealed and encased in aluminum tubing, resisting corrosion caused by moisture.
- 7 TOUGH MOLDED FENDERS**
Fenders with integral molded steps provide step points to access and tie down machines or cargo.

- 8 TANDEM TORSION AXLE**
Independent suspension with four cord rubber torsion axles provides a smooth ride.
- 9 TONGUE JACK**
1500# swivel wheel tongue jack with 10" up/down travel (AUX1882, AUX2082) or 5000# swivel wheel tongue jack with 15" up/down travel (AUX2282-7K, AUX2482-7K) helps you easily move your trailer into position. (not pictured)

POPULAR ACCESSORIES

Spare tire carrier and spare tire
Aluminum wheels

AUX BEAVERTAIL SERIES MODELS & SPECIFICATIONS

AUX1882, AUX2082



AUX1882 Pictured With Accessories

- 4 D-ring tie downs included.
- Heavy-duty long bi-fold ramp or side ramp kit options.
- 1500# tongue jack.
- Electric brakes standard on one axle.
- 6,000 GVWR.



AUX2282 Pictured With Accessories

AUX2282-7K, AUX2482-7K

- 4 D-ring tie downs included.
- Heavy-duty long bi-fold ramp or side ramp kit options.
- 5000# tongue jack.
- Electric brakes standard on both axles.
- 7,000 GVWR.

| | Bed Width (in.) | Bed Length (in.) | Overall Width (in.) | Overall Length (in.) | Ramp Standard | Tilt Bed | Carrying Capacity with Brakes (lb.) | GVWR with Brakes (lb.) | Trailer Weight (lb.) | No. Of Axles | Hitch Height | Deck Height | Standard Tires* | Tire Upgrade Options* | Tongue Jack | Loading Style | Coupler (in.) | Brake Options |
|----------------------|-----------------|------------------|---------------------|----------------------|---------------|----------|-------------------------------------|------------------------|----------------------|--------------|--------------|-------------|-----------------|-----------------------|-------------|---------------|---------------|---------------|
| AUX1882-SPORT | 81.25 | 216 | 102 | 270 | NO | NO | 4662 | 6000 | 1338 | 2 | 20 | 23.75 | G | H, I, J | YES | SIDE/REAR | 2 5/16 | STD. 1-ELEC |
| AUX2082-SPORT | 81.25 | 240 | 102 | 294 | NO | NO | 4600 | 6000 | 1400 | 2 | 20 | 23.75 | G | H, I, J | YES | SIDE/REAR | 2 5/16 | STD. 1-ELEC |
| AUX2282-7K | 81.25 | 264 | 102 | 318 | NO | NO | 5498 | 7000 | 1502 | 2 | 20 | 23.75 | G | H, I, J | YES | SIDE/REAR | 2 5/16 | STD. 2-ELEC |
| AUX2482-7K | 81.25 | 288 | 102 | 342 | NO | NO | 5443 | 7000 | 1557 | 2 | 20 | 23.75 | G | H, I, J | YES | SIDE/REAR | 2 5/16 | STD. 2-ELEC |

*TIRE OPTIONS

| Option | Tire | Part Number | Option | Tire | Part Number | Option | Tire | Part Number | Option | Tire | Part Number |
|----------|--------------------|-------------|----------|-----------------------|-------------|----------|--------------------------|-------------|----------|----------------------------------|-------------|
| G | ST205/75D14 Steel | 06672 | H | ST205/75R14C Steel | 14113 | I | ST205/75R14 Aluminum T08 | 06193 | J | ST205/75R14 Aluminum Machine Lip | 06193-TML |
| W | ST205/75D15C Steel | 08056 | Y | ST205/75D15C Aluminum | 09611 | | | | | | |

AUX BEAVERTAIL SERIES ACCESSORIES



HD Long Bi-Fold Ramp & HD Ramp Arm Kit: 18679.
Rated at 3000 lb. vehicle weight, one axle at a time.



Wheel Stop Kit: 19140.
(Shown on a TILT1282)



HD Bi-Fold Ramp & HD Corner Post Kit: 18601.
Rated at 3000 lb. vehicle weight, one axle at a time.



Spare Tire Carrier Kit: 18603.
(tire not included)



Stone Guard Ramp Kit (UTVs): 19620.
Rated at 500 lb. per ramp or 2000 lb. vehicle weight, one axle at a time. Ramp channel kit required.



Diamond Plate Storage Box: 13450.
For AUX2282-7K, AUX2482-7K models only (battery not included)



Wheel Stop Kit: 17813.

For more accessories see page 22.

TILT SERIES

The hallmark of the TILT Series is soft, precise motion thanks to its automotive racing shock system. With a balance point you can feel and double wishbone frame construction, alignment of vehicles are all smooth operations. Each TILT model offers infinite tie down positions that run the full length of the extruded aluminum deck to secure cargo.



TILT1282 Pictured with Accessories

- 1 FULLY WELDED FRAME AND DECK**
The Triton difference - all-aluminum, fully welded frame provides a solid structure for years of loading and unloading. Frame and decking are fixture-built with custom extrusions, providing added strength with Triton fit and finish.
- 2 DESIGNED FOR EASY VEHICLE LOADING**
Automotive racing shock system with controlled tilting provides smooth action for easy loading and unloading.
- 3 TONGUE DESIGN**
Fully welded wishbone tongue adds strength to the frame for towing and frequent loading and unloading of vehicles.

- 4 UNLIMITED TIE DOWN POINTS**
Quickslide channels in the deck provide multiple tie down points. Four D-ring tie downs can be easily moved and positioned in the channels to secure cargo.
- 5 SEALED LED LIGHTS AND WIRING**
LED lights are sealed and wiring throughout trailer is sealed and encased in aluminum tubing, resisting corrosion caused by moisture.
- 6 TOUGH MOLDED FENDERS**
Fenders with integral molded steps provide step points to access and tie down machines or cargo.

- 7 TORSION AXLE**
Independent suspension with four cord rubber torsion axle provides a smooth ride.
- 8 TONGUE JACK**
1000# swivel wheel tongue jack with 10" up/down travel helps you easily move your trailer into position.

POPULAR ACCESSORIES

Bracket tie downs
Spare tire carrier and spare tire
Aluminum wheels
Front Rail Kit
Stone Guard Kit
Wheel Stop Kit

TILT SERIES MODELS & SPECIFICATIONS

TILT1072, TILT1282, TILT1482



TILT1282 Pictured With Accessories

- 4 D-ring tie downs included.
- Electric brakes optional.




| | Bed Width (in.) | Bed Length (in.) | Overall Width (in.) | Overall Length (in.) | Ramp Standard | Tilt Bed | Carrying Capacity w/o Brakes (lb.) | GVWR w/o Brakes (lb.) | Carrying Capacity with Brakes (lb.) | GVWR with Brakes (lb.) | Trailer Weight (lb.) | No. Of Axles | Hitch Height | Deck Height | Standard Tires* | Tire Upgrade Options* | Tongue Jack | Loading Style | Coupler (in.) |
|----------|-----------------|------------------|---------------------|----------------------|---------------|----------|------------------------------------|-----------------------|-------------------------------------|------------------------|----------------------|--------------|--------------|-------------|-----------------|-----------------------|-------------|---------------|---------------|
| TILT1072 | 72 | 120 | 93 | 177 | NO | YES | 2495 | 2995 | 3000 | 3500 | 500 | 1 | 15.5 | 18 | G | H, I, J | YES | REAR | 2 |
| TILT1282 | 80.75 | 144 | 102 | 192 | NO | YES | 2295 | 2995 | 2800 | 3500 | 700 | 1 | 14.5 | 18.5 | G | H, I, J | YES | REAR | 2 |
| TILT1482 | 80.75 | 168 | 102 | 216 | NO | YES | 2168 | 2995 | 2673 | 3500 | 827 | 1 | 14.5 | 18.5 | G | H, I, J | YES | REAR | 2 |

*TIRE OPTIONS

| Option | Tire | Part Number | Option | Tire | Part Number | Option | Tire | Part Number | Option | Tire | Part Number |
|--------|-------------------|-------------|--------|--------------------|-------------|--------|--------------------------|-------------|--------|----------------------------------|-------------|
| G | ST205/75D14 Steel | 06672 | H | ST205/75R14C Steel | 14113 | I | ST205/75R14 Aluminum T08 | 06193 | J | ST205/75R14 Aluminum Machine Lip | 06193-TML |

TILT SERIES ACCESSORIES


| | TILT 1072 | TILT 1282 | TILT 1482 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|
|  <p>TALL SIDE RAIL KIT (order with tall front rail kit, corner post & 11242 3/8" tie downs*)</p> | 12847 | 17770 | 17780 |
|  <p>*11242 Number of 3/8" tie down kits needed</p> | | | |
| 12847 TALL SIDE RAIL KIT | 0 | | |
| 17770 TALL SIDE RAIL KIT | | 1 | |
| 17780 TALL SIDE RAIL KIT | | | 2 |
|  <p>TALL FRONT RAIL KIT</p> | 16789 | 19486 | 19486 |

| | TILT 1072 | TILT 1282 | TILT 1482 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|
|  <p>TALL STONE GUARD KIT (order with tall front rail kit)</p> | 16788 | 17772 | 17772 |
|  <p>CORNER POST KIT</p> | N/A* | 18607 | 18607 |
|  <p>WHEEL STOP KIT (TILT)</p> | 19485 | 19140 | 19140 |

For more accessories see page 22.

ATV SERIES

Designed specifically for off-road vehicles, the ATV Series makes hauling ATVs and UTVs easy with side- and rear-loading options and full-length adjustable tie down positions. Marine grade plywood decks stand up to the elements. Choose ATV-TR for easy-to-maneuver twin ramps.

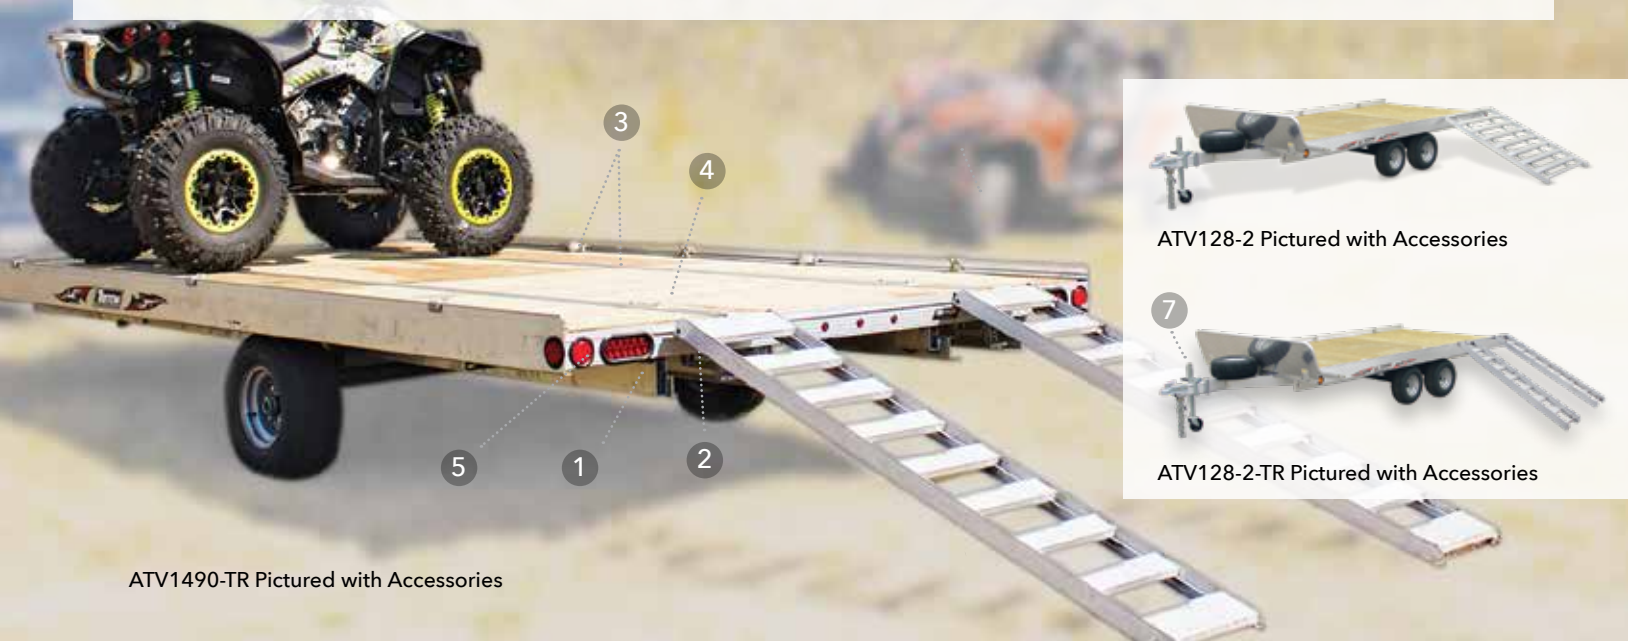

ATV1490-TR Pictured with Accessories

- 1 FULLY WELDED FRAME**
The Triton difference - all-aluminum, fully welded box frame provides a solid structure for years of loading and unloading. Frame is fixture-built with custom extrusions, providing added strength with Triton fit and finish.
- 2 SIDE OR REAR LOADING OPTIONS**
Full-size ramp (ATV models), twin ramps (ATV-TR models) and 13" wide twin ramps (ATV-90-TR) are fully welded, providing superior support when loading and unloading vehicles. Ramps can be positioned at the side or rear for loading. Ramps are easily stored in an under-deck storage system.
- 3 MULTIPLE TIE DOWN POINTS**
Integrated channels in the side rails provide multiple tie down points. Four tie downs can be easily moved and positioned in the channels to secure cargo.
- 4 DURABLE DECK**
Fully treated 1/2"(ATV & ATV-TR) or 5/8" (ATV-90-TR) marine grade plywood deck stands up to the elements for years of outdoor use.
- 5 SEALED LED LIGHTS AND WIRING**
LED lights are sealed and wiring throughout trailer is sealed and encased in aluminum tubing, resisting corrosion caused by moisture.
- 6 TORSION AXLE(S)**
Independent suspension with four cord rubber torsion axle provides a smooth ride.
- 7 TONGUE JACK**
1000# (ATV & ATV-TR) and 1500# (ATV-90-TR) swivel wheel tongue jacks with 10" up/down travel help easily move your trailer into position (Tongue jack is not standard for ATV88, ATV88-TR.)

ATV SERIES ACCESSORIES

| | ATV | ATV-TR | ATV-90-TR | | ATV | ATV-TR | ATV-90-TR |
|-------------------------------------------------------------------------------------|-------|--------|-----------|--------------------------------------------------------------------------------------|-------|--------|-----------|
|  | 08544 | 08544 | 19454 |  | 08535 | 08535 | 08535 |
|  | 11055 | 11055 | 19455 |  | N/A | N/A | 19465 |
|  | 12910 | N/A | N/A |  | N/A | N/A | 19261 |

ATV SERIES MODELS & SPECIFICATIONS

ATV88, ATV88-TR



Pictured With Accessories

- Two place capacity for side loading.
- Single ramp or twin ramps (TR) for side or rear loading.
- 4 tie downs included.

ATV1490-TR, ATV1490-2-TR



- Capacity examples: Side load up to three ATVs; side load one ATV and rear load one 2-place UTV; or rear load one 6-place UTV. Check measurements of vehicles for proper fitment.
- 6 tie downs included.
- Torsion axle on ATV1490-TR
- Tandem torsion axles on ATV1490-2-TR.
- Surge and electric brakes optional on one or both axle(s).

ATV128, ATV128-2 ATV128-TR, ATV128-2-TR



Pictured With Accessories

- Three place capacity for side loading.
- Single ramp or twin ramps (TR) for side or rear loading.
- 6 tie downs included.
- Torsion axle on ATV128 & ATV128-TR
- Tandem torsion axles on ATV128-2 & ATV128-2-TR.
- Surge or electric brakes optional.

ATV1890-TR



- Capacity examples: Side load up to four ATVs; side load up to two ATVs and rear load one 2-place UTV; rear load two 2-place UTVs; or rear load one 6-place UTV. Check measurements of vehicles for proper fitment.
- 8 tie downs included.
- Tandem torsion axles.
- Surge and electric brakes optional on one or both axle(s).

ATV168



- Four place capacity for side loading.
- Single ramp or twin ramps (TR) for side or rear loading.
- 8 tie downs included.
- Surge or electric brakes optional.

| | Bed Width (in.) | Bed Length (in.) | Overall Width (in.) | Overall Length (in.) | Tilt Bed | Carrying Capacity w/o Brakes (lb.) | GVWR w/o Brakes (lb.) | Carrying Capacity with Brakes (lb.) | GVWR with Brakes (lb.) | Trailer Weight (lb.) | No. Of Axles | Hitch Height | Deck Height | Standard Tires* | Tire Upgrade Options* | Tongue Jack | Loading Style | Coupler (in.) |
|--------------|-----------------|------------------|---------------------|----------------------|----------|------------------------------------|-----------------------|-------------------------------------|------------------------|----------------------|--------------|--------------|-------------|-----------------|-----------------------|-------------|---------------|---------------|
| ATV88 | 79 | 104 | 79.75 | 150 | NO | 1520 | 1880 | N/A | N/A | 360 | 1 | 19 | 22 | K | L, M, N, O | NO | SIDE/REAR | 2 |
| ATV128 | 79 | 152 | 79.75 | 202 | NO | 2475 | 2995 | N/A | N/A | 520 | 1 | 22 | 25.5 | N | O, P, Q | YES | SIDE/REAR | 2 |
| ATV128 | 79 | 152 | 79.75 | 202 | NO | N/A | N/A | 2980 | 3500 | 520 | 1 | 22 | 25.5 | N/A | G, I, J | YES | SIDE/REAR | 2 |
| ATV128-2 | 79 | 152 | 79.75 | 202 | NO | 2315 | 2995 | 3720 | 4400 | 680 | 2 | 22 | 25.5 | L | M, N, O | YES | SIDE/REAR | 2 |
| ATV168 | 79 | 200 | 79.75 | 250 | NO | 2215 | 2995 | 3620 | 4400 | 780 | 2 | 22 | 25.5 | L | M, N, O | YES | SIDE/REAR | 2 |
| ATV88-TR | 79 | 104 | 79.75 | 150 | NO | 1470 | 1880 | N/A | N/A | 410 | 1 | 19 | 22 | K | Q, M, N, O | NO | SIDE/REAR | 2 |
| ATV128-TR | 79 | 152 | 79.75 | 202 | NO | 2425 | 2995 | N/A | N/A | 570 | 1 | 22 | 25.5 | N | O, P, Q | YES | SIDE/REAR | 2 |
| ATV128-TR | 79 | 152 | 79.75 | 202 | NO | N/A | N/A | 2930 | 3500 | 570 | 1 | 22 | 25.5 | N/A | G, I, J | YES | SIDE/REAR | 2 |
| ATV128-2-TR | 79 | 152 | 79.75 | 202 | NO | 2265 | 2995 | 3670 | 4400 | 730 | 2 | 22 | 25.5 | L | M, N, O | YES | SIDE/REAR | 2 |
| ATV168-TR | 79 | 200 | 79.75 | 250 | NO | 2165 | 2995 | 3570 | 4400 | 830 | 2 | 22 | 25.5 | L | M, N, O | YES | SIDE/REAR | 2 |
| ATV1490-TR | 90 | 168 | 90.5 | 219 | NO | 2281 | 2995 | 2586 | 3200 | 714 | 1 | 23 | 27 | N | O, P, Q | YES | SIDE/REAR | 2 |
| ATV1490-2-TR | 90 | 168 | 90.5 | 219 | NO | 2154 | 2995 | 4159 | 5000 | 841 | 2 | 23 | 27 | N | O, A, B, P, Q | YES | SIDE/REAR | 2 |
| ATV1890-TR | 90 | 216 | 90.5 | 267 | NO | 2001 | 2995 | 4006 | 5000 | 994 | 2 | 23.5 | 27.5 | N | O, A, B, P, Q | YES | SIDE/REAR | 2 |

*TIRE OPTIONS

| Option | Tire | Part Number | Option | Tire | Part Number | Option | Tire | Part Number | Option | Tire | Part Number |
|--------|---------------------------|-------------|--------|----------------------------------|-------------|--------|-------------------|-------------|--------|-----------------------------|-------------|
| A | ST175/80D13C Steel | 03392 | I | ST205/75R14 Aluminum Machine Lip | 06193-TML | L | 20.5 X 10 C Steel | 03165 | O | ST145/R12E Aluminum | 10384 |
| B | ST175/80D13C Aluminum T08 | 09942 | J | ST205/75D15 Aluminum T08 | 06193 | M | 20.5 X 10 E Steel | 07355 | P | ST175/80R-13D Painted White | 07107 |
| G | ST205/75D14 Steel | 06672 | K | 18.5 X 8C Steel | 02435 | N | ST145/R12E Steel | 08875 | Q | 175/80R13D Aluminum T08 | 09475 |

UT SERIES

The durable UT Series is ready to haul large equipment, vehicles and commercial goods. Combination extruded aluminum and marine grade plywood decks stand up to heavy-duty hauling.



UT12 Pictured with Accessories

1 FULLY WELDED FRAME

The Triton difference - all-aluminum, fully welded box frame provides a solid structure for years of loading and unloading. Frame is fixture-built with custom extrusions, providing added strength with Triton fit and finish.

2 STAKE POCKETS

Ten stake pockets welded to the frame provide tie down points or are convenient to build your own side kit to contain loads.

3 UT12, UT16 COMBINATION DECK

Plywood and extruded aluminum deck provides durability and an integrated tie down system to secure loads. Fully treated 5/8" marine grade plywood stands up to the elements for years of outdoor use. (Models UT12, UT12-2 and UT16)

4 UT16-7 HEAVY DUTY DECK

A heavy duty 1" plywood deck with deck joiners and four heavy duty tie downs are suitable for tough jobs. (Model UT16-7)

5 SEALED LED LIGHTS AND WIRING

LED lights are sealed and wiring throughout trailer is sealed and encased in aluminum tubing, resisting corrosion caused by moisture.

6 TORSION AXLES

Independent suspension with four cord rubber torsion axle provides a smooth ride.

7 TONGUE JACK

1500# swivel wheel tongue jack with 10" up/down travel helps you easily move your trailer into position. (not pictured)

OTHER STANDARD FEATURES

Stainless steel hardware

POPULAR ACCESSORIES

Spare tire carrier and spare tire
Aluminum wheels
Side Kits
Ramps

UT SERIES MODELS & SPECIFICATIONS

UT12



Pictured with Accessories

- 3,500 GVWR
- Single torsion axle
- Surge or electric brakes optional.

UT16-7



Pictured with Accessories

- 7,000 GVWR
- Tandem torsion axles
- Surge or electric brakes standard on one axle.
- Surge or electric brakes optional on second axle.

UT12-2, UT16



Pictured with Accessories

- 6,000 GVWR
- Tandem torsion axles
- Surge or electric brakes optional on one axle or two.

| | Bed Width (in.) | Bed Length (in.) | Overall Width (in.) | Overall Length (in.) | Ramp Standard | Tilt Bed | Carrying Capacity w/o Brakes (lb.) | GVWR w/o Brakes (lb.) | Carrying Capacity with Brakes (lb.) | GVWR with Brakes (lb.) | Trailer Weight (lb.) | Hitch Height | Deck Height | Standard Tires* | Tire Upgrade Options* | Tongue Jack | Loading Style | Coupler (in.) |
|---------------|-----------------|------------------|---------------------|----------------------|---------------|----------|------------------------------------|-----------------------|-------------------------------------|------------------------|----------------------|--------------|-------------|-----------------|-----------------------|-------------|---------------|---------------|
| UT12 | 81 | 144 | 101 | 191 | NO | NO | 2215 | 2995 | 2720 | 3500 | 780 | 17 | 21 | G | J | YES | REAR | 2 |
| UT12-2 | 81 | 144 | 101 | 192 | NO | NO | 2095 | 2995 | 5100 | 6000 | 900 | 17 | 21 | G | J | YES | REAR | 2 |
| UT16 | 81 | 192 | 101 | 238 | NO | NO | 1995 | 2995 | 5000 | 6000 | 1000 | 17 | 21 | G | J | YES | REAR | 2 |
| UT16-7 | 81 | 192 | 101 | 238 | NO | NO | N/A | N/A | 5825 | 7000 | 1175 | 17 | 22 | G | J | YES | REAR | 2 5/16 |

*TIRE OPTIONS

| Option | Tire | Part Number | Option | Tire | Part Number |
|--------|-------------------|-------------|--------|----------------------------|-------------|
| G | ST205/75D14 Steel | 06672 | J | ST205/75R14 Aluminum - T08 | 06193 |

UT SERIES ACCESSORIES



| | UT12, UT12-2 | UT16 | UT16-7 |
|-----------------|--------------|-------|--------|
| Side Kit | 11600 | 11630 | 11630 |



| | UT12, UT12-2 | UT16 | UT16-7 |
|--------------------|--------------|-------|--------|
| Endgate Kit | 11760 | 11760 | 11760 |



| | | | |
|--------------------------|-------|-------|-------|
| Straight Ramp Kit | 06908 | 06908 | 07091 |
|--------------------------|-------|-------|-------|



| | | | |
|---------------------------|-------|-------|-------|
| Spare Tire Carrier | 11830 | 11830 | 11830 |
|---------------------------|-------|-------|-------|

For more accessories see page 22.

CH & EHHD SERIES

Whether hauling for work or play, the CH and EHHD Series have extreme strength to carry heavy equipment, cars and vehicles. Infinite tie down positions run the full length of the extruded aluminum trailer deck to secure cargo. The rear beavertail makes unloading and loading easy for all cargo, especially low ground clearance vehicles.



CH22 Pictured with Accessories

EHHD20 Pictured with Accessories

1 FULLY WELDED FRAME & DECK

The Triton difference - all-aluminum, fully welded frame provides a solid structure for years of loading and unloading. Frame and decking are fixture-built with custom extrusions, providing added strength with Triton fit and finish.

2 DESIGNED FOR LARGE VEHICLE LOADING

3 1/2" dropped rear beavertail deck for easy loading of most low ground clearance vehicles. Two jack stands provide additional stability. CH models have two heavy-duty twin ramps for rear and side loading; includes front rack for easy storage. EHHD models have a fully welded, heavy-duty bi-fold aluminum ramp with support legs for stable loading.

3 UNLIMITED TIE DOWN POINTS

Integrated channels in the side rails and three Quickslide channels in the deck provide multiple tie down points. Four heavy-duty D-ring tie downs can be easily moved and positioned in the channels to secure cargo.

4 TONGUE DESIGN

Fully welded A-frame tongue adds strength to the heavy-duty frame for towing and frequent loading and unloading of cars and equipment.

5 SEALED LED LIGHTS AND WIRING

LED lights are sealed and wiring throughout trailer is sealed and encased in aluminum tubing, resisting corrosion caused by moisture.

6 TANDEM TORSION AXLES

Independent suspension with four cord rubber torsion axles provides a smooth ride. Electric brakes standard on both axles.

7 DIAMOND PLATE FENDERS

Fender is removable on the driver's side for vehicle access and door clearance.

8 TONGUE JACK

2,000# (CH models) or 5,000# (EHHD models) tongue jack with skid plate helps you easily move your trailer into position.

POPULAR ACCESSORIES

Spare tire carrier and spare tire
Aluminum wheels
Long HD Bi-Fold Ramp Kit

CH & EHHD SERIES MODELS & ACCESSORIES

CH18, CH20, CH22



- 7,500 GVWR.
- 8' wide bed in front of fenders. Lengths of 18', 20' and 22'.
- Electric brakes standard on both axles.

Pictured with Accessories



EHHD18, EHHD20, EHHD22

- 9,995 GVWR
- 8' wide bed in front of fenders. Lengths of 18', 20' and 22'.
- Electric brakes standard on both axles.

Pictured with Accessories

| | Bed Width (in.) | Bed Length (in.) | Overall Width (in.) | Overall Length (in.) | Ramp Standard | Tilt Bed | Carrying Capacity w/o Brakes (lb.) | GVWR w/o Brakes (lb.) | Carrying Capacity with Brakes (lb.) | GVWR with Brakes (lb.) | Trailer Weight (lb.) | Hitch Height | Deck Height | Standard Tires* | Tire Upgrade Options* | Tongue Jack | Loading Style | Coupler (in.) |
|---------------|-----------------|------------------|---------------------|----------------------|---------------|----------|------------------------------------|-----------------------|-------------------------------------|------------------------|----------------------|--------------|-------------|-----------------|-----------------------|-------------|---------------|---------------|
| CH18 | 97.5 | 216 | 102 | 268 | YES | NO | N/A | N/A | 6020 | 7500 | 1480 | 19.5 | 23 | S | T | YES | SIDE/REAR | 2 5/16 |
| CH20 | 97.5 | 240 | 102 | 292 | YES | NO | N/A | N/A | 5900 | 7500 | 1600 | 19.5 | 23 | S | T | YES | SIDE/REAR | 2 5/16 |
| CH22 | 97.5 | 264 | 102 | 316 | YES | NO | N/A | N/A | 5780 | 7500 | 1720 | 19.5 | 23 | S | T | YES | SIDE/REAR | 2 5/16 |
| EHHD18 | 97.5 | 216 | 102 | 286 | YES | NO | N/A | N/A | 8185 | 9995 | 1810 | 20 | 24 | U | V | YES | REAR | 2 5/16 |
| EHHD20 | 97.5 | 240 | 102 | 310 | YES | NO | N/A | N/A | 7985 | 9995 | 2010 | 20 | 24 | U | V | YES | REAR | 2 5/16 |
| EHHD22 | 97.5 | 264 | 102 | 334 | YES | NO | N/A | N/A | 7785 | 9995 | 2210 | 20 | 24 | U | V | YES | REAR | 2 5/16 |

*TIRE OPTIONS

| Option | Tire | Part Number | Option | Tire | Part Number | Option | Tire | Part Number | Option | Tire | Part Number |
|--------|---------------------|-------------|--------|-----------------------------|-------------|--------|-------------------|-------------|--------|--------------------------|-------------|
| S | ST205/75 R15D WHITE | 13104 | T | ST205/75 R15D5 ALUMINUM T08 | 13623 | U | ST22575R15E WHITE | 14397 | V | ST22575R15E ALUMINUM T08 | 10940 |

CH & EHHD SERIES ACCESSORIES




Electric Tongue Jack Kit: 13630. Easily lift and lower the tongue. Includes foot plate and manual crank handle. Storage box, battery tray and battery required and sold separately. Can be used for CH and EHHD models.



Electric Winch Kit: 13570. Electric winch rated at 4000 lb. can be mounted in any Quickslide channel. Includes 43' of wire cable and 12V remote control with toggle switch. Storage box and battery required and are sold separately. Can be used for CH and EHHD models.



Diamond Plate Storage Box: 13450. Fits in the A-frame of the tongue. Great for storing straps and 12V battery for electric winch or electric tongue jack. Latches with a keyed lock. Can be used for CH and EHHD models.



Hauler Bi-fold Ramp Kit: 13950. Fully welded, heavy-duty bi-fold aluminum ramp with support legs for stable loading. (For CH models only. Ramp standard on EHHD models.)



Long HD Bi-Fold Ramp Kit: 18270 Fully welded, heavy-duty bi-fold aluminum ramp is longer with a flatter approach for low ground clearance vehicles. Includes support legs for stable loading. 3000 LB. vehicle weight one axle at a time. Can be used for CH and EHHD models.












EHHD Bulkhead Rack Kit: 14640. Aluminum rack mounts at the front of the deck to provide a wheel stop (EHHD models only.)



CH Spare Tire Carrier: 18603. For 5 bolt rims. Shown on CH22 on page 20. (CH models only.)

EHHD Spare Tire Carrier: 17070. For 6 bolt rims. (EHHD models only.)

ACCESSORIES

| |  |  |  |  |  |  |  |  |  |
|-------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| | Winch Mount Kit | Spare Tire Bracket | Spare Tire Carrier | Tall Spare Tire Carrier | Spare Tire Carrier Kit | Wheel Chock Kit | Wheel Chock Kit | Hauler Wheel Stop Kit | Spare Tire Carrier |
| Part Number | 04315 | 02464 | 08519 | 19161 | 18603 | 11116 Quickslide | 11104 1/4" Carriage Bolt Slot | 13666 | 22008 |
| Description | Makes bringing "dead weight" loads onto the bed easier. Stand, winch and mounting hardware standard. | Place the two plates together over the nuts. The two plates can be locked through the center hole with a padlock for added security. | Can be used in combination with a tongue jack. 13" or smaller tire. (tongue jack and spare tire not included) | Adds 5" additional ground clearance. 13" or smaller tire. (tongue jack and spare tire not included) | Add a spare tire mount, in conjunction with a spare tire to ensure an unfortunate flat tire will not ruin an entire trip. | The Quickslide Wheel Chock Kit is adjustable the full length of the Quickslide on the trailer deck. | The Wheel Chock Kit is adjustable the full length of the trailer deck. | 2x4 required. Includes two. Tie down holes drilled into sides of wheel stops. | Add a spare tire mount, in conjunction with a spare tire to ensure an unfortunate flat tire will not ruin an entire trip. |
| ATV Series | ✓ | ✓ | ✓ | ✓ | ✓ | | | | |
| ATV90 Series | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | |
| UT12-UT16 | ✓ | | | | | ✓ | | ✓ | |
| UT16-7 | ✓ | | | | | | | | |
| TILT1072 | | | | | ✓ | | | | |
| TILT1282 & 1482 | | | | | ✓ | ✓ | | ✓ | |
| FIT | ★ | | | | | + | | | ✓ |
| AUX Beavertail | | | | | ✓ | ✓ | ✓ | ✓ | |
| Car & Equipment Hauler Series | | | | | | ✓ | | ✓ | |

✓ = an optional accessory

★ = FIT1281, FIT1472, FIT1481, FIT1681

+ = Aluminum deck only, not compatible with hardwood plank deck

TIE DOWN OPTIONS



| | 5/16" D-rings with 3/8" Carriage Bolts (pair) | Bracket Tie Downs with 3/8" Carriage Bolts (2 pair) | 3/8" D-rings with 3/8" Carriage Bolts (2 pair) | 5/16" D-rings with Quickslide Attachment (pair) | 3/8" D-rings with Quickslide Attachment (pair) | Flush Tie Downs with Quickslide Attachment (pair) | Eyebolt Tie Downs with Quickslide Attachment (pair) | D-ring Kits Flush Mounted (pair) | D-rings Kits Recessed Mounted (pair) | ATV Tie Downs with 1/4" Carriage Bolts (pair) | Heavy Duty Tie Downs (pair) | ATV90 Rail Tie Downs with 5/16" Carriage Bolts | ATV90 Deck Tie Downs with 5/16" Carriage Bolts |
|------------------------------------------|-----------------------------------------------|-----------------------------------------------------|------------------------------------------------|-------------------------------------------------|------------------------------------------------|---------------------------------------------------|-----------------------------------------------------|----------------------------------|--------------------------------------|-----------------------------------------------|-----------------------------|------------------------------------------------|------------------------------------------------|
| Capacity Work Load Limit | 1,600 lbs | 750 lbs | 5,000 lbs | 1,000 lbs | 1,000 lbs | 750 lbs | 500 lbs | 500 lbs | 500 lbs | 500 lbs | 2,000 lbs | 750 lbs | 750 lbs |
| Part Number | 16838 | 11242 | 12126 | 21790 | 21807* | 08840 | 07837 | 07835 | 07834 | 08660 | 11111 | 13760 | 11920 |
| ATV Series | | | | | | | | ✓ | ✓ | 2-4 | | | |
| ATV90 Series | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | 4-8 | ✓ |
| UT12-UT16 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | |
| UT16-7 | | | | | | | | ✓ | ✓ | | 3 | | |
| TILT | 4 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | | | | |
| FIT | ✓ | | | 4 | ✓ | ✓ | ✓ | | | | | | |
| AUX Beavertail | ✓ | ✓ | 2 | ✓ | ✓ | ✓ | ✓ | | | | | | |
| Car & Equipment Hauler Series | ✓ | ✓ | 2 | ✓ | ✓ | ✓ | ✓ | | | | | | |

*FIT Series: D-rings 21807 are compatible with Quickslides on the deck surface, and are not compatible with Quickslides integrated in the left and right side rails.

✓ means it is an option. Number is how many pairs are standard.

SPECIFICATION DETAILS

Make sure that the trailer has the carrying capacity and deck space for your specific loads. Recommended tongue weight 7-10% of GVWR. Upgraded tires will change deck heights. Some tire upgrades require spacer kits. See your dealer. It is the responsibility of the purchaser to adhere to the brake laws regarding trailers. For full information on the laws in your state, contact the appropriate State Motor Vehicle Dept.

Please Note: Tilt trailer operation depends greatly on the center of gravity of the vehicle being hauled. Please consult your dealer when determining the right size trailer for you vehicle.

Surge brake options will change the overall length of trailer. Second axle brakes can be added when one is standard.

Contact your authorized Triton Trailers, LLC dealer for specifications, pricing and lead times. Due to continuous product improvements; standard features, optional accessories and specifications are subject to change without notice or obligation. Product photography may show equipment and data that is available at an additional cost. Vehicles loaded on trailers not included. Triton Trailers, LLC reserves the right to make changes to models or discontinue models without notice or obligation.

TRITON TRAILERS



www.tritontrailers.com



Snowmobile Trailers



Off Road Vehicle Trailers



Multi-Season Enclosed Trailers



Cargo & Utility Trailers



Personal Watercraft Trailers

AUTHORIZED DEALER:

Contact your local authorized Triton Trailers dealer for more information.



Transport
Canada



NATDA
North American Trailer Dealers Association

