



Quality Products Since 1968

Manufactured by:
Helm Welding (1983) Limited

Snowblowers
"Pull Type"

Standard Features


Single section
spout deflector



Heavy-duty gearbox
with heat treated gears
and tapered roller bearings




Shear bolt protection

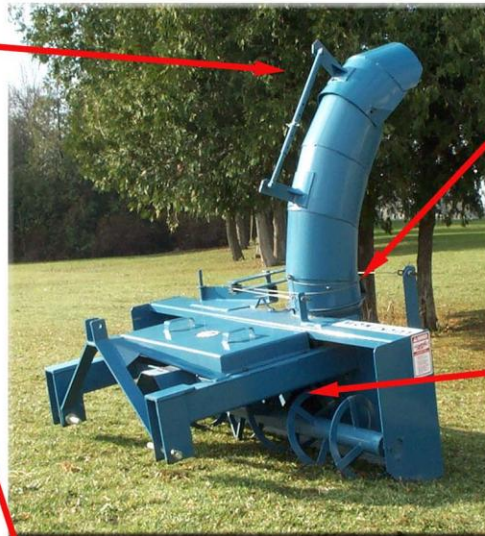

Hydraulic rotator
(cylinder or orbital motor
depending on model)



All blowers equipped
with 4 blade fan

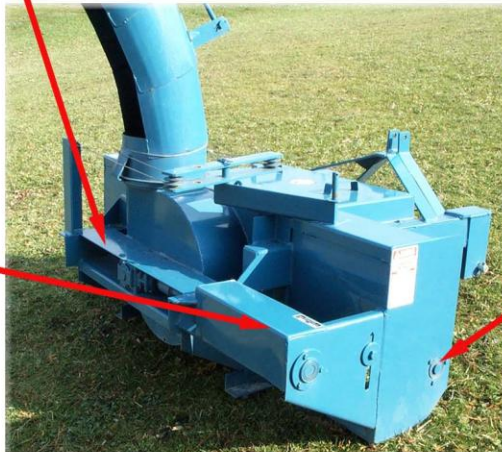

Greaseable bearings

Optional Equipment

- 3 section spout deflector
- Orbital motor chute rotator (standard on models S65 to S100)
- Heavy reinforced end plates
- Weld on cutting edge
- Reversible bolt on cutting edge
- Cylinder c/w hoses & fittings

other options available upon request

See the pictures on our website for various options.

Specification Table (Pull Type Units)

MODEL SIZE	S5PT	S6PT	S65PT	S7PT	S75PT	S100PT
Approx. Weight (Lbs.)	560	595	885	920	995	1410
Cutting Width	60	72	78	84	90	100
Cutting Height	24	24	30	30	30	33
Fan Shaft Diameter	1 3/8	1 3/8	40 mm	40 mm	40 mm	1 3/4
Fan Blades	4	4	4	4	4	4
Fan Diameter	22	22	26	26	28	28
Fan Housing Width	8	8	8	8	8	12
Fan Housing (thickness)	10 ga.	10 ga.	10 ga.	10 ga.	10 ga.	3/16
Auger Diameter	14	14	17	17	17	20
Auger Shaft Diameter	1 1/4	1 1/4	1 7/16	1 7/16	1 7/16	1 7/16
Auger Flighting Thickness	5/16	5/16	1/2	1/2	1/2	1/2
Auger Chain Size	#60	#60	#60	#60	#60	#80
Chute Diameter	12	12	12	12	12	13
Chute Length	36	36	48	48	48	48
Hydraulic Chute Rotator	Stan.	Stan.	N/A	N/A	N/A	N/A
Orbital Chute Rotator	Opt.	Opt.	Stan.	Stan.	Stan.	Stan.
Spout Deflector (single)	Stan.	Stan.	Stan.	Stan.	Stan.	Stan.
Hitch Category	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	2
Rec. H.P. (min)	20	20	35	40	50	80
Rec. H.P. (max)	35	35	70	70	90	105

Unless otherwise indicated, all dimensions are in inches with standard equipment installed.

Specifications subject to change without notice.

Certain features shown may be optional.

Manufactured By:
Helm Welding (1983) Limited
Lucknow, Ontario, Canada

P: 519-529-7000
F: 519-529-3260
www.lucknowproducts.com